



# 0221 SERIES





The 221 Series is designed to provide common-mode and differential mode filtering for power supply inputs of computer peripheral and other electronic hardware.

**Operating voltage = 115/250 Vac**  
**Operating current = 1, 2, 3, 5, 10 Amp**  
**Operating frequency = 50/60Hz**  
**Operating temperature = -20 to 50o C**  
**Diel. withstanding (line - case) = 1500 Vac**  
**Diel. withstanding (line - line) = 1500 Vdc**  
**Leakage current = 0.5 ma at 250 Vac, 60 Hz**  
**Max residual voltage after 1 sec. = 30 Volts**  
**Agency approvals = UL, CSA**

**Ordering Information**  
**AA-0221-X FF-0221-X ( X = Current required)**  
**Use AA for (0.25) tab terms**  
**Use FF for leads**

**DIMENSIONS (INCHES)**

	A	B	C	D	E
1, 2 AMP	2.00	2.38	2.78	.87	1.75
3, 5 AMP	2.00	2.38	2.78	1.13	1.75
10 AMP	2.00	2.38	2.78	1.13	2.00

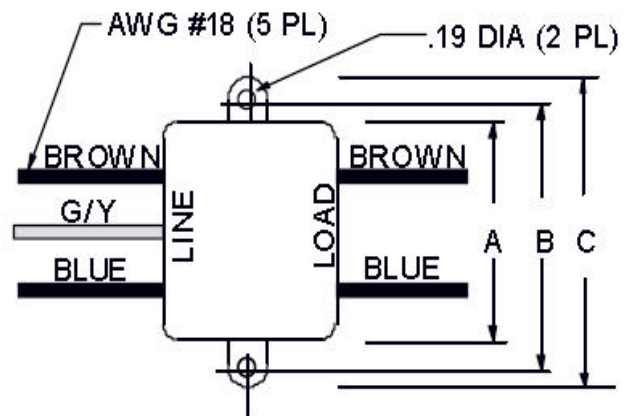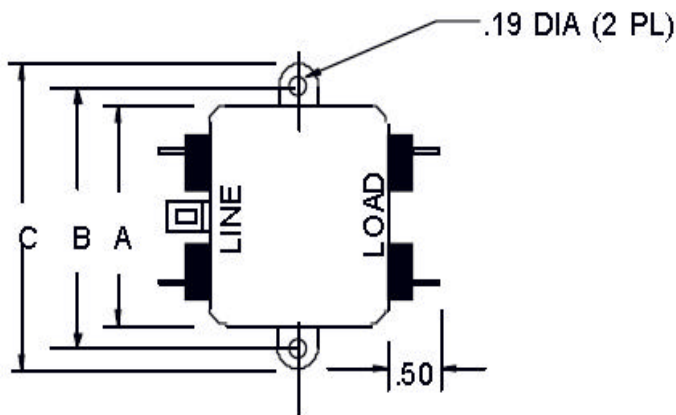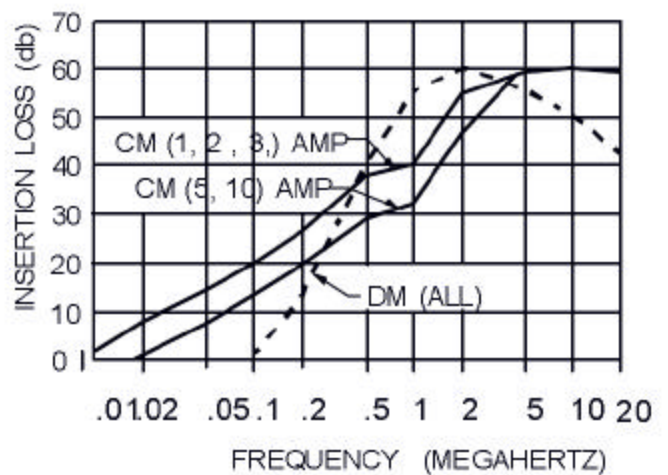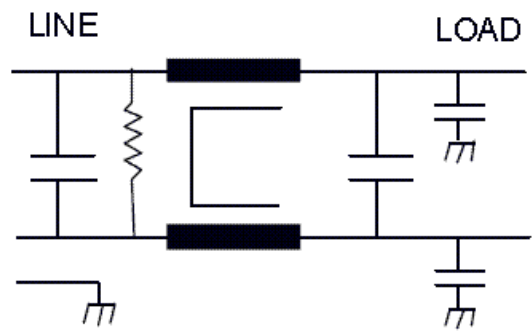

.25 TAB TERM (5 PL)

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115  
 email: info@jmkfilters.com  
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884