

Coaxial

# Power Splitter/Combiner

## ZFSC-2-6-75

2 Way-0° 75Ω 0.004 to 60 MHz



BNC version shown  
CASE STYLE: K18

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.*
Internal Dissipation	0.125W max.

\* At low range frequency band ( $f_L$  to  $10 f_L$ ), linearly derate maximum input power by 13 dB typ.

### Coaxial Connections

SUM PORT	3
PORT 1	1
PORT 2	2

### Outline Drawing

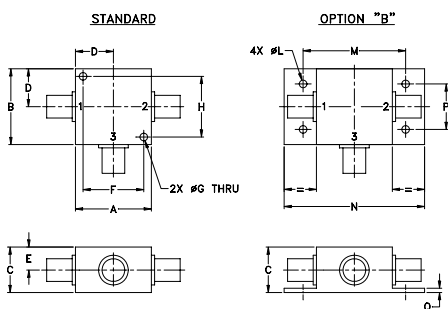

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	wt
1.25	1.25	.75	.63	.38	1.00	.125	1.000	--	--	.125	1.688	2.18	.75	.07	grams
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40	--	--	3.18	42.88	55.37	19.05	1.78	70.0

### Features

- low insertion loss, 0.4 dB typ.
- high isolation, 35 dB typ.
- rugged shielded case

### Applications

- HF/VHF
- amateur radio
- instrumentation




### Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 3.0 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)							
	L	M	U	L	M	U	L	M	U	L	M	U					
$f_L$ - $f_U$	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.					
0.004-60	30	20	35	25	20	0.5	0.8	0.4	0.8	0.7	1.0	1	2	3	0.15	0.2	0.3


L = low range [ $f_L$  to  $10 f_L$ ] M = mid range [ $10 f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]

### Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
0.004	3.14	3.13	0.01	28.34	0.09	1.19	1.28	1.27
1.000	3.09	3.09	0.00	40.45	0.00	1.13	1.09	1.09
5.000	3.13	3.13	0.00	39.93	0.02	1.14	1.09	1.09
10.000	3.17	3.17	0.00	38.14	0.04	1.16	1.10	1.10
15.000	3.21	3.20	0.00	36.25	0.05	1.18	1.12	1.12
20.000	3.24	3.24	0.00	34.56	0.05	1.20	1.15	1.15
24.000	3.27	3.27	0.00	33.32	0.05	1.22	1.17	1.17
28.000	3.30	3.30	0.00	32.12	0.06	1.24	1.19	1.19
30.000	3.31	3.31	0.00	31.53	0.05	1.26	1.21	1.21
36.000	3.36	3.37	0.00	29.82	0.06	1.30	1.25	1.25
39.000	3.39	3.39	0.00	28.97	0.06	1.32	1.27	1.27
45.000	3.44	3.45	0.01	27.34	0.07	1.36	1.32	1.32
48.000	3.46	3.47	0.01	26.55	0.07	1.38	1.34	1.34
54.000	3.52	3.53	0.01	25.01	0.08	1.42	1.39	1.38
60.000	3.58	3.59	0.02	23.54	0.09	1.47	1.43	1.43

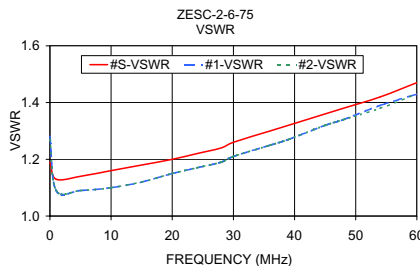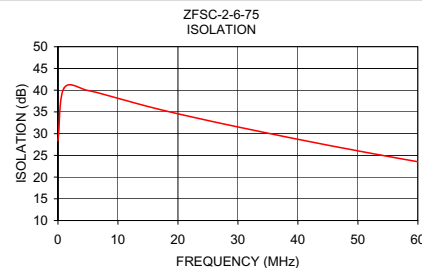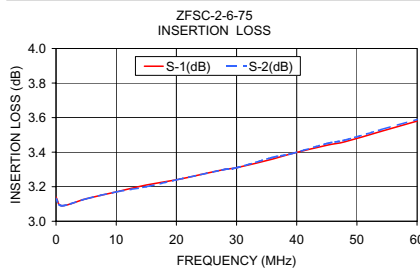

### electrical schematic

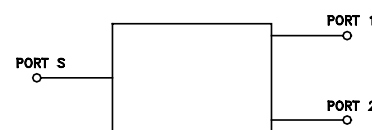

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. OR  
M94482  
ZFSC-2-6-75  
HY/TD/CP  
080310