

M5226P/FP


5-ELEMENT GRAPHIC EQUALIZER IC

DESCRIPTION


The M5226 is a 5-element graphic equalizer IC best suited to audio systems. It has a built-in 5-element resonance circuits with transistor system and an output OP amp. The IC can be used in hybrid ICs and compact sets of high-density assemblies. Its applications include radio cassette tape players, car audio systems, and music centers.

FEATURES

- The number of part can be reduced drastically for compact size.
- Graphic equalizer can be easily composed
- Low distortion THD = 0.02% (typ)
@ Flat input short
- Low noise $V_{NO} = 5\mu V_{rms}$ (typ)
@ $f = 1kHz$, Flat
- Large allowable input voltage $V_i = 2.3V_{rms}$ (typ)
@ $V_{cc} = 9V$, $f = 1kHz$, Flat

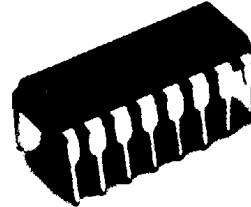

Outline 16P4(P)
2.54mm pitch 300mil DIP
(6.3mm x 19.0mm x 3.3mm)




Outline 16P2S-A(FP)
1.27mm pitch 225mil SOP
(4.4mm x 10.0mm x 1.5mm)

RECOMMENDED OPERATING CONDITIONS

- Supply voltage range $V_{cc} = 4$ to $20V$
- Rated supply voltage $V_{cc} = 20V$
- Rated power dissipation $700mW$ (P)
 $550mW$ (FP)

SYSTEM CONFIGURATION


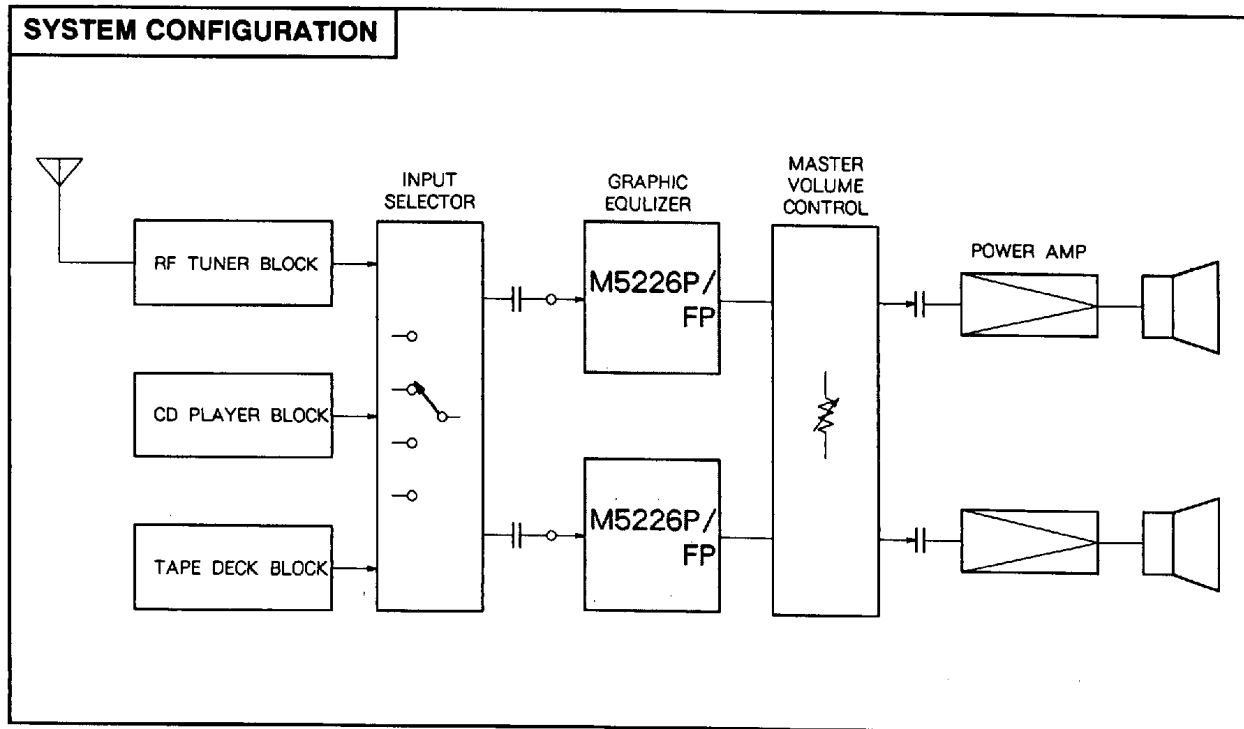


6249826 0022425 307



M5226P/FP

5-ELEMENT GRAPHIC EQUALIZER IC

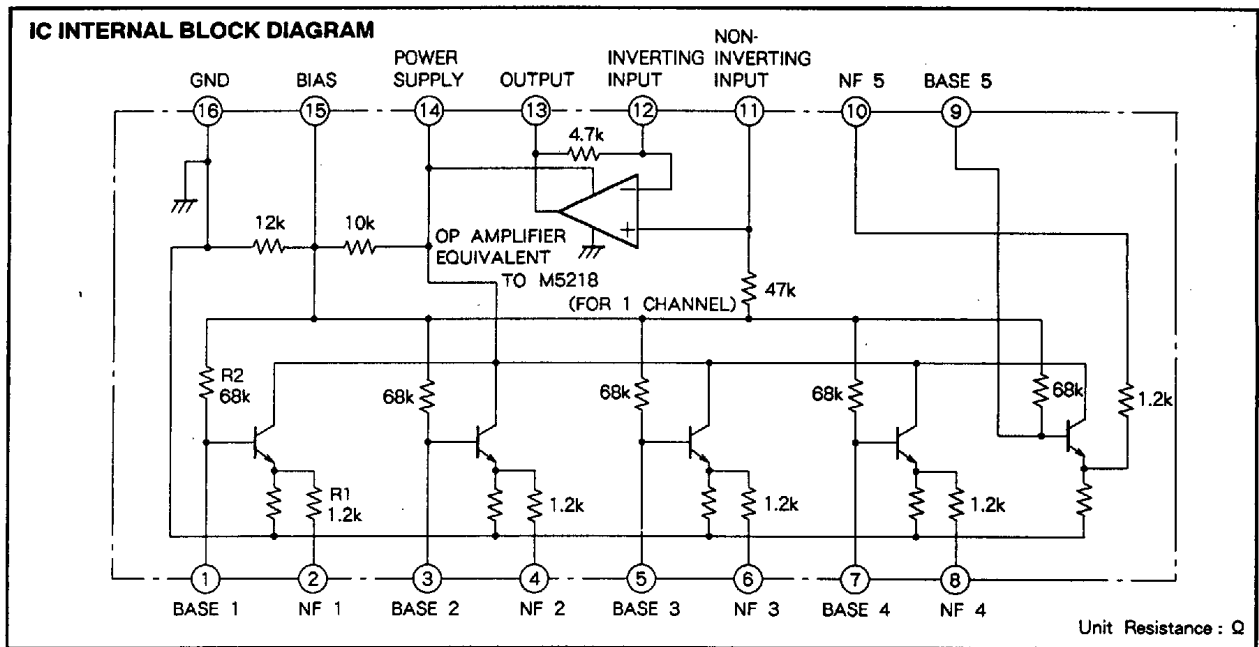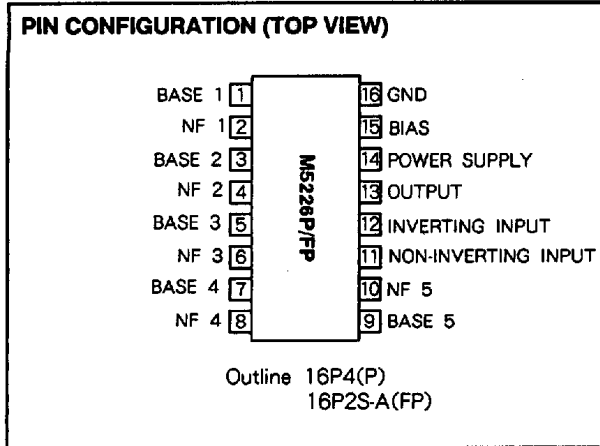

6249826 0022426 243



M5226P/FP

5-ELEMENT GRAPHIC EQUALIZER IC



ABSOLUTE MAXIMUM RATINGS (Ta = 25°C, unless otherwise noted)

Symbol	Parameter	Ratings	Unit
Vcc	Supply voltage	20	V
ILP	Load current	30	mA
Pd	Power dissipation	550(FP)/1000(DIP)	mW
Topr	Operating temperature	- 20 to + 75	°C
Tstg	Storage temperature	- 55 to + 125	°C

ELECTRICAL CHARACTERISTICS (Ta = 25°C, Vcc = 9V)

Symbol	Parameter	f (Hz)	Test conditions	Limits			Unit
				Min	Typ	Max	
Icc	Circuit current	-	Vin = 0	3.0	5.2	8.0	mA
GV(FLAT)	Flat	1k	Vin = - 10dBm	- 3.8	- 0.8	+ 2.2	dB
GV(BOOST)	Boost	108	Vin = - 10dBm	7.2	9.7	11.2	dB
		343		7.2	9.7	11.2	
		1.08k		7.2	9.7	11.2	
		3.43k		7.2	9.7	11.2	
		10.8k		7.2	9.7	11.2	
GV(CUT)	Cut	108	Vin = - 10dBm	- 12.8	- 11.3	- 8.8	dB
		343		- 12.8	- 11.3	- 8.8	
		1.08k		- 12.8	- 11.3	- 8.8	
		3.43k		- 12.8	- 11.3	- 8.8	
		10.8k		- 12.8	- 11.3	- 8.8	
THD	Total harmonic distortion	1k	Vin = 1Vrms	-	0.02	0.1	%
Vno	Output noise voltage	Input short BW : 10Hz to 30kHz (3dB) flat		-	5.0	20	μVrms






TYPICAL CHARACTERISTICS





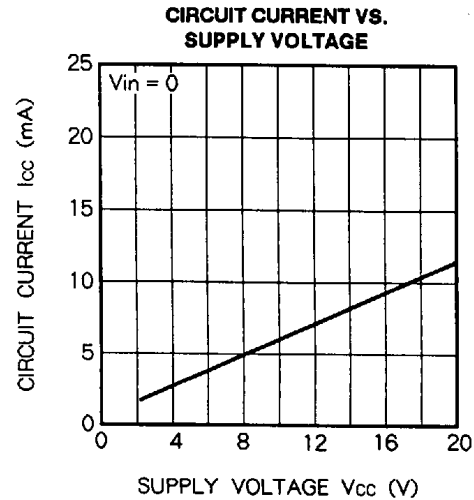
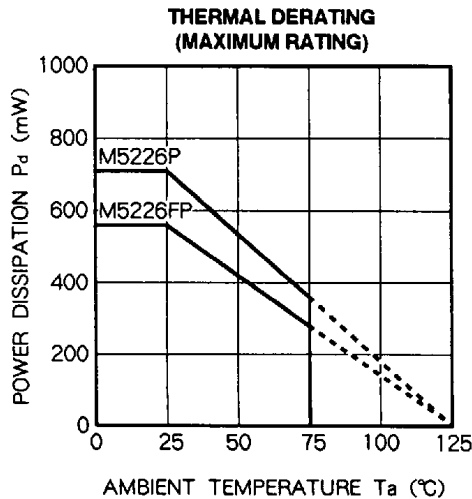


6249826 0022427 1&T



5-ELEMENT GRAPHIC EQUALIZER IC

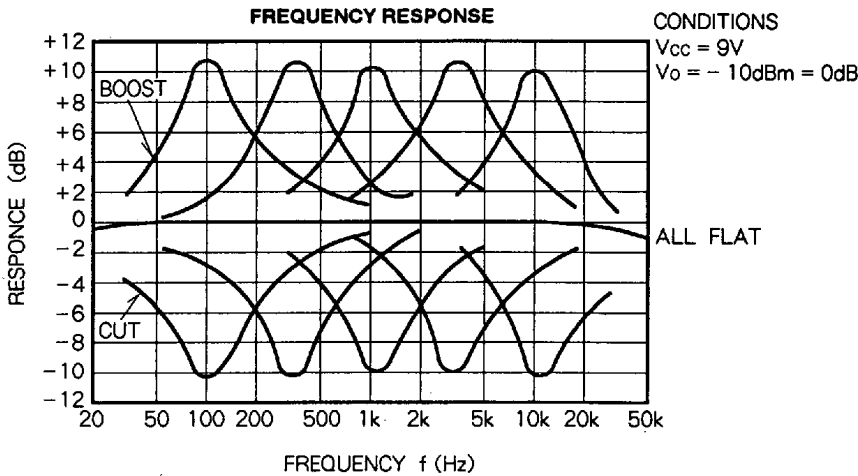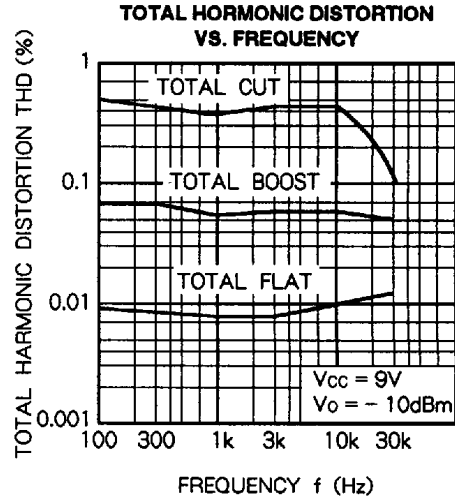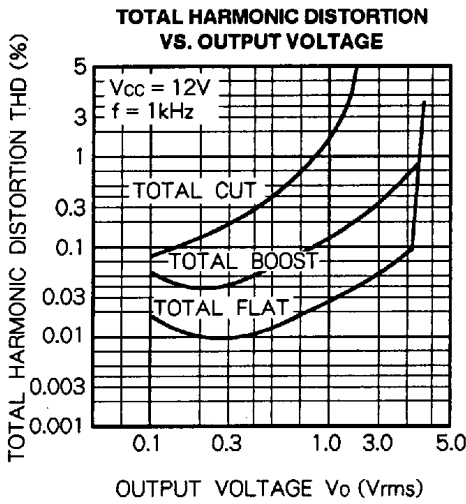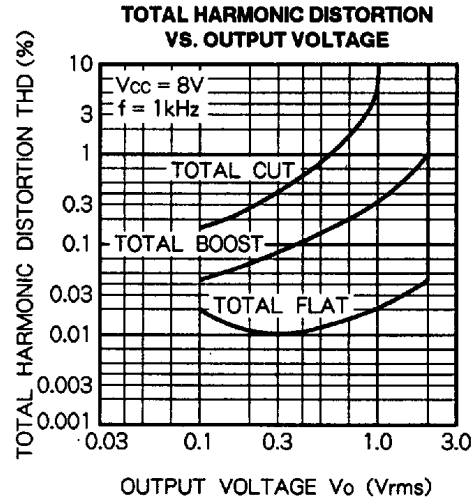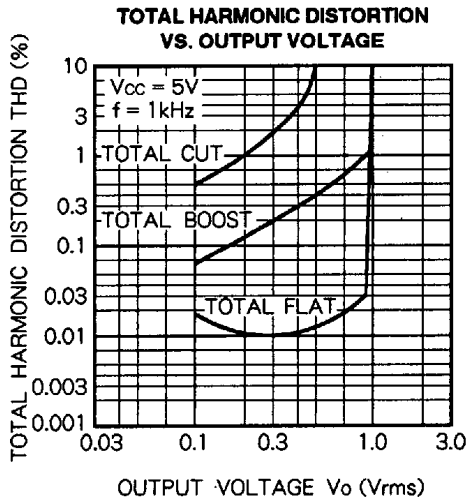


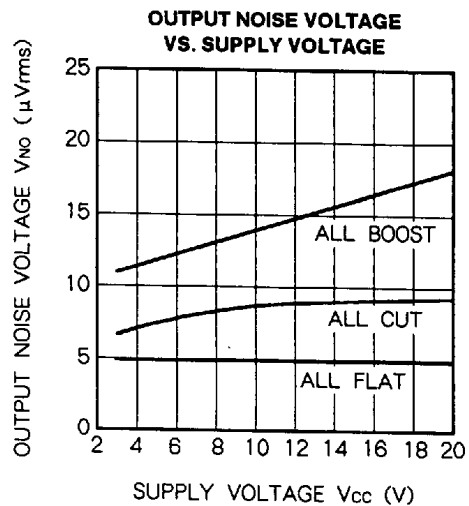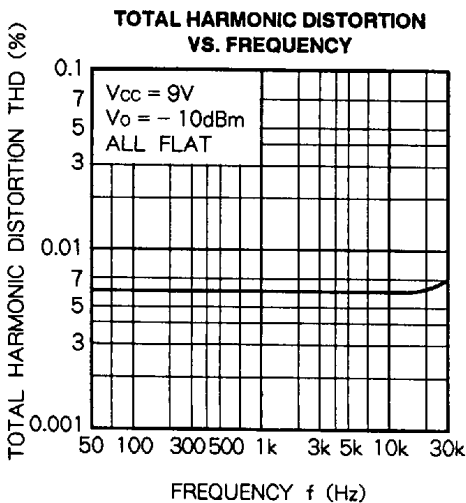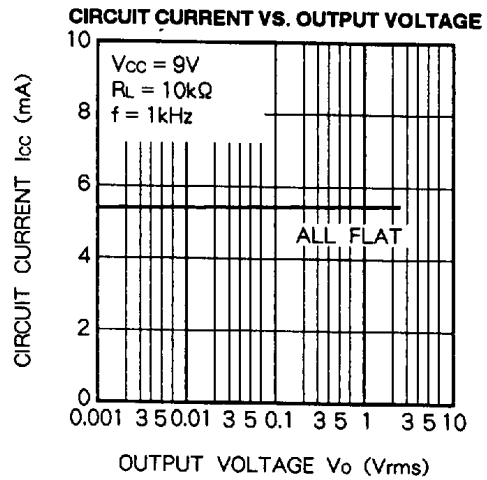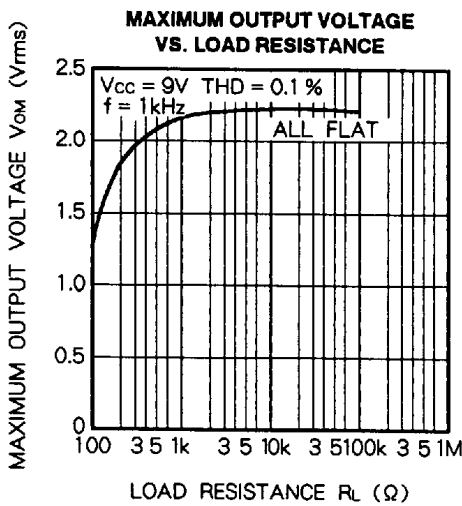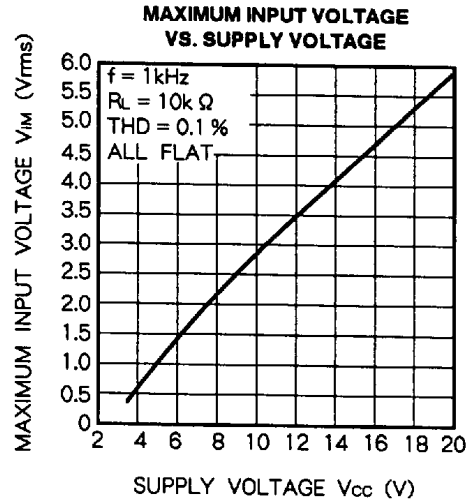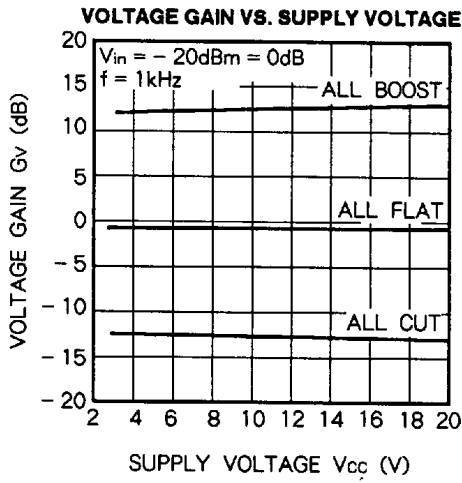

M5226P/FP

5-ELEMENT GRAPHIC EQUALIZER IC

TEST CIRCUIT (Circuit current I_{cc} , Voltage gain G_v , Total harmonic distortion THD, Output noise voltage V_{No})

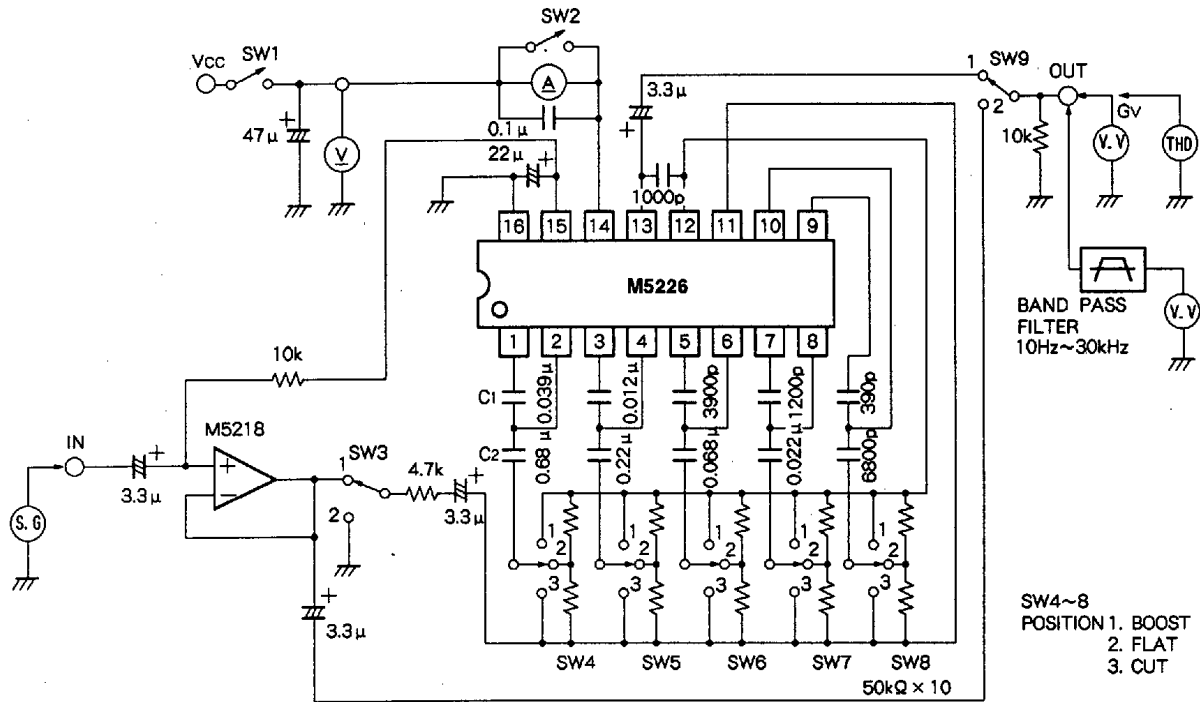

Units Resistance : Ω
Capacitance : F

TEST CIRCUIT SWITCH MATRIX

Test item	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW9
I_{cc}	OFF	1	○	○	○	○	○	1
G_v (FLAT)	ON	1	2	2	2	2	2	1
G_v (BOOST)	$f = 108\text{Hz}$	ON	1	1	2	2	2	1
	$f = 343\text{Hz}$	ON	1	2	1	2	2	1
	$f = 1.08\text{kHz}$	ON	1	2	2	1	2	1
	$f = 3.43\text{kHz}$	ON	1	2	2	2	1	1
	$f = 10.8\text{kHz}$	ON	1	2	2	2	2	1
G_v (CUT)	$f = 108\text{Hz}$	ON	1	3	2	2	2	1
	$f = 343\text{Hz}$	ON	1	2	3	2	2	1
	$f = 1.08\text{kHz}$	ON	1	2	2	3	2	1
	$f = 3.43\text{kHz}$	ON	1	2	2	2	3	1
THD	ON	1	2	2	2	2	2	1
V_{No} (ALLFLAT)	ON	2	2	2	2	2	2	1

Note : The mark "○" applies to both 1 and 2


6249826 0022430 774



M5226P/FP

5-ELEMENT GRAPHIC EQUALIZER IC


APPLICATION EXAMPLE

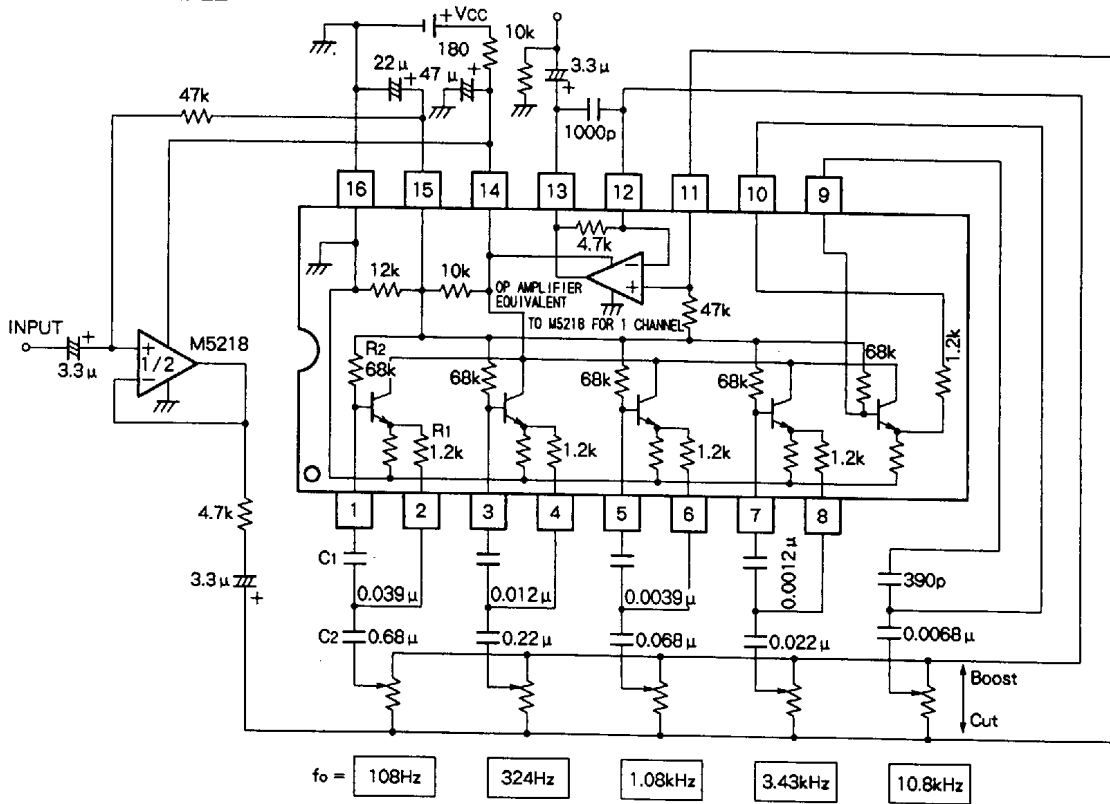


RESONANCE FREQUENCY $f_o = \frac{1}{2\pi\sqrt{C1 \cdot C2 \cdot R1 \cdot R2}}$ (Hz) Units Resistance : Ω Capacitance : F

PRINTED CIRCUIT BOARD FOR CIRCUIT TESTING (TYPICAL APPLICATION EXAMPLE)

PC BOARD PARTS-PLACEMENT DIAGRAM (COPPER FOIL SIDE)

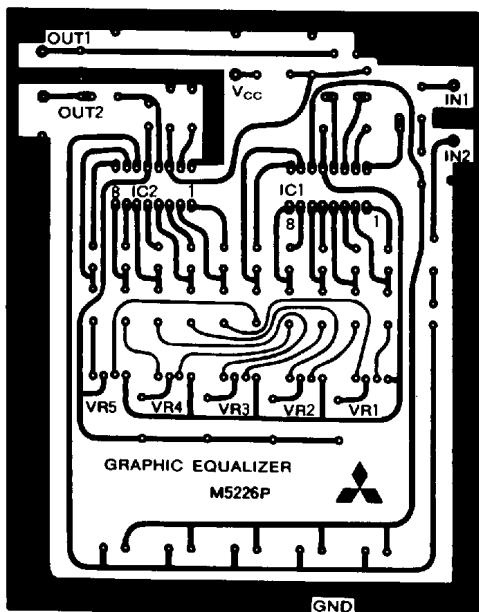

PC BOARD PARTS-PRACEMENT-DIAGRAM (PARTS SIDE)

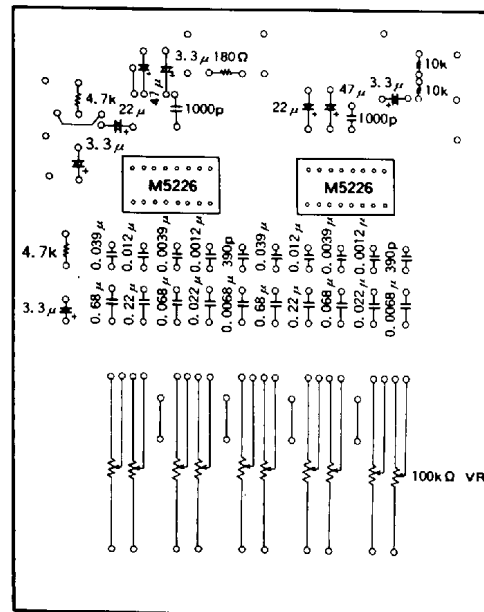

6249826 0022431 600



APPLICATION EXAMPLE (7-ELEMENT)

