

QUINT-PS-100-240AC/48DC/ 5

Order No.: 2866255



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2866255>

DIN rail power supply unit, primary-switched mode, 1-phase, output: 48 V DC / 5 A

Commercial data	
EAN	4017918951191
Pack	1 pcs.
Customs tariff	85044081
Weight/Piece	1.5732 KG
Catalog page information	Page 484 (IF-2007)

Product notes

WEEE/RoHS-compliant since: 05/08/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Input data	
Nominal input voltage	100 V AC ... 240 V AC
AC input voltage range	85 V AC ... 264 V AC
DC input voltage range	90 V DC ... 350 V DC
AC frequency range	45 Hz ... 65 Hz

DC frequency range	0 Hz
Current consumption	Approx. 2.2 A (120 V AC)
	1.2 A (230 V AC)
Nominal power consumption	240 W
Inrush surge current	< 15 A (typical)
Power failure bypass	> 50 ms (120 V AC)
	> 50 ms (230 V AC)
Input fuse	6.3 A (slow-blow, internal)
Permissible backup fuse	10 A
	16 A (characteristic B)
Name of protection	Transient surge protection
Protective circuit/component	Varistor
Output data	
Nominal output voltage	48 V DC \pm 1%
Setting range of the output voltage	40 V DC ... 56 V DC
Output current	5 A (up to 60°C)
	7.5 A (with POWER BOOST)
Connection in parallel	Yes, for redundancy and increased capacity
Connection in series	Yes
Max. capacitive load	Unlimited
Residual ripple	< 30 mV _{PP}
Peak switching voltages nominal load	< 50 mV _{PP} (20 MHz)
Maximum power dissipation idling	2 W
Power loss nominal load max.	24 W
Short circuit current	Approximately I _{BOOST} 7.5 A
General data	
Width	85 mm
Height	130 mm
Depth	125 mm
Weight	1.3 kg
Operating voltage display	LED green
Efficiency	> 91 %
Insulation voltage input/output	4 kV (type test)
	2 kV (routine test)

Degree of protection	IP20
Class of protection	I, with PE connection
MTBF	> 500 000 h in acc. with IEC 61709 (SN 29500)
Ambient temperature (operation)	-25 °C ... 70 °C (> 60 °C derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	95 % (at 25 °C, no condensation)
Mounting position	Horizontal DIN rail NS 35, EN 60715
Assembly instructions	Can be aligned: Horizontal 0 cm, vertical 5 cm
Electromagnetic compatibility	Conformance with EMC directive 89/336/EEC
Emitted interference	EN 50081-2
Immunity to interference	EN 61000-6-2:2005
Standard - Safety of transformers	EN 61558-2-17
Standard - Electrical safety	EN 60950/VDE 0805 (SELV)
	EN 61558-2-17
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
Standard - Safe isolation	DIN VDE 0100-410
	DIN VDE 0106-1010
Standard – Limitation of mains harmonic currents	EN 61000-3-2
Standard – Equipment safety	GS (tested safety)
Certificate	CB Scheme
UL approvals	UL/C-UL Recognized UL 60950
	UL/C-UL listed UL 508

Connection data, input

Type of connection	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Screw thread	M3

Connection data, output

Type of connection	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm

Signaling

Output name	DC OK active
Output description	$U_{OUT} > 0.9 \times U_N$: High signal
Maximum switching voltage	≤ 24 V
Output voltage	+ 24 V DC
Maximum inrush current	≤ 20 mA
Continuous load current	≤ 40 mA
Status display	"DC OK" LED green
Note on status display	$U_{OUT} < 0.9 \times U_N$: LED flashing
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Screw thread	M3
Output name	DC OK floating
Output description	Relay contact, $U_{OUT} > 0.9 \times U_N$: Contact closed
Maximum switching voltage	≤ 60 V AC/DC
Maximum inrush current	≤ 0.5 A
Continuous load current	≤ 0.5 A
Status display	"DC OK" LED green
Note on status display	$U_{OUT} < 0.9 \times U_N$: LED flashing

Certificates / Approvals



Certification

CB, CUL, CUL Listed, UL, UL Listed

Accessories


Item	Designation	Description
------	-------------	-------------

General


2938206	QUINT-PS-ADAPTERS7/2	Assembly adapter for QUINT POWER 10A on S7-300 rail
2938235	UWA 182/52	Universal wall adapter

Diagrams/Drawings

Block diagram

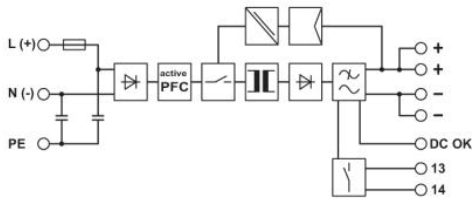

Diagram

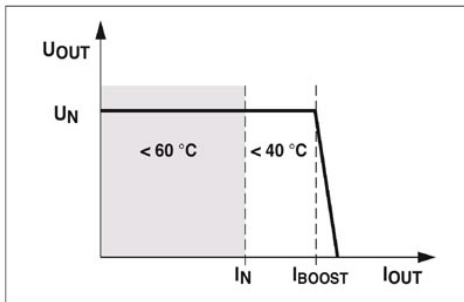

POWER BOOST

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;