


SV/SVP Series 100W-300W power supplies



Universal AC Input

VDE/FCC Level B EMI

Low Profile

Worldwide Safety Agency Approvals

System Interface Signals

Broad Offering

Output Current Surge Capability

Low Cost and Short Lead Time

Covered or Uncovered

Lambda's SV Series are the only 100W to 300W power supplies that offer either auto-selecting AC input or power factor corrected AC input in the same mechanical package. This allows you to optimize system cost, features and assembly time by integrating the model that best suits your application. Since the PFC and non-PFC models are form and fit compatible, the SV Series is a no-risk solution for systems that may require upgrading to power factor correction in the future.

The SV Series is available in 100W, 150W and 250W single output models, and 130W, 170W, 200W, & 300W multiple output models. For applications such as computer peripherals, embedded processes, and communications equipment, the SV Series provides unequalled cost, flexibility and performance.

Similar products		Page
RP	Higher Power Multiple Output	54
ZW	PCB Single Output	14
SWT	PCB Triple Output	18
LW	Chassis, Low Power, Low Profile	20

AC Input	SV Models: 85-132VAC, 180-264 VAC (auto-selecting input) 47-63Hz. SVP Models: 90-132VAC, 187-264 VAC (auto-selecting input), 47-63 Hz on 100-150W models. 85-265VAC, 47-63 Hz on 170-300W models.
Fusing	AC line is fused internally.
Power Factor Correction	IEC555-2 and EN60555-2 (SVP models only).
Input Transient Protection ..	IEEE C62.41-1991 location category A2. ENG1000-4 (-2,-3,-4,-5,-6). IEC1000-4 (-2,-3,-4,-5,-6). (A3 with external MOV's). IEC801, -2, -3, -4, -5 Class 3.
Inrush Current Limiting	75A typical for cold startup at 25°C.
Surge Current Capability	Auxiliary outputs are capable of providing a 10 second surge of 3 times the output current rating with a 50% duty cycle. Total power must always remain within package ratings.
EMI	Conducted EMI conforms to FCC Part 15, Subpart J, Class B and VDE 0871, Curve B.
Output Voltage Adj Range ..	±5% user adjustable on single output models and on main output of multiples. Auxiliary outputs are fixed.
Line Regulation	0.5% from low line to high line.
Load Regulation	1% from no load to full load on main output. 5% for 50% load variations on auxiliaries.
Ripple and Noise	2% pk-pk typical.
Preload	25% preload required on the main output of SVT115 and SVQ130, and on +12V auxiliary output of SVT170, SVT300, SVQ200, SVQ300.
Overcurrent Protection	Limits output current to 140% (typical) of maximum rating on main output.
Overvoltage Protection	OV protection is provided on 5V single output models and main outputs of multiple output models. The unit will reset after input is recycled if OV condition is removed.
Short Circuit Protection	All outputs are protected from temporary short circuits.
Cooling	Ratings are provided for convection cooling.
Operating Temperature Range	0°C to +60°C with derating above +50°C.
Storage Temperature	-30°C to +85°C.
Isolation	Input to output – 3000VRMS. Input to chassis – 1500VRMS. Output to ground – 500VRMS.
Vibration and Shock	Meets MIL-STD-810E specification for transportation.
Monitoring Signals	AC Power Fail and DC Output Good Signals (Open Collector, Conductance Signal) are standard features.
Remote Sensing	Remote sensing capability is provided on the single output models and main outputs only. (0.5V Maximum IR drop across load cables).
Input and Output Connections	Molex connectors, bussbars, terminal strips. Molex connectors only for SVS100, SVT115 and SVQ130 models.
Safety Agency Approval	UL1950, CSA22.2 No 234, VDE/EN60950, and CE mark (low voltage directive).
Option	Add Z for fully enclosed unit.
Warranty	1 year.





POWER(W)	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4	MODEL
Single Output					
100	+5V@20A	-	-	-	SVS100-5
100	+5V@20A	-	-	-	SVPS10-5
100	+12V@8.3A	-	-	-	SVS100-12
100	+12V@8.3A	-	-	-	SVPS10-12
100	+24V@4.3A	-	-	-	SVS100-24
100	+24V@4.3A	-	-	-	SVPS10-24
150	+5V@30A	-	-	-	SVS150-5
150	+5V@30A	-	-	-	SVPS15-5
150	+12V@12.5A	-	-	-	SVS150-12
150	+12V@12.5A	-	-	-	SVPS15-12
150	+24V@6.25A	-	-	-	SVS150-24
150	+24V@6.25A	-	-	-	SVPS15-24
250	+5V@50A	-	-	-	SVPS25-5
250	+12V@20.8A	-	-	-	SVPS25-12
250	+15V@16.7A	-	-	-	SVPS25-15
250	+24V@10.5A	-	-	-	SVPS25-24
250	+48V@5.2A	-	-	-	SVPS25-48
Triple Output					
115	+5V@15A	+12V@2.5A	-12V@1A	-	SVT115-1
115	+5V@15A	+12V@2.5A	-12V@1A	-	SVPT115-1
115	+5V@15A	+15V@2.5A	-15V@1A	-	SVPT115-2
115	+5V@15A	+15V@2.5A	-15V@1A	-	SVT115-2
170	+5V@22A	+12V@3.8A	-12V@1.5A	-	SVT170-1
170	+5V@22A	+12V@3.8A	-12V@1.5A	-	SVPT170-1
300	+5V@38A	+12V@6A	-12V@3A	-	SVT300-1
300	+5V@38A	+12V@6A	-12V@3A	-	SVPT300-1
Quad Output					
130	+5V@15A	+12V@2.5A	-12V@1A	+24V@.8A	SVPQ130-1
130	+5V@15A	+12V@2.5A	-12V@1A	-5V@1.5A	SVPQ130-2
130	+5V@15A	+15V@2.5A	-15V@1A	+24V@.8A	SVPQ130-3
130	+5V@15A	+15V@2.5A	-15V@1A	-5V@1.5A	SVPQ130-4
130	+5V@15A	+12V@2.5A	-12V@1A	+24V@.8A	SVQ130-1
130	+5V@15A	+12V@2.5A	-12V@1A	-5V@1.5A	SVQ130-2
200	+5V@22A	+12V@3.8A	-12V@1.5A	+24V@1.5A	SVPQ200-1
200	+5V@22A	+12V@3.8A	-12V@1.5A	-5V@5A	SVPQ200-2
200	+5V@22A	+12V@3.8A	-12V@1.5A	+24V@1.5A	SVQ200-1
200	+5V@22A	+12V@3.8A	-12V@1.5A	-5V@5A	SVQ200-2
200	+5V@22A	+15V@3.8A	-15V@1.5A	+24V@1.2A	SVPQ200-3
200	+5V@22A	+15V@3.8A	-15V@1.5A	+24V@1.2A	SVQ200-3
300	+5V@38A	+12V@6A	-12V@3A	+24V@2A	SVPQ300-1
300	+5V@38A	+12V@6A	-12V@3A	-5V@8A	SVPQ300-2
300	+5V@38A	+12V@6A	-12V@3A	+12V@2A	SVPQ300-5
300	+5V@38A	+12V@6A	-12V@3A	+24V@2A	SVQ300-1
300	+5V@38A	+12V@6A	-12V@3A	-5V@8A	SVQ300-2



SV/SVP Series 100W-300W power supplies

SVS100/SVPS10
SVT115/SVPT115
SVQ130/SVPQ130
SVS150/SVPS15

SVT170/SVPT170
SVQ200/SVPQ200
SVPS25

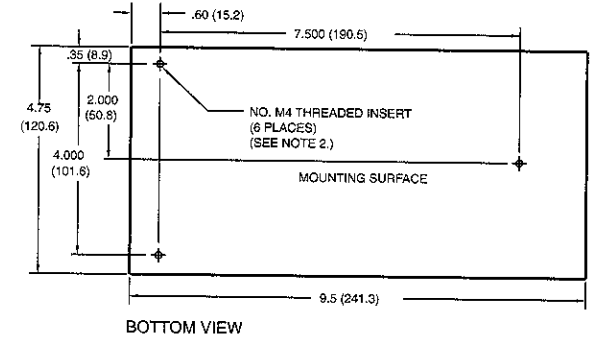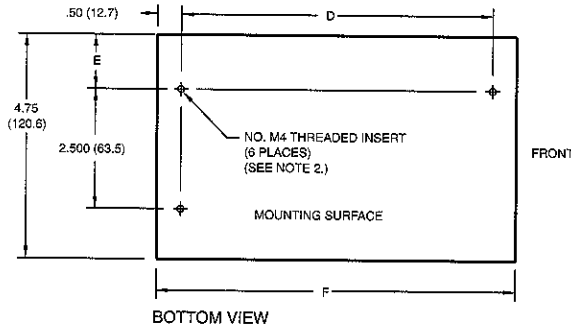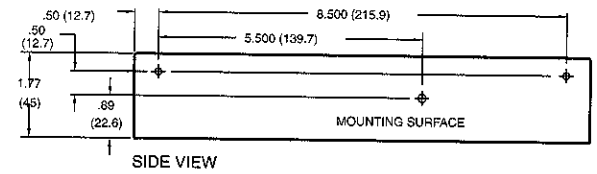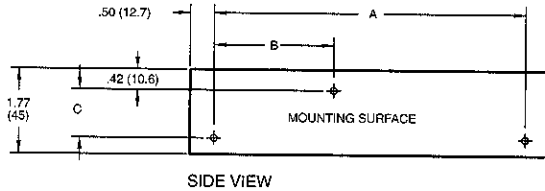

DIMENSIONS:

MODEL	A	B	C	D	E	F
SVS100	6.50 (165.1)	2.50 (63.5)	0.50 (12.7)	6.50 (165.1)	1.17 (29.8)	7.50 (190.5)
SVPS10	6.50 (165.1)	2.50 (63.5)	0.50 (12.7)	6.50 (165.1)	1.17 (29.8)	7.50 (190.5)
SVT115	7.50 (190.5)	2.50 (63.5)	1.00 (25.4)	7.50 (190.5)	1.17 (29.8)	8.50 (215.9)
SVPT115	7.50 (190.5)	2.50 (63.5)	1.00 (25.4)	7.50 (190.5)	1.17 (29.8)	8.50 (215.9)
SVQ130	7.50 (190.5)	2.50 (63.5)	1.00 (25.4)	7.50 (190.5)	1.17 (29.8)	8.50 (215.9)
SVPQ130	7.50 (190.5)	2.50 (63.5)	1.00 (25.4)	7.50 (190.5)	1.17 (29.8)	8.50 (215.9)
SVS150	7.50 (190.5)	2.50 (63.5)	1.00 (25.4)	7.50 (190.5)	1.17 (29.8)	8.50 (215.9)
SVPS15	7.50 (190.5)	2.50 (63.5)	1.00 (25.4)	7.50 (190.5)	1.17 (29.8)	8.50 (215.9)

NOTE:
 1. DIMENSIONS ARE IN INCHES EXCEPT DIMENSIONS IN () ARE IN MM.
 2. CUSTOMER MOUNTING SCREWS (NO. M4) MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 1/4 INCH (6.3)

Net Weight (Lbs)



SVS100	1.7
SVPS10	2.1
SVT115	2.1
SVQ130	2.1
SVPQ130	2.8
SVS150	2.2
SVPS15	2.9

NOTE:
 1. CUSTOMER MOUNTING SCREWS (NO. M4) MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 1/4 INCH (6.3)
 2. DIMENSIONS ARE IN INCHES EXCEPT DIMENSIONS IN () ARE IN MM.

WEIGHT:

	NET	LBS
SVT170	2.5	
SVPT170	2.9	
SVQ200	2.5	
SVPQ200	2.9	
SVPS25	2.9	

SVT300/SVPT300
SVQ300/SVPQ300

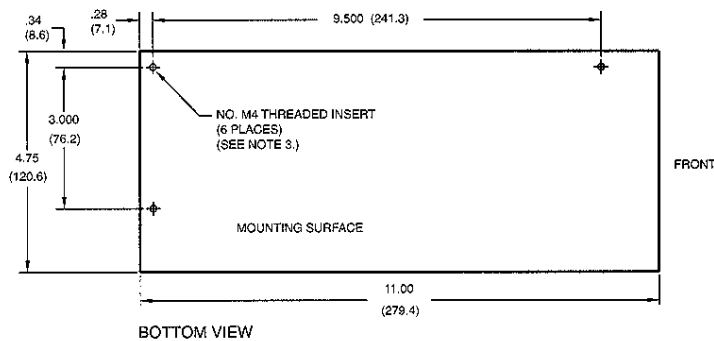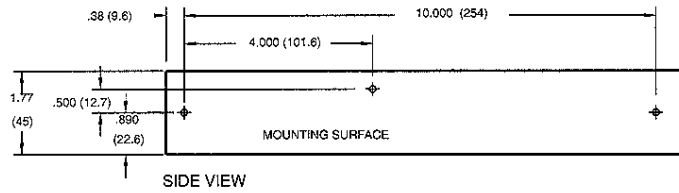

BOTTOM VIEW

- NOTE:**
1. DIMENSIONS ARE IN INCHES EXCEPT DIMENSIONS IN () ARE IN MM.
 2. CUSTOMER MOUNTING SCREWS (NO. M4) MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THEN 1/4 INCH (6.3)

WEIGHT

NET	LBS
SV300	3.2
SVP300	3.7