




PRODUCT SPECIFICATION

COSMO ELECTRONICS CO., LTD.	PHOTO MOS RELAYS: KAQW210TSB	SHEET 1 OF 10
---------------------------------------	--	---------------

• OUTSIDE DIMENSION :

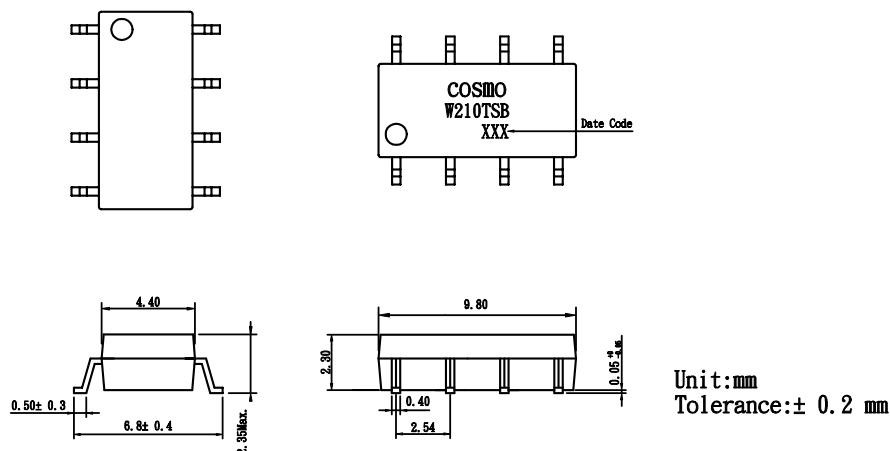

• Turn on/Turn off time

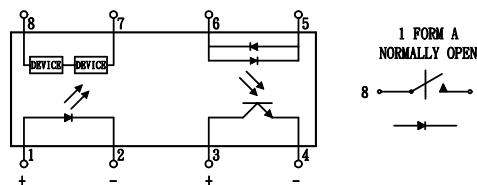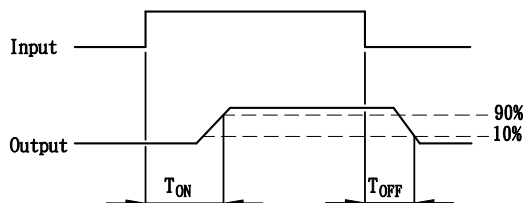

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$)

Emitter (Input)

Reverse Voltage	5.0V
Continuous Forward Current	50mA
Peak Forward Current (1s)	1A
Power Dissipation	100mW
Derate Linearly from 25°C	$1.3\text{mW}/^\circ\text{C}$

Detector (Output)

Output Breakdown Voltage	$\pm 350\text{V}$
Continuous Load Current	$\pm 130\text{mA}$
Power Dissipation	500mW

General Characteristics

Isolation Test Voltage	1500VAC _{RMS}
Isolation Resistance	
$V_{10}=500\text{V}, T_A=25^\circ\text{C}$	$\geq 10^{10}\Omega$
Total Power Dissipation	550mW

Derate Linearly from 25°C	$2.5\text{mW}/^\circ\text{C}$
Storage Temperature Range	-40 to $+150^\circ\text{C}$
Operating Temperature Range	-40 to $+85^\circ\text{C}$
Junction Temperature	100°C
Soldering Temperature, 2mm from case, 10 sec.	260°C

PRODUCT SPECIFICATION

COSMO
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:
KAQW210TSB

SHEET 2 OF 10

Characteristics

($T_A = 25^\circ \text{C}$)

Description	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Emitter (Input)						
Forward Voltage	V_F		1.2	1.5	V	$I_F = 10\text{mA}$
Operation Input Current	I_{FON}			5	mA	$V_L = \pm 20\text{V}$, $I_L = 100\text{mA}$, $t = 10 \text{ms}$
Recovery Input Current	I_{FOFF}	0.05			mA	$V_L = \pm 20\text{V}$, $I_L < 5\mu\text{A}$
Detector (Output)						
Output Breakdown Voltage	V_B	350			V	$I_B = 50\mu\text{A}$
Output Off-State Leakage	$I_{T(OFF)}$		0.7	2	μA	$V_T = 100\text{V}$, $I_F = 0\text{mA}$
I/O Capacitance	C_{ISO}		6		pF	$I_F = 0$, $f = 1\text{MHz}$
ON Resistance	R_{ON}		28	35	Ω	$I_L = 100\text{mA}$, $I_F = 10\text{mA}$
Turn-on Time	T_{ON}		0.1	0.5	ms	$I_F = 10\text{mA}$, $V_L = \pm 20\text{V}$
Turn-off Time	T_{OFF}		0.3	0.5	ms	$t = 10\text{ms}$, $I_L = \pm 100\text{mA}$

Mos Relay Schematic and Wiring Diagrams

Type	Schematic	Output configuration	Load	Con-nection	Wiring diagram
KAQW210TSB		1a	AC/DC	-	

PRODUCT SPECIFICATION


COSMO
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:
KAQW210TSB


SHEET 3 OF 10

DATA CURVE


Load current vs. ambient temperature
Allowable ambient temperature:
-40° C+85° C

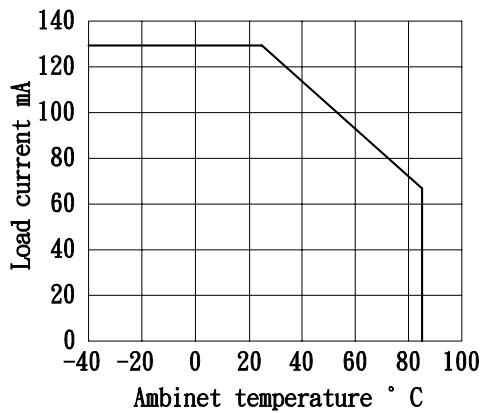


On resistance vs. ambient temperature
Across terminals 7 and 8 pin
LED current: 5mA
Continuous load current: 130 mA(DC)

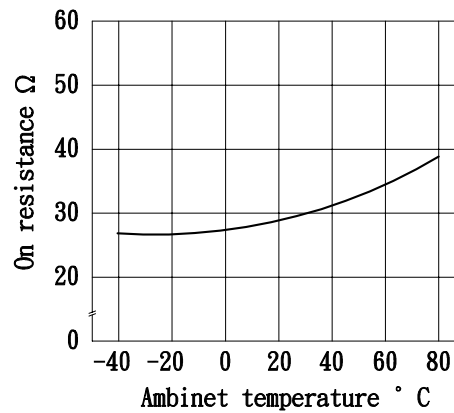

Turn on time vs. ambient temperature
Load voltage 350 V(DC)
LED current :5mA
Continuous load current: 130mA(DC)

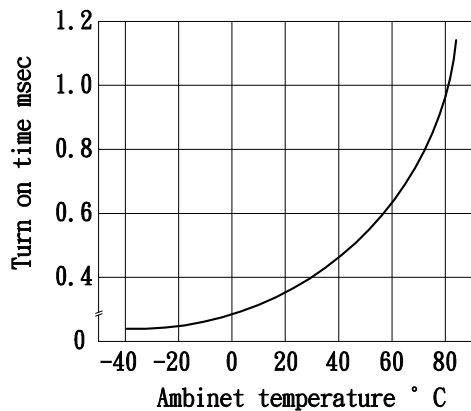

Turn off time vs. ambient temperature
LED current: 5mA;Load voltage: 350V(DC)
Continuous load current: 130mA(DC)

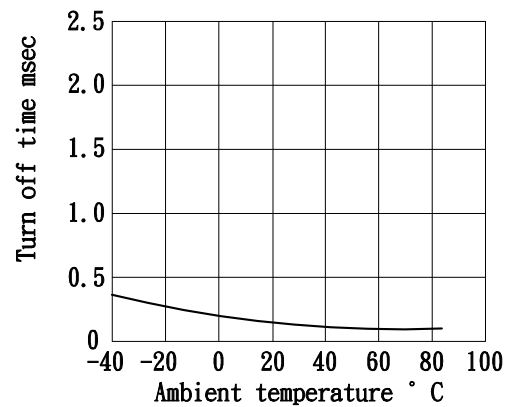


PRODUCT SPECIFICATION

COSMO
ELECTRONICS CO., LTD.


PHOTO MOS RELAYS:
KAQW210TSB

SHEET 4 OF 10


LED operate vs. ambient temperature
Load voltage: 350V(DC)
Continuous load current: 130mA(DC)

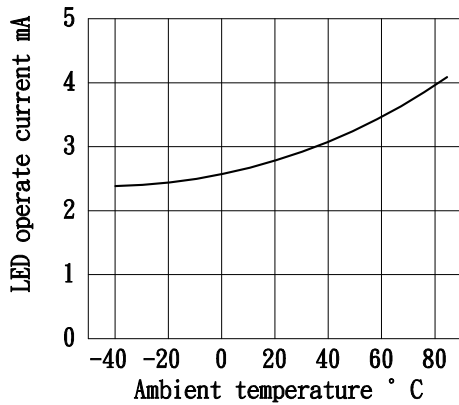


LED turn off current vs. ambient temperature
Load voltage: 350V(DC)
Continuous load current: 130mA(DC)

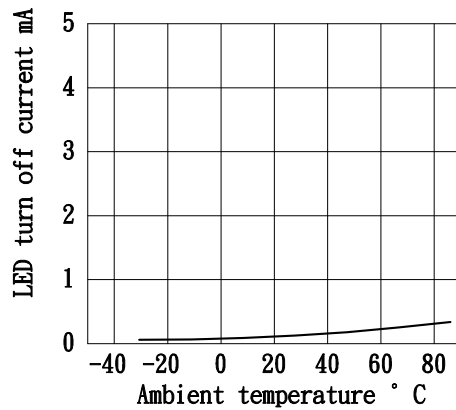

LED dropout voltage vs. ambient temperature
LED current: 5 to 50mA

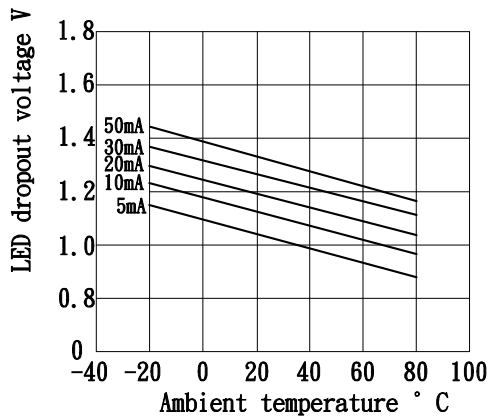

Voltage vs. current characteristics of output at MOS FET portion
Measured portion: across terminals 7 and 8 pin
Ambient temperature: 25°C

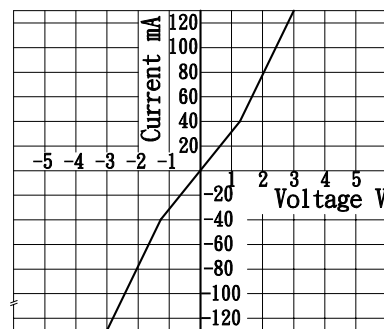


PRODUCT SPECIFICATION

COSMO
ELECTRONICS CO., LTD.


PHOTO MOS RELAYS:
KAQW210TSB

SHEET 5 OF 10


LED forward current vs. turn on time
Across terminals 7 and 8pin; Load voltage: 350V(DC); Continuous load current: 130mA(DC); Ambient temperature: 25° C

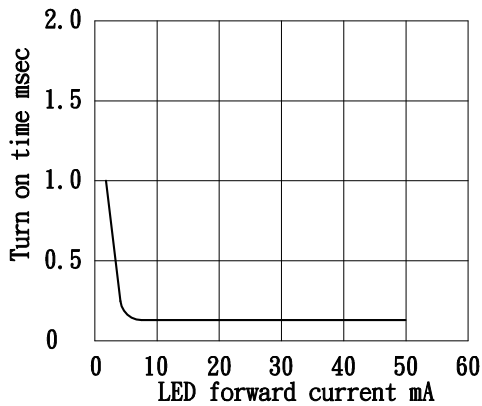


Off state leakage current
Across terminals 7 and 8pin
Ambient temperature: 25° C

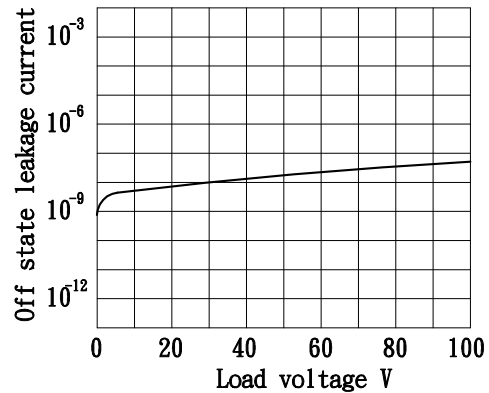

LED forward current vs. turn off time
Across terminals 7 and 8pin; Load voltage: 350V(DC); Continuous load current: 130 mA(DC); Ambient temperature: 25° C

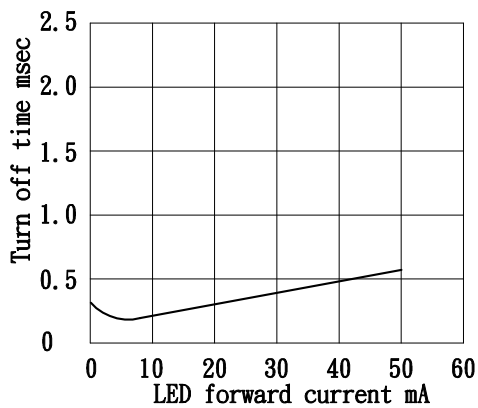

Applied voltage vs. output capacitance
Across terminals 7 and 8pin
Frequency: 1MHz; Ambient temperature: 25° C

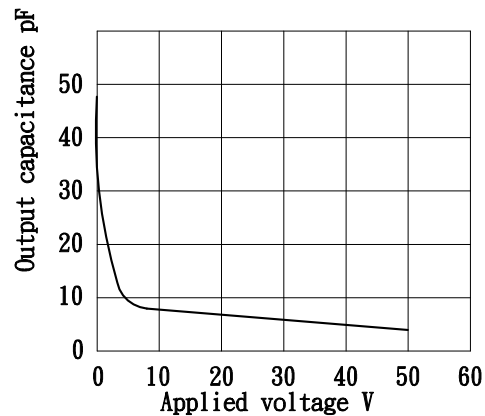

PRODUCT SPECIFICATION

COSMO
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:
KAQW210TSB


SHEET 6 OF 10

USING METHODS

Examples of resistance value to control LED forward current I_F


Photo MOSRELAY

($I_F = 5\text{mA}$)

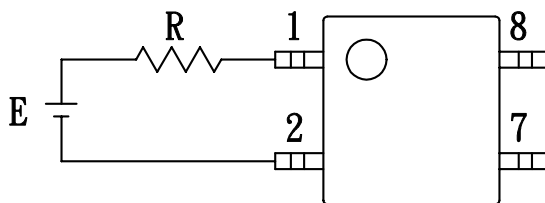

E	R
3.3V	Approx. 240 ohm
5V	Approx. 540 ohm
12V	Approx. 1.8K ohm
15V	Approx. 2.4K ohm
24V	Approx. 4K ohm

- (1) LED forward current must be more than 5mA, at E min.
- (2) LED forward current must be less than 50mA, at E max.

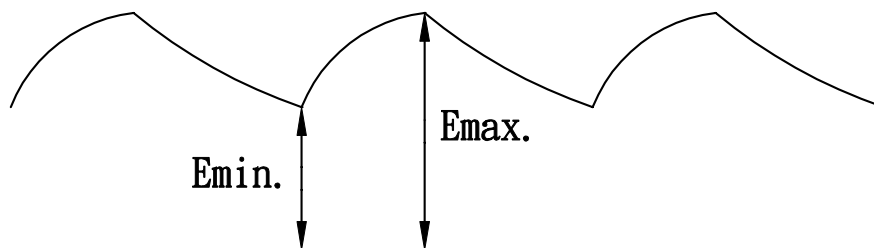

PRODUCT SPECIFICATION



COSMO
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:
KAQW210TSB

SHEET 7 OF 10

USING METHODS

Regulate the spike voltage generated on the inductive load as follows

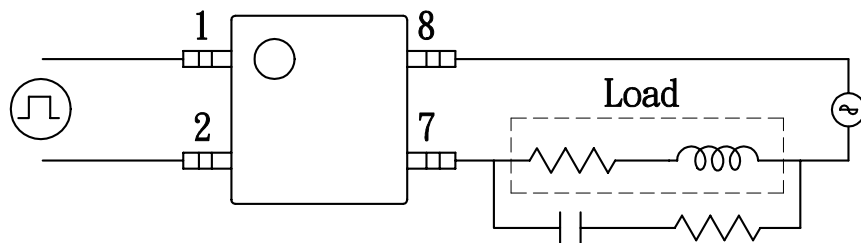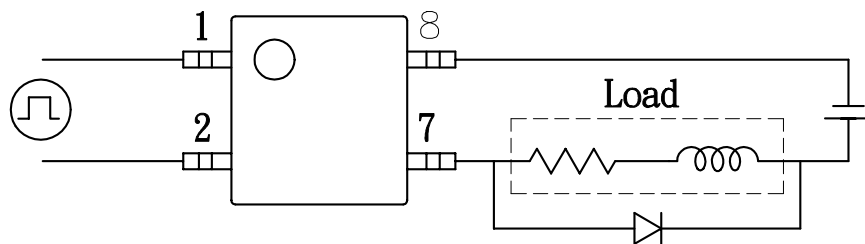

R-C Snubber

PRODUCT SPECIFICATION

COSMO ELECTRONICS CO., LTD.	PHOTO MOS RELAYS: KAQW210TSB	SHEET 8 OF 10
---------------------------------------	--	----------------------

• Absolute Maximum Ratings

(Ta=25°C)


	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	± 50	mA
	Peak forward current	I_{FM}	± 1	A
	Power dissipation	P_D	70	mW
Output	Collector-emitter voltage	V_{CE0}	60	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
	Total power dissipation	P_{tot}	200	mW
	Isolation voltage 1 minute	V_{iso}	3750	V _{rms}
	Operating temperature	T_{opr}	-30 to +100	°C
	Storage temperature	T_{stg}	-55 to +125	°C
	Soldering temperature 10 second	T_{sol}	260	°C

• Electro-optical Characteristics

(Ta=25°C)

	Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F	$I_F = \pm 20\text{mA}$	-	1.2	1.4	V
	Peak forward voltage	V_{FM}	$I_{FM} = \pm 0.5\text{A}$	-	-	3.5	V
	Terminal capacitance	C_t	$V=0, f=1\text{kHz}$	-	30	-	pF
Output	Collector dark current	I_{CBO}	$V_{CE} = 20\text{V}, I_F = 0$	-	-	0.1	µA
Transfer characteristics	Current transfer ratio	CTR	$I_F = \pm 1\text{mA}, V_{CE} = 5\text{V}$	30	100	-	%
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F = \pm 20\text{mA}, I_C = 1\text{mA}$	-	0.1	0.3	V
	Isolation resistance	R_{iso}	DC500V	5×10^{10}	10^{11}	-	ohm
	Floating capacitance	C_f	$V=0, f=1\text{MHz}$	-	0.6	1.0	pF
	Cut-off frequency	f_c	$V_{CC} = 5\text{V}, I_C = 2\text{mA}, R_L = 100\text{ohm}$	-	80	-	kHz
	Response time (Rise)	t_r	$V_{CC} = 2\text{V}, I_C = 2\text{mA}, R_L = 100\text{ohm}$	-	5	20	µs
	Response time (Fall)	t_f	$V_{CC} = 2\text{V}, I_C = 2\text{mA}, R_L = 100\text{ohm}$	-	4	20	µs

Fig.1 Current Transfer Ratio vs. Forward Current

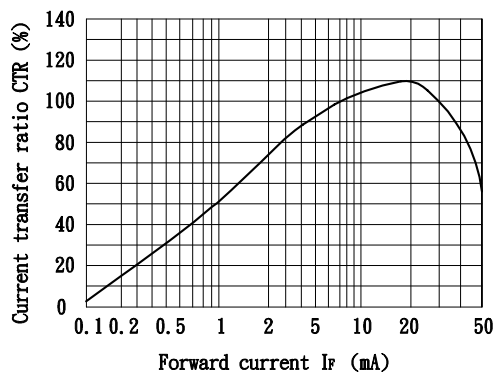

PRODUCT SPECIFICATION

COSMO
ELECTRONICS CO., LTD.

PHOTO MOS RELAYS:
KAQW210TSB

SHEET 9 OF 10

Fig. 2 Collector Power Dissipation vs. Ambient Temperature

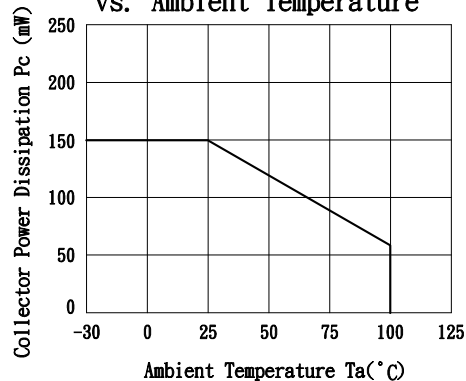


Fig. 3 Collector Dark Current vs. Ambient Temperature

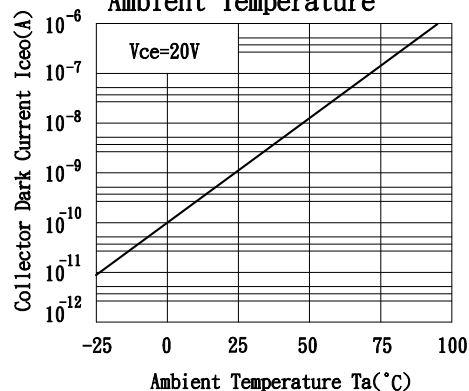


Fig. 4 Forward Current vs. Ambient Temperature

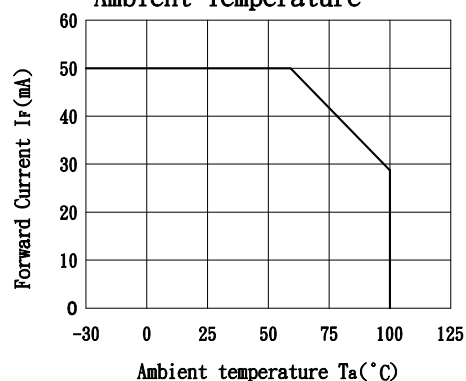


Fig. 5 Forward Current vs. Forward Voltage

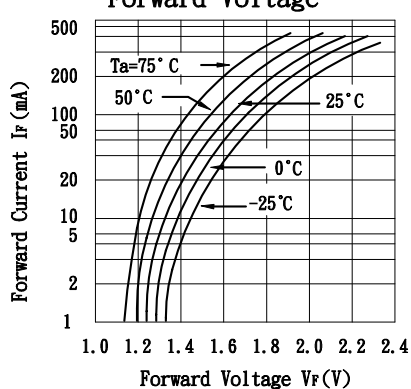


Fig. 6 Collector Current vs. Collector-emitter Voltage


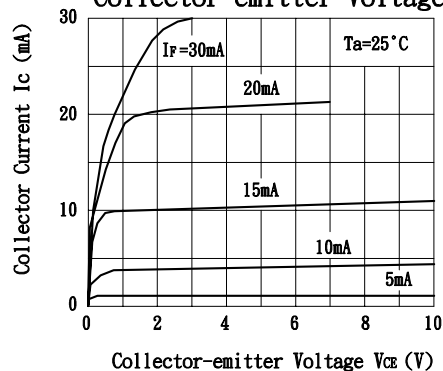


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

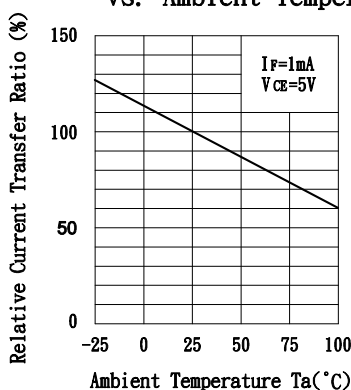

PRODUCT SPECIFICATION

<p>COSMO ELECTRONICS CO., LTD.</p>	<p>PHOTO MOS RELAYS: KAQW210TSB</p>	<p>SHEET 10 OF 10</p>
---	--	-----------------------

Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature

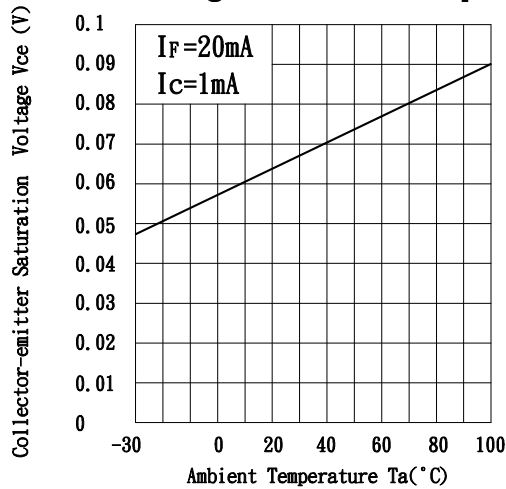


Fig. 9 Collector-emitter Saturation Voltage vs. Forward Current

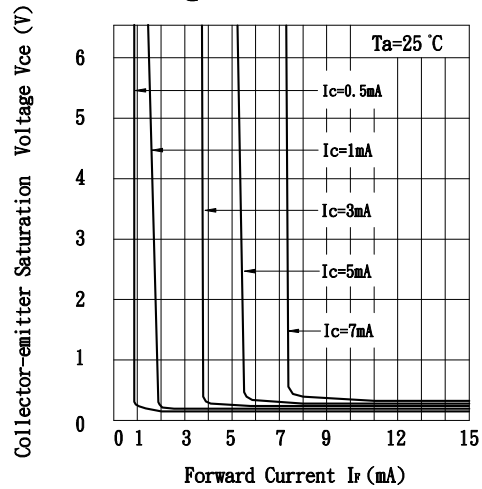


Fig. 10 Response Time vs. Load Resistance

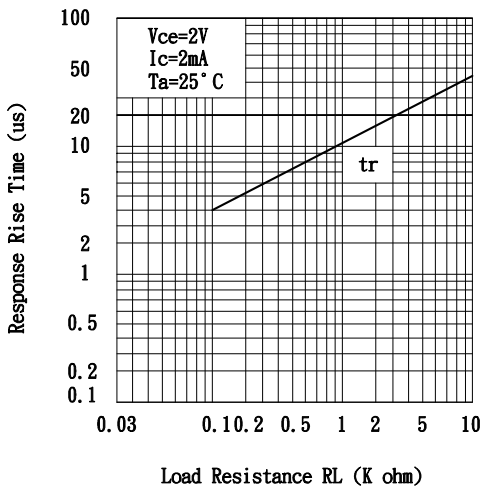


Fig. 11 Response Time vs. Load Resistance

