

## 3-TERMINAL 1A POSITIVE ADJUSTABLE REGULATOR

The KIA317F/FP/PI/S is adjustable 3-terminal positive voltage regulator capable of supplying in excess of 1.5A over a 1.25V to 37V output range. This is exceptionally easy to use and require only two external resistors to set the output voltage. Further, both line and load regulation are better than standard fixed regulators.

### FEATURES


- Adjustable output between 1.25V and 37V
- Guaranteed 1.5A output current
- Line regulation typically 0.001%/V
- Load regulation typically 0.1%
- 80dB ripple rejection (with Cadj)
- Internal thermal overload protection
- Internal short-circuit current limiting
- Output transistor safe-area compensation

### MAXIMUM RATINGS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Input-Output Voltage Differential		$V_{IN}$	40	V
Output Current		$I_{OUT}$	1.5	A
Power Dissipation (No Heatsink)	F	$P_D$	1.3	W
	FP		2.0	
	PI		2.0	
	S (Note)		1.0	
Operating Temperature		$T_{opr}$	-30 85	
Storage Temperature		$T_{stg}$	-65 150	
Lead Temperature		$T_{lead}$	230	

Note) : Package Mounted on FR-4 PCB 36 × 18 × 1.5mm.  
mounting pad for the GND Lead min. 6cm<sup>2</sup>.

### BLOCK DIAGRAM

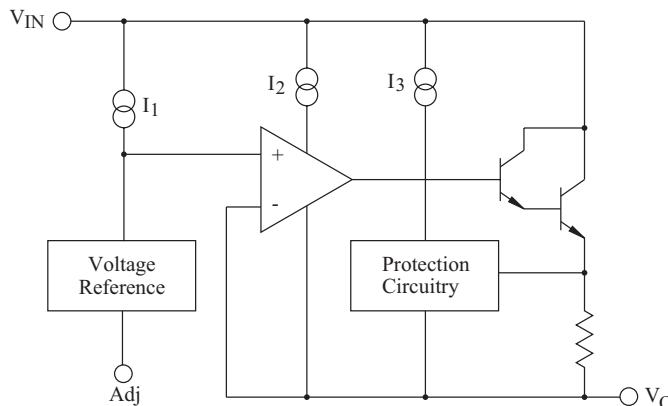

# KIA317F/FP/PI/S

## ELECTRICAL CHARACTERISTICS (Ta=25 °C)


(V<sub>I</sub>-V<sub>O</sub>=5V, I<sub>O</sub>=0.5A, 0 ≤ T<sub>j</sub> ≤ 125 °C, I<sub>MAX</sub>=1.5A, unless otherwise specified.)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Line Regulation	V <sub>O</sub> (Line)	Ta=25 °C, I <sub>O</sub> =10mA	3V	Vin-Vout	40V	% / V
		Ta=0 °C, 125 °C, I <sub>O</sub> =10mA				
Load Regulation	V <sub>O</sub> (Load)	Ta=25 °C	10mA	Iout	I <sub>MAX</sub>	%
		Ta=0 °C, 125 °C				
Adjustable Pin Current	I <sub>Adj</sub>		-	50	100	μA
Adjustable Pin Current Change	I <sub>Adj</sub>	10mA I <sub>O</sub> I <sub>MAX</sub> , 3V Vin-Vout 40V	-	0.2	5	μA
Reference Voltage	V <sub>ref</sub>	10mA I <sub>O</sub> I <sub>MAX</sub> , 3V Vin-Vout 40V, P P <sub>MAX</sub>	1.20	1.25	1.30	V
Temperature Stability	ST <sub>T</sub>	T <sub>Min</sub> T <sub>j</sub> T <sub>MAX</sub>	-	1	-	%
Minimum Load Current to Maintain Regulation	I <sub>O(MIN)</sub>	(Vin-Vout)=40V	-	3.5	10	mA
Current Limit	I <sub>O(MAX)</sub>	(Vin-Vout) 15V, P P <sub>MAX</sub>	1.5	2.2	3.4	A
		(Vin-Vout) 40V, P P <sub>MAX</sub> , Ta=25 °C	0.15	0.4	-	A
Output Noise Voltage	V <sub>NO</sub>	Ta=25 °C, 10Hz ≤ f ≤ 10kHz, % of Vout	-	0.0003	-	%
Ripple Rejection Ratio	RR	V <sub>O</sub> =10V, f=120Hz	-	65	-	dB
		C <sub>Adj</sub> =10μF	66	80	-	
Long Term Stability	ST	Ta=25 °C for end point measurement, 1000 Hr	-	0.3	1	%

Note : Load and line regulation are specified at constant junction temperature.

Change in V<sub>O</sub> due to heating effects must be taken into account separately. Pulse testing with low duty is used.

## TYPICAL APPLICATION (PROGRAMMABLE REGULATOR)

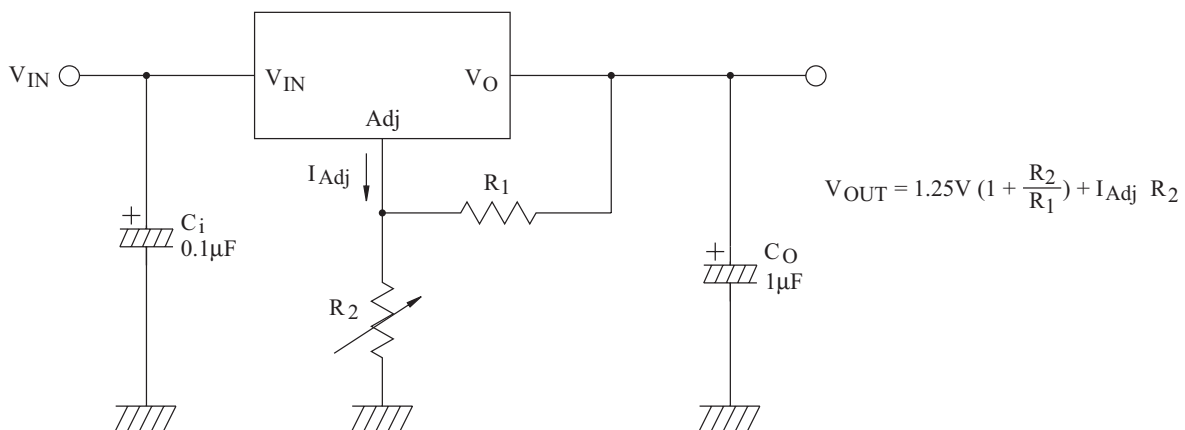


C<sub>i</sub> is required when regulator is located an appreciable distance from power supply filter.

C<sub>o</sub> is not needed for stability, however, in the range of 1μF to 100μF of aluminum or tantalum electrolytic are commonly used to provide improved output impedance and rejection of transients.


Since I<sub>Adj</sub> is controlled to less than 100μA, the error associated with this term is negligible in most applications.

# KIA317F/FP/PI/S


Load Regulation

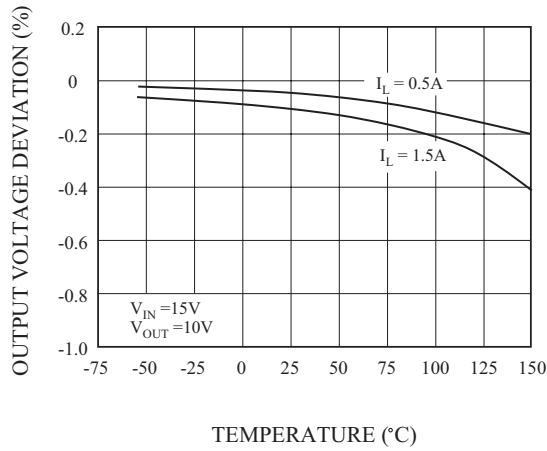


Current Limit

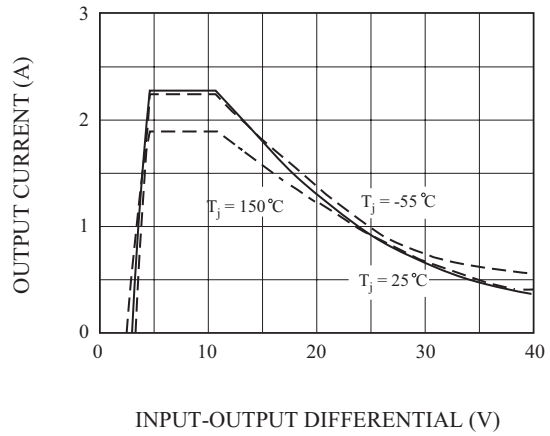


Adjustment Current

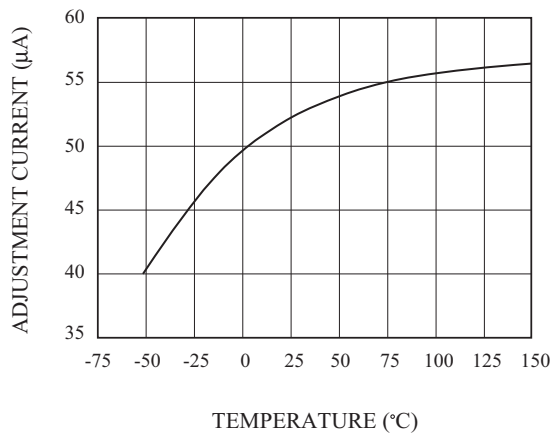


Dropout Voltage

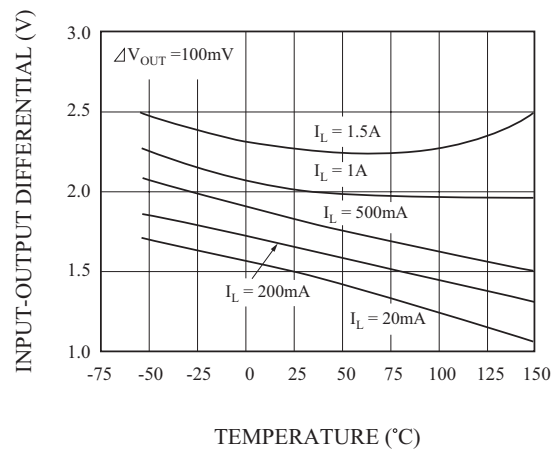


Temperature Stability

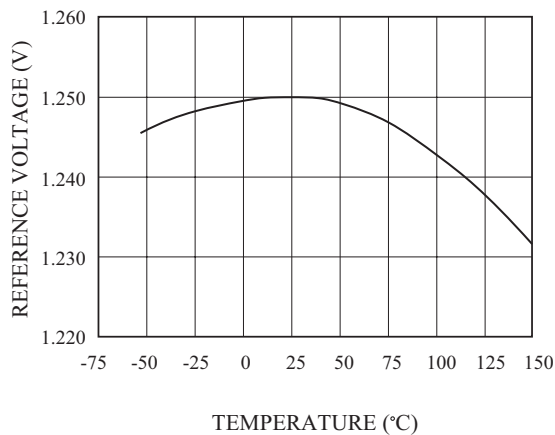


Minimum Operating Current

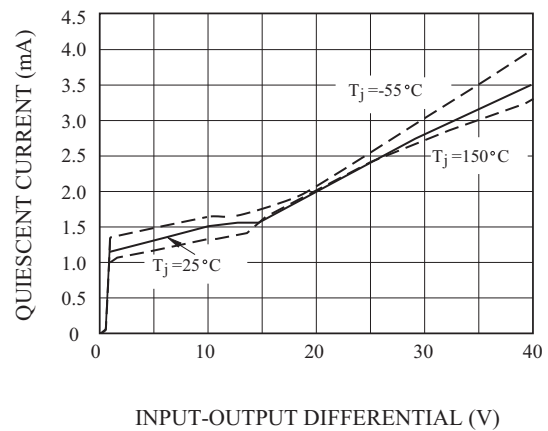


Ripple Rejection

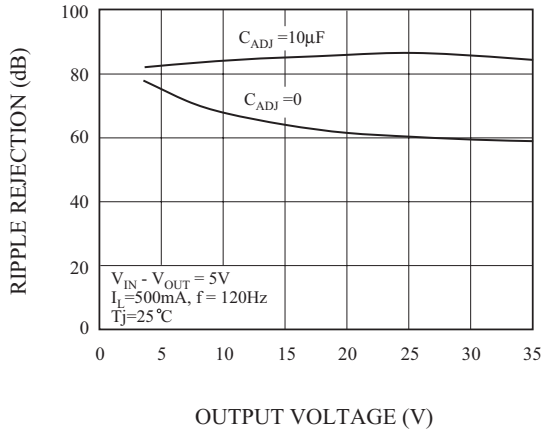


Ripple Rejection

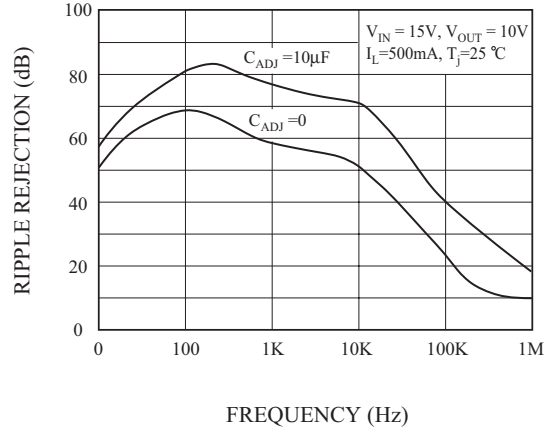


Ripple Rejection

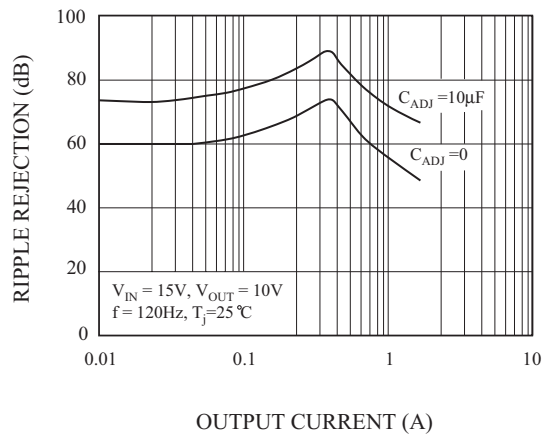


Output Impedance

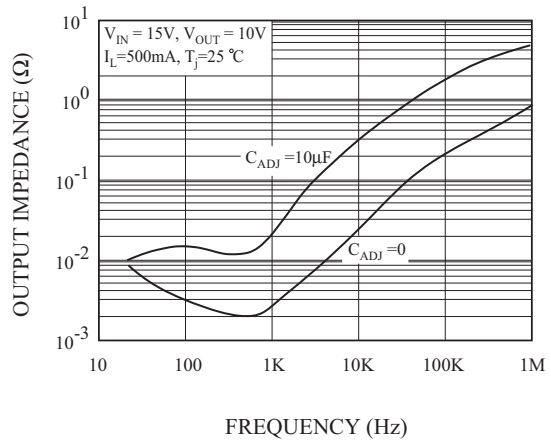

Line Transient Response

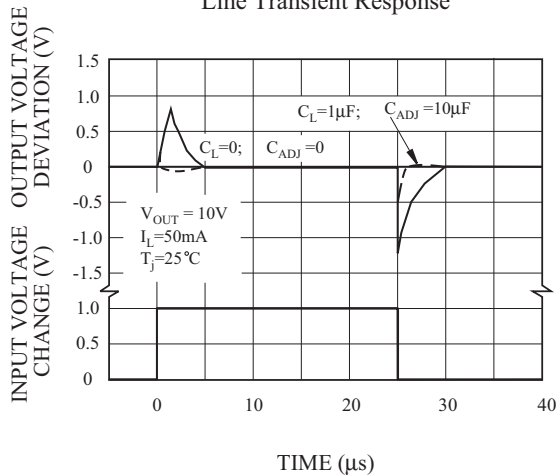


Line Transient Response

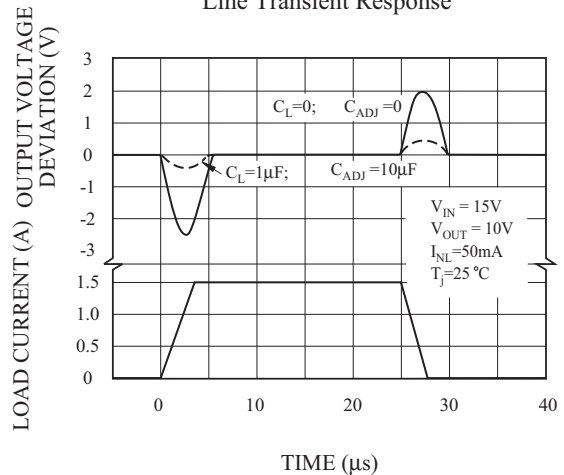


# KIA317F/FP/PI/S


Power Dissipation-2 (DPAK)

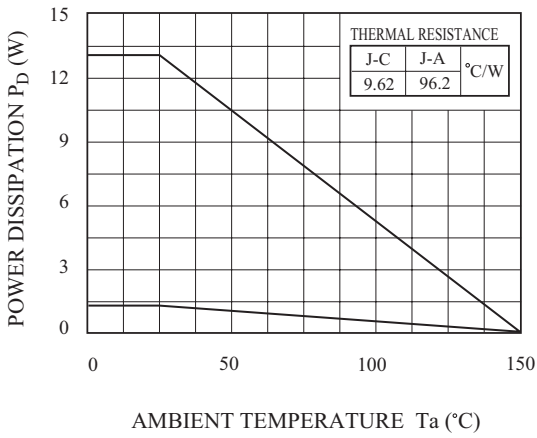


Power Dissipation-3 (D<sup>2</sup>PAK)

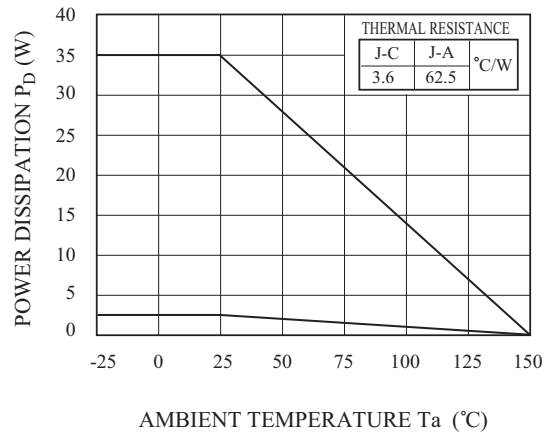

Power Dissipation-1 (TO-220IS)

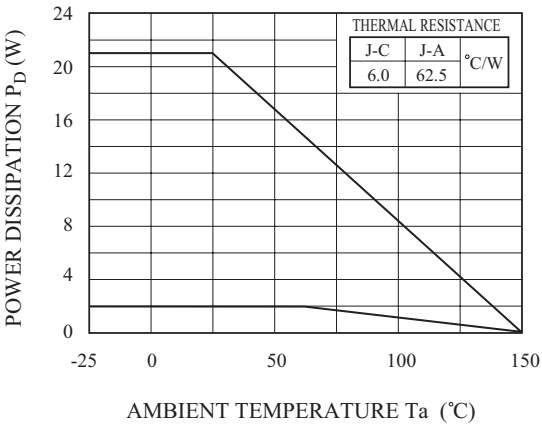

Power Dissipation-4 (SOT-223)

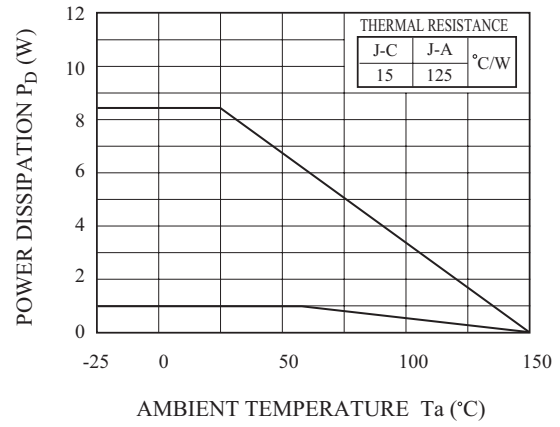

# KIA317F/FP/PI/S

