

---

**LOW DROPOUT  
VOLTAGE REGULATOR  
RN5RT SERIES**

**APPLICATION MANUAL**

---

NO.EA-038-0006



## LOW DROPOUT VOLTAGE REGULATOR

### RN5RT SERIES

#### OUTLINE

The RN5RT Series are voltage regulator ICs with high output voltage accuracy and low supply current developed through the use of a CMOS process. Each of these voltage regulator ICs consists of a voltage reference unit, an error amplifier, output voltage setting resistors and a current limit circuit.

The output voltage of these ICs is fixed with high accuracy.

The built-in Driver Transistor of low ON Resistance permits developing of low dropout CMOS type regulator as RN5RT Series.

Even if V<sub>OUT</sub> is shorted to GND, the current limit circuit protects the ICs from destruction.

Furthermore, these ICs have a chip enable function, so that the supply current on standby can be minimized.

Since the package for these ICs is the SOT-23-5 (Mini-mold) package, high density mounting of the ICs on boards is possible.

#### FEATURES


- Ultra-Low Supply Current.....TYP. 4µA (except ICEL)
- Standby Mode.....TYP. 0.1µA
- Low Dropout Voltage.....TYP. 0.3V (I<sub>OUT</sub>=60mA, RN5RT30A)
- Low Temperature-Drift Coefficient of Output Voltage.....TYP. ±100ppm/°C
- Excellent Line Regulation.....TYP. 0.15%/V
- Output Voltage.....Stepwise setting with a step of 0.1V in the range of 2.0V to 6.0V is possible (refer to Selection Guide).
- High Accuracy Output Voltage.....±2.0%
- Built-in Current Limit Circuits .....TYP. 30mA
- Small Package.....SOT-23-5 (Mini-mold)

#### APPLICATIONS

- Power source for battery-powered equipment.
- Power source for cellular phones, cameras, VCRs, camcorders, hand-held audio instruments and hand-held communication equipment.
- Power source for domestic appliances.



## BLOCK DIAGRAM

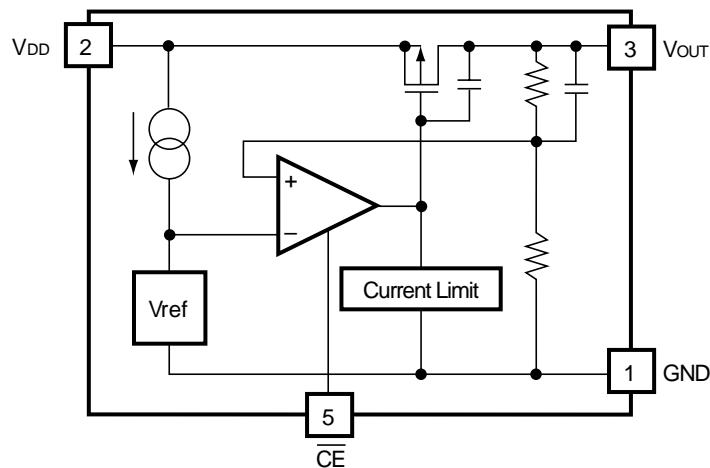

## SELECTION GUIDE


The output voltage, the packing type, and the taping type for the ICs can be selected at the user's request. These selections can be made by designating the part number as shown below:

RN5RT<sub>a</sub><sub>b</sub><sub>c</sub><sub>d</sub> ← Part Number  
 ↑ ↑↑ ↑  
 a b c d

Code	Contents
a	Setting Output Voltage (VOUT) : Stepwise setting with a step of 0.1V in the range of 2.0V to 6.0V is possible.
b	A
c	Designation of Packing Type : A : Taping C : Antistatic bag (for Samples only)
d	Designation of Taping Type : Ex. TR, TL (refer to Taping Specifications ; TR type is the standard direction.)

## PIN CONFIGURATION

• SOT-23-5



## PIN DESCRIPTION

Pin No.	Symbol	Description
1	GND	Ground Pin
2	VDD	Input Pin
3	VOUT	Output Pin
4	NC	No Connection
5	CE	Chip Enable Pin

## ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Ratings	Unit
VIN	Input Voltage	9	V
VCE	Input Voltage ( $\overline{CE}$ Pin)	-0.3 to VIN +0.3	V
VOUT	Output Voltage	-0.3 to VIN +0.3	V
IOUT	Output Current	150	mA
Pd	Power Dissipation	150	mW
Topt	Operating Temperature	-40 to +85	°C
Tstg	Storage Temperature	-55 to +125	°C
Tsolder	Lead Temperature (Soldering)	260°C, 10s	

### ABSOLUTE MAXIMUM RATINGS

Absolute Maximum ratings are threshold limit values that must not be exceeded even for an instant under any conditions. Moreover, such values for any two items must not be reached simultaneously. Operation above these absolute maximum ratings may cause degradation or permanent damage to the device. These are stress ratings only and do not necessarily imply functional operation below these limits.

## ELECTRICAL CHARACTERISTICS

- RN5RT30A

Topt=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
VOUT	Output Voltage	VIN=4.0V, IOUT=10mA	2.940	3.000	3.060	V
IOUT	Output Current	VIN=4.0V	40	60		mA
$\frac{\Delta V_{\text{OUT}}}{\Delta I_{\text{OUT}}}$	Load Regulation	VIN=4.0V 1mA ≤ IOUT ≤ 60mA		40	80	mV
VDIF	Dropout Voltage	IOUT=60mA		0.3	0.5	V
ISS	Supply Current	VIN=4.0V (except ICEL)		4.0	10	µA
Istandby	Supply Current (Standby)	VIN=VCE=4.0V		0.1	1.0	µA
$\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}}}$	Line Regulation	IOUT=30mA VOUT+0.5V ≤ VIN ≤ 8V	0	0.15	0.3	%/V
VIN	Input Voltage				8	V
$\frac{\Delta V_{\text{OUT}}}{\Delta T_{\text{Opt}}}$	Output Voltage Temperature Coefficient	IOUT=10mA -40°C ≤ Topt ≤ 85°C		±100		ppm/°C
Ilim	Short Current Limit	VOUT=0V		30		mA
VCEH	$\overline{CE}$ Input Voltage "H"		1.5			V
VCEL	$\overline{CE}$ Input Voltage "L"				0.25	V
ICEH	$\overline{CE}$ Input Current "H"	VCE=VIN		0	0.1	µA
ICEL	$\overline{CE}$ Input Current "L"	VCE=0V	-4.0	-2.0	-0.1	µA

## • RN5RT40A

Topt=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
VOUT	Output Voltage	VIN=5.0V, IOUT=10mA	3.920	4.000	4.080	V
IOUT	Output Current	VIN=5.0V	50	80		mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation	VIN=5.0V 1mA ≤ IOUT ≤ 80mA		40	80	mV
VDIF	Dropout Voltage	IOUT=80mA		0.3	0.5	V
Iss	Supply Current	VIN=5.0V (expect ICEL)		4	10	µA
Istandby	Supply Current (Standby)	VIN=VCE=5.0V		0.1	1.0	µA
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	IOUT=30mA VOUT+0.5V ≤ VIN ≤ 8V		0.15	0.3	%/V
VIN	Input Voltage				8	V
$\frac{\Delta V_{OUT}}{\Delta T_{Opt}}$	Output Voltage Temperature Coefficient	IOUT=10mA -40°C ≤ Topt ≤ 85°C		±100		ppm/°C
Ilim	Short Current Limit	VOUT=0V		30		mA
VCEH	$\overline{CE}$ Input Voltage "H"		1.5			V
VCEL	$\overline{CE}$ Input Voltage "L"				0.25	V
ICEH	$\overline{CE}$ Input Current "H"	VCE=VIN		0	0.1	µA
ICEL	$\overline{CE}$ Input Current "L"	VCE=0V	-4.0	-2.0	-0.1	µA

## • RN5RT50A

Topt=25°C

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
VOUT	Output Voltage	VIN=6.0V, IOUT=10mA	4.900	5.000	5.100	V
IOUT	Output Current	VIN=6.0V	65	100		mA
$\frac{\Delta V_{\text{OUT}}}{\Delta I_{\text{OUT}}}$	Load Regulation	VIN=6.0V 1mA ≤ IOUT ≤ 100mA		40	80	mV
VDIF	Dropout Voltage	IOUT=100mA		0.3	0.5	V
ISS	Supply Current	VIN=6.0V (except ICEL)		4	10	µA
Istandby	Supply Current (Standby)	VIN=VCE=6.0V		0.1	1.0	µA
$\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}}}$	Line Regulation	IOUT=30mA VOUT+0.5V ≤ VIN ≤ 8V		0.15	0.3	%/V
VIN	Input Voltage				8	V
$\frac{\Delta V_{\text{OUT}}}{\Delta T_{\text{Opt}}}$	Output Voltage Temperature Coefficient	IOUT=10mA -40°C ≤ Topt ≤ 85°C		±100		ppm/°C
Ilim	Short Current Limit	VOUT=0V		30		mA
VCEH	$\overline{CE}$ Input Voltage "H"		1.5			V
VCEL	$\overline{CE}$ Input Voltage "L"				0.25	V
ICEH	$\overline{CE}$ Input Current "H"	VCE=VIN		0	0.1	µA
ICEL	$\overline{CE}$ Input Current "L"	VCE=0V	-4.0	-2.0	-0.1	µA

---




## ELECTRICAL CHARACTERISTICS BY OUTPUT VOLTAGE

Part Number	Output Voltage				Output Current				Load Regulation			Dropout Voltage			Supply Current		
	VOUT (V)				IOUT (mA)				ΔVOUT/ΔIOUT (mA)			VDIF (V)			Iss (μA)		
	Conditions	MIN.	TYP.	MAX.	Conditions	MIN.	TYP.	Conditions	TYP.	MAX.	Conditions	TYP.	MAX.	Conditions	TYP.	MAX.	
RN5RT20A	VIN-VOUT =1.0V	1.960	2.000	2.040	IOUT =10mA	25	40	VIN-VOUT =1.0V	1mA≤ IOUT ≤40mA	IOUT =40mA	40	80	0.3	0.5	VIN-VOUT =1.0V (expect) ICEL	4.0	10
RN5RT21A		2.058	2.100	2.142													
RN5RT22A		2.156	2.200	2.244													
RN5RT23A		2.254	2.300	2.346													
RN5RT24A		2.352	2.400	2.448													
RN5RT25A		2.450	2.500	2.550													
RN5RT26A		2.548	2.600	2.652													
RN5RT27A		2.646	2.700	2.754													
RN5RT28A		2.744	2.800	2.856													
RN5RT29A		2.842	2.900	2.958													
RN5RT30A	IOUT =10mA	2.940	3.000	3.060													
RN5RT31A		3.038	3.100	3.162													
RN5RT32A		3.136	3.200	3.264													
RN5RT33A		3.234	3.300	3.366													
RN5RT34A		3.332	3.400	3.468													
RN5RT35A		3.430	3.500	3.570													
RN5RT36A		3.528	3.600	3.672													
RN5RT37A		3.626	3.700	3.774													
RN5RT38A		3.724	3.800	3.876													
RN5RT39A		3.822	3.900	3.978													
RN5RT40A		3.920	4.000	4.080													
RN5RT41A		4.018	4.100	4.182													
RN5RT42A		4.116	4.200	4.284													
RN5RT43A		4.214	4.300	4.386													
RN5RT44A		4.312	4.400	4.488													
RN5RT45A		4.410	4.500	4.590													
RN5RT46A		4.508	4.600	4.692													
RN5RT47A		4.606	4.700	4.794													
RN5RT48A		4.704	4.800	4.896													
RN5RT49A		4.802	4.900	4.998													
RN5RT50A		4.900	5.000	5.100													
RN5RT51A		4.998	5.100	5.202													
RN5RT52A		5.096	5.200	5.304													
RN5RT53A		5.194	5.300	5.406													
RN5RT54A		5.292	5.400	5.508													
RN5RT55A		5.390	5.500	5.610													
RN5RT56A		5.488	5.600	5.712													
RN5RT57A		5.586	5.700	5.814													
RN5RT58A		5.684	5.800	5.916													
RN5RT59A		5.782	5.900	6.018													
RN5RT60A		5.880	6.000	6.120													

Topt=25°C

Supply Current (Standby)			Line Regulation			Input Voltage	Output Voltage Temperature Coefficient	Short Current Limit		CE Input Voltage		CE Input Current							
Istandby (µA)			ΔVout/ΔVin (%/V)			Vin (V)	ΔVout/ΔT (ppm/°C)	Ilim (mA)		Vceh (V)	Vcel (V)	Iceh (µA)		IceL (µA)					
Conditions	TYP.	MAX.	Conditions	TYP.	MAX.	MAX.	Conditions	TYP.	Conditions	TYP.	MIN.	MAX.	Conditions	TYP.	MAX.	Conditions	MIN.	TYP.	MAX.
Vin-Vout =1.0V	0.1	1.0	IOUT= 30mA VOUT+ 0.5V ≤VIN ≤8V	0.15	0.3	8	IOUT= 10mA -40°C ≤Topt ≤85°C	±100	VOUT =0V	30	1.5	0.25	Vce= Vin	0	0.1	Vce= 0V	-4.0	-2.0	-0.1




## OPERATION

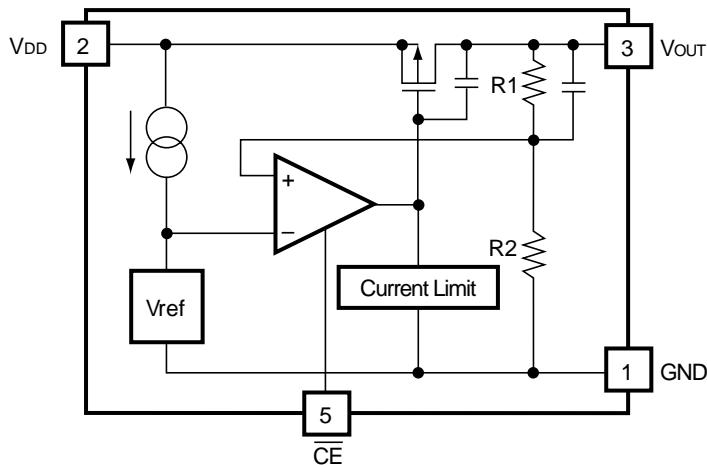

In these ICs, Output Voltage **VOUT** is detected by Feed-back Registers **R1**, **R2**, and the detected Output Voltage is compared with a reference voltage by Error Amplifier, so that a constant voltage is output.




A current limit circuit working for Short Protect and a chip enable circuit for standby function are included.

## TEST CIRCUITS

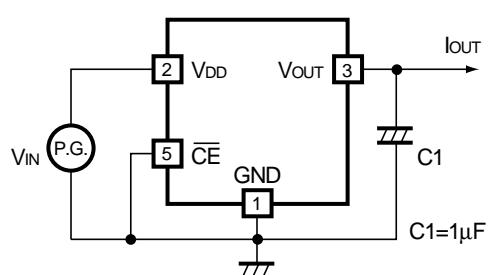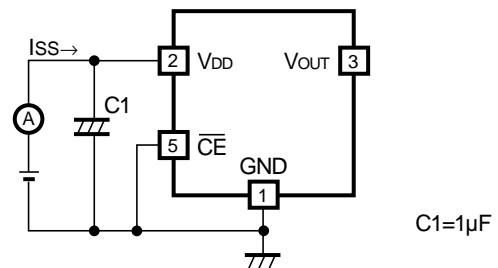
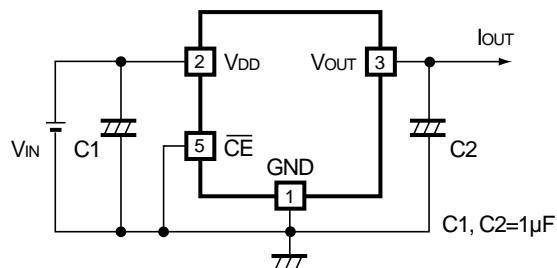






## TYPICAL CHARACTERISTICS

### 1) Output Voltage vs. Output Current

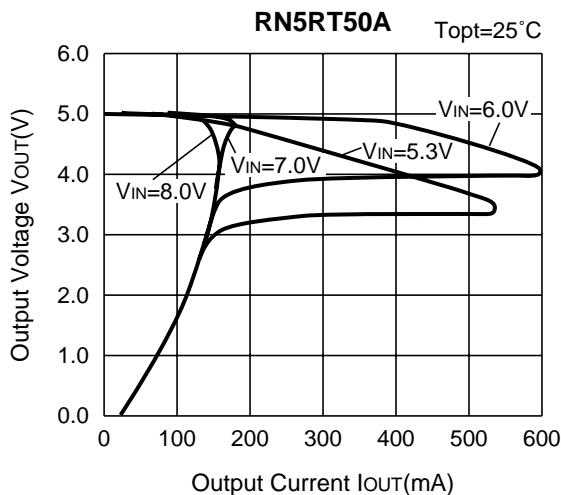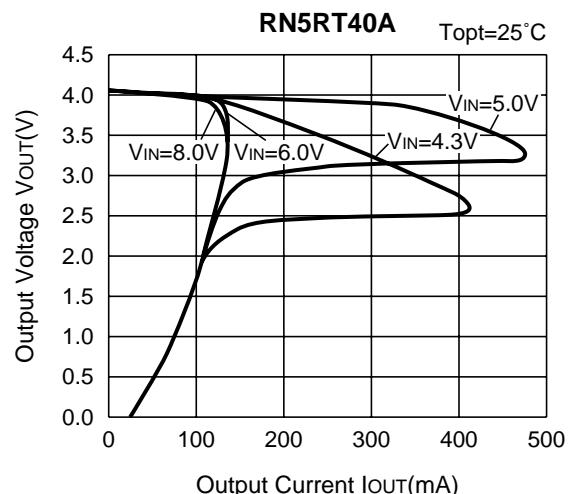
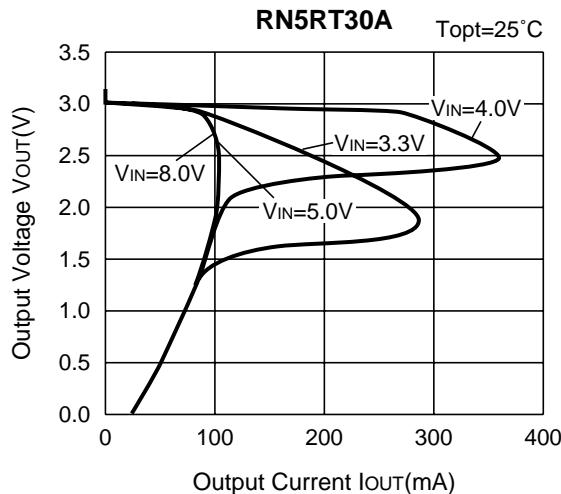



### 2) Output Voltage vs. Input Voltage

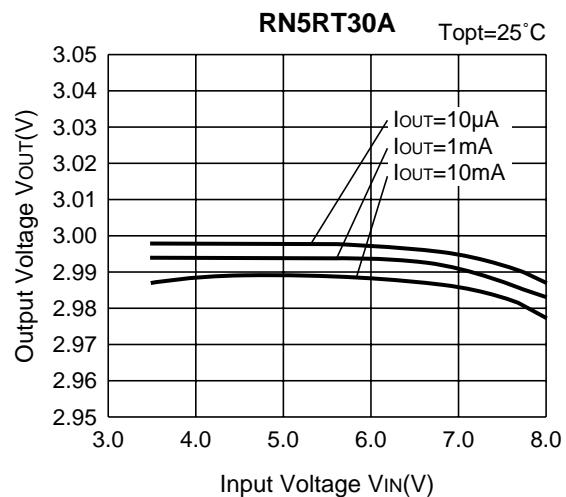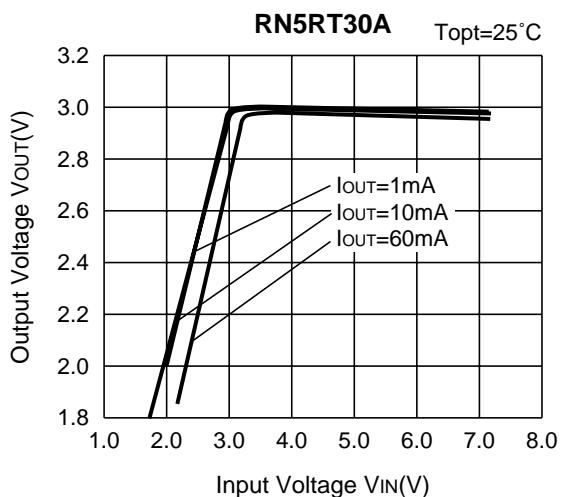

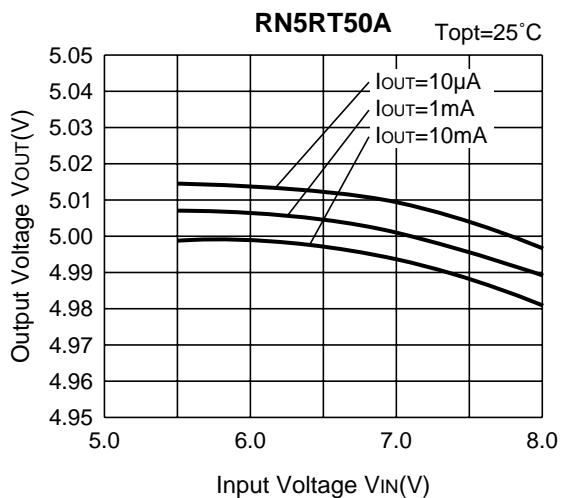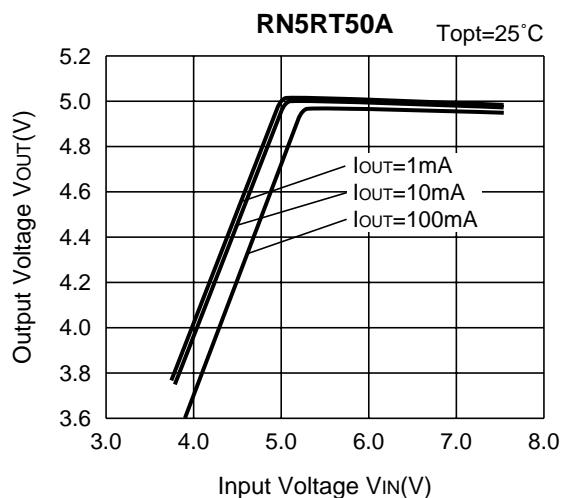
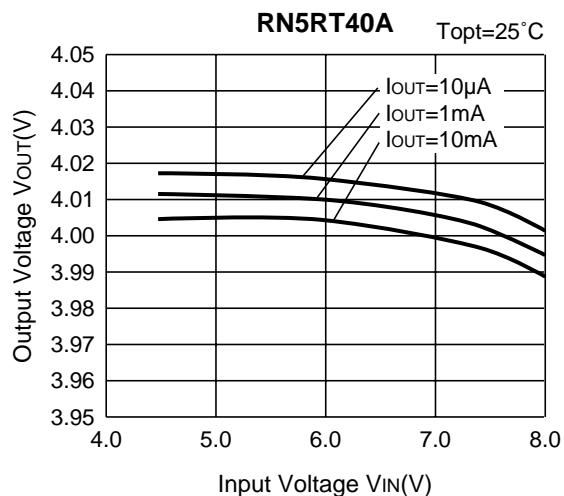
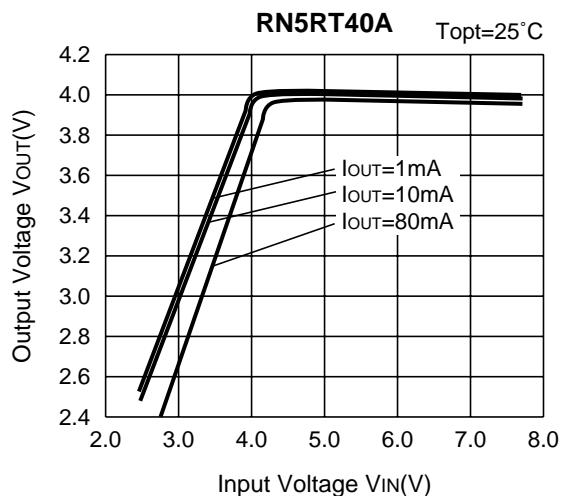







### 3) Dropout Voltage vs. Output Current

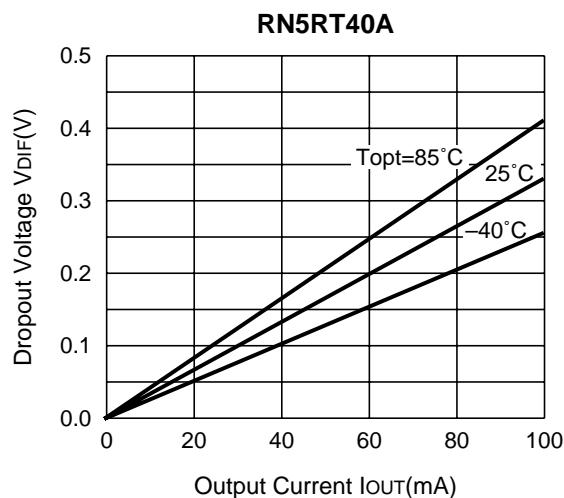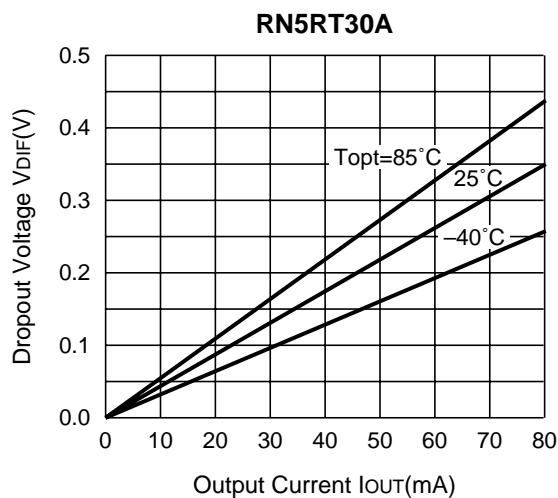


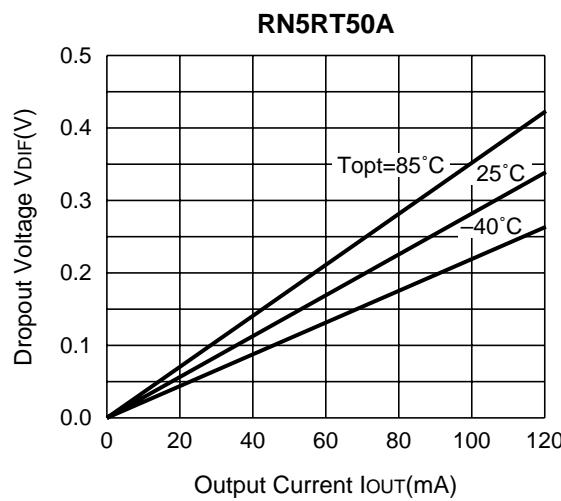


#### 4) Output Voltage vs. Temperature

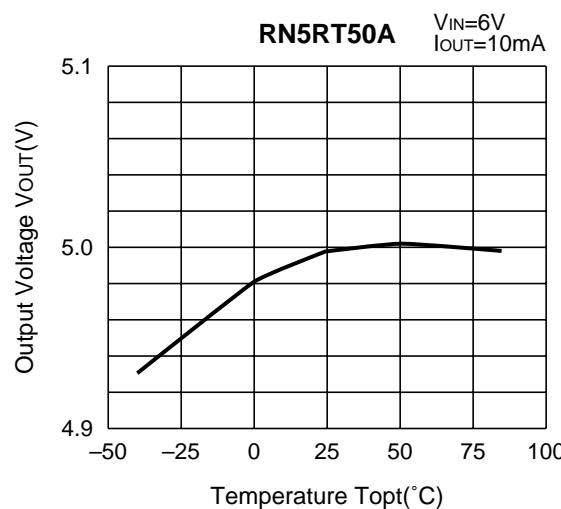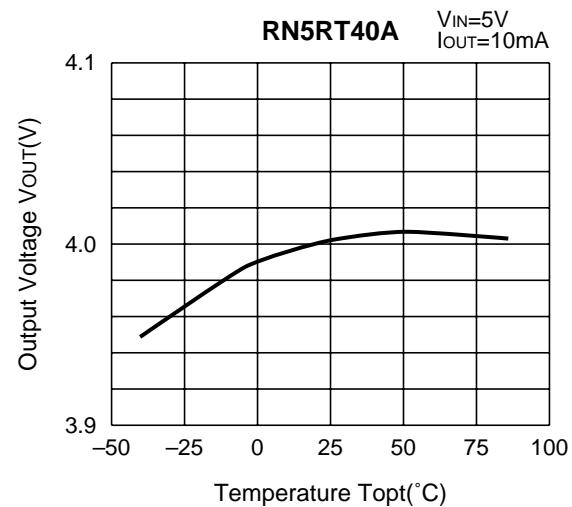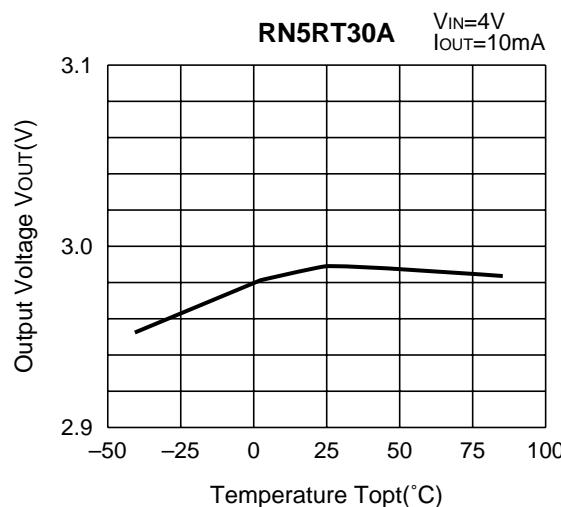

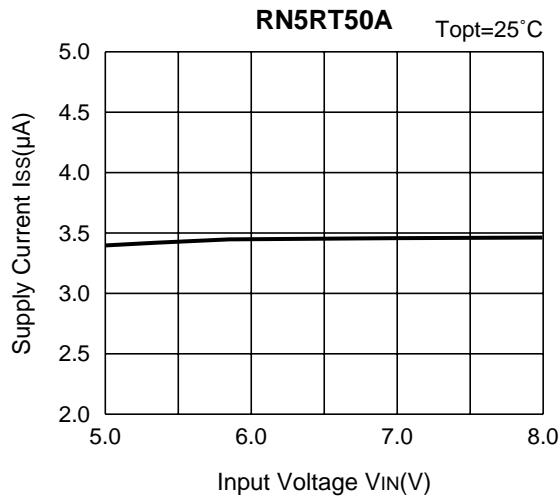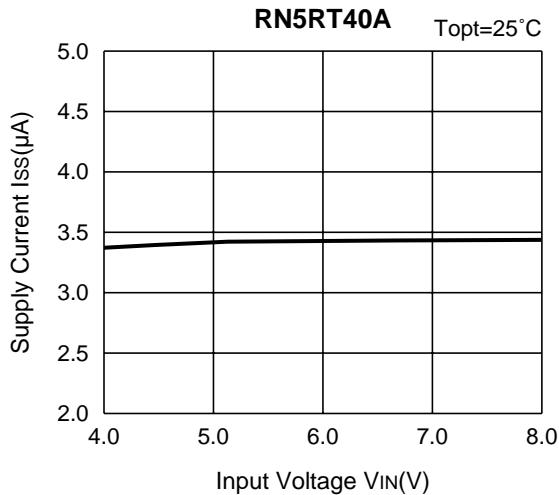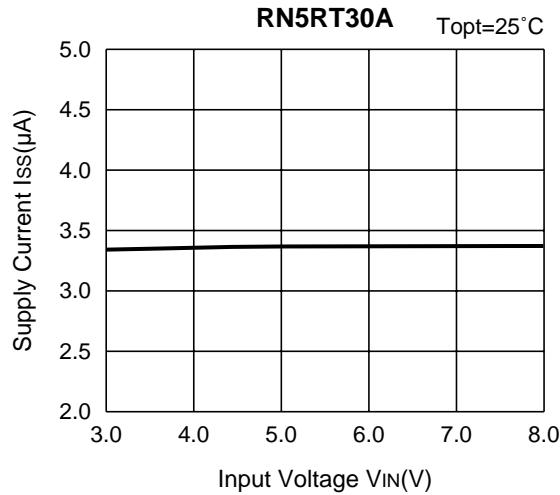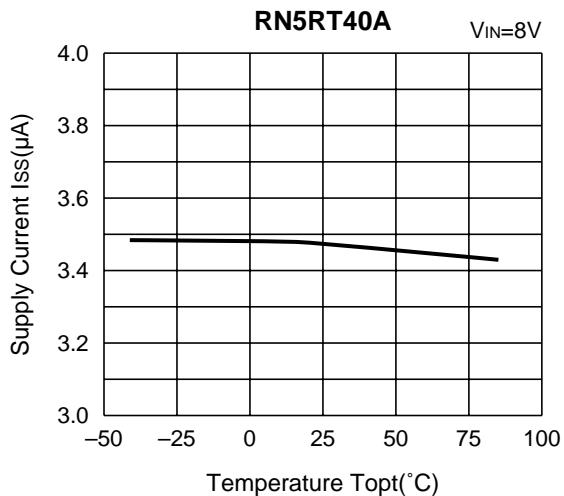
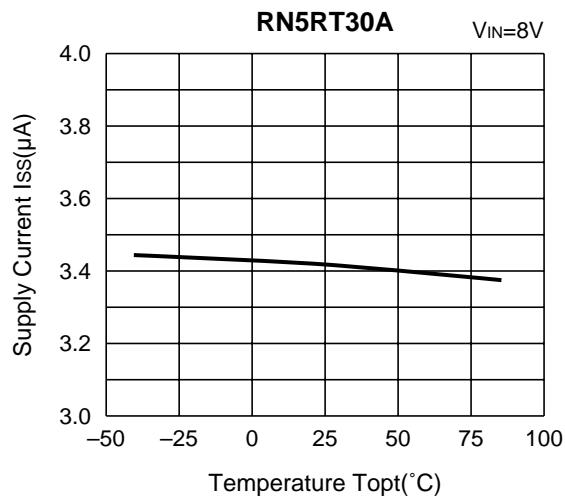
**5) Supply Current vs. Input Voltage****6) Supply Current vs. Temperature**

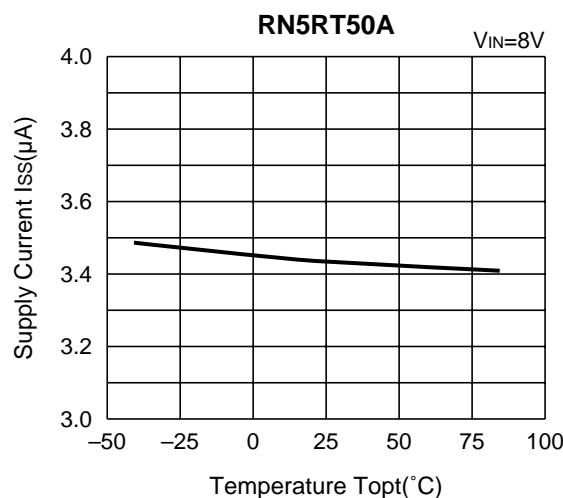


### 7) Dropout Voltage vs. Set Output Voltage

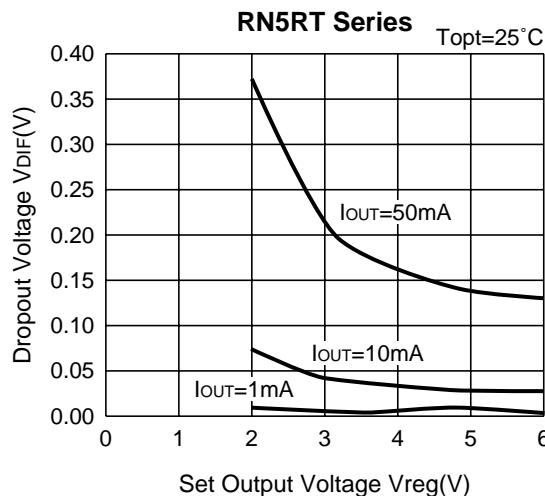

### 8) Line Transient Response

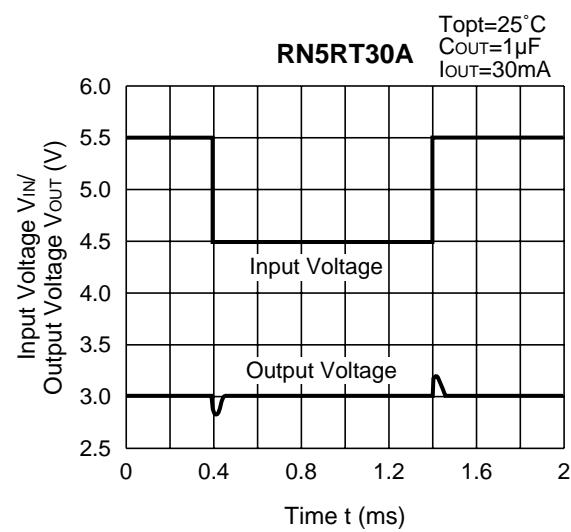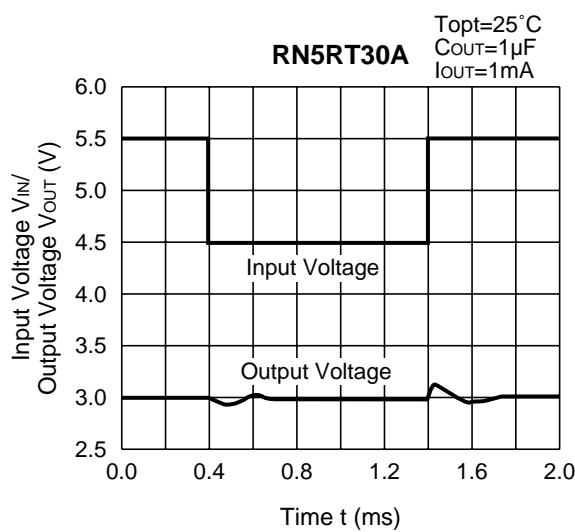

## TYPICAL APPLICATION

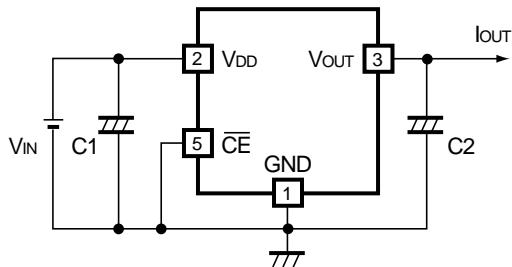

In the RN5RT Series, a constant voltage can be obtained without using Capacitor C1 and C2. However, when the wire connected to  $V_{IN}$  is long, use Capacitor C1. Transient noise of output voltage occurred due to load deviation can be reduced by using Capacitor C2.

Insert Capacitors C1 and C2 with the capacitance of  $0.1\mu F$  to  $2.0\mu F$  between Input/Output Pins and GND Pin with minimum wiring.