

Renesas LSIs

M5M29GB/T320VP-80

33,554,432-BIT (4,194,304-WORD BY 8-BIT / 2,097,152-WORD BY 16-BIT)
CMOS 3.3V-ONLY, BLOCK ERASE FLASH MEMORY

DESCRIPTION

The Mobile FLASH M5M29GB/T320VP are 3.3V-only high speed 33,554,432-bit CMOS boot block Flash Memories with alternating BGO (Back Ground Operation) feature. The BGO feature of the device allows Program or Erase operations to be performed in one bank while the device simultaneously allows Read operations to be performed on the other bank. This BGO feature is suitable for mobile and personal computing, and communication products. The M5M29GB/T320VP are fabricated by CMOS technology for the peripheral circuits and DINOR(Divided bit line NOR) architecture for the memory cells, and are available in 48pin TSOP(I) .


FEATURES

- Organization 2,097,152 word x 16bit
..... 4,194,304 word x 8 bit
- Supply voltage Vcc = 2.7 ~ 3.6V
- Access time 80ns (Vcc=3.0~3.6V)
..... 90ns (Vcc=2.7~3.6V)
- Power Dissipation 72 mW (Max. at 5MHz)
Read 0.33μW (typ.)
(After Automatic Power saving) 0.33μW (typ.)
Program/Erase 126mW (Max.)
Standby 0.33μW (typ.)
- Deep power down mode 0.33μW (typ.)
Auto program for Bank(I) and Bank(II)
Program Time 4ms (typ.)
Program Unit
(Byte Program) 1word/1byte
(Page Program) 128word/256byte
- Auto program for Bank(III) and Bank(IV)
Program Time 4ms (typ.)
Program Unit 128word/256byte
- Auto Erase
Erase time 40 ms (typ.)
Erase Unit
Bank(I) Boot Block 4Kword/8Kbyte x 2
Parameter Block 4Kword/8Kbyte x 6
Main Block 32Kword/64Kbyte x 7
Bank(II) Main Block 32Kword/64Kbyte x 8
Bank(III) Main Block 32Kword/64Kbyte x 24
Bank(IV) Main Block 32Kword/64Kbyte x 24
- Program/Erase cycles 100Kcycles
- Boot Block
M5M29GB320VPBottom Boot
M5M29GT320VPTop Boot
- Other Functions
Soft Ware Command Control
Selective Block Lock
Status Register Read
Alternating Back Ground Program/Erase Operation
Between Bank(I) ,Bank(II),Bank(III) and Bank(IV)
- Package
48-Lead, 12mm x 20mm TSOP (type-I)

APPLICATION

- Code Strage
- Digital Cellular Phone
- Telecommunication
- Mobile Computing Machine
- PDA (Personal Digital Assistance)
- Car Navigation System
- Video Game Machine


PIN CONFIGURATION (TOP VIEW)

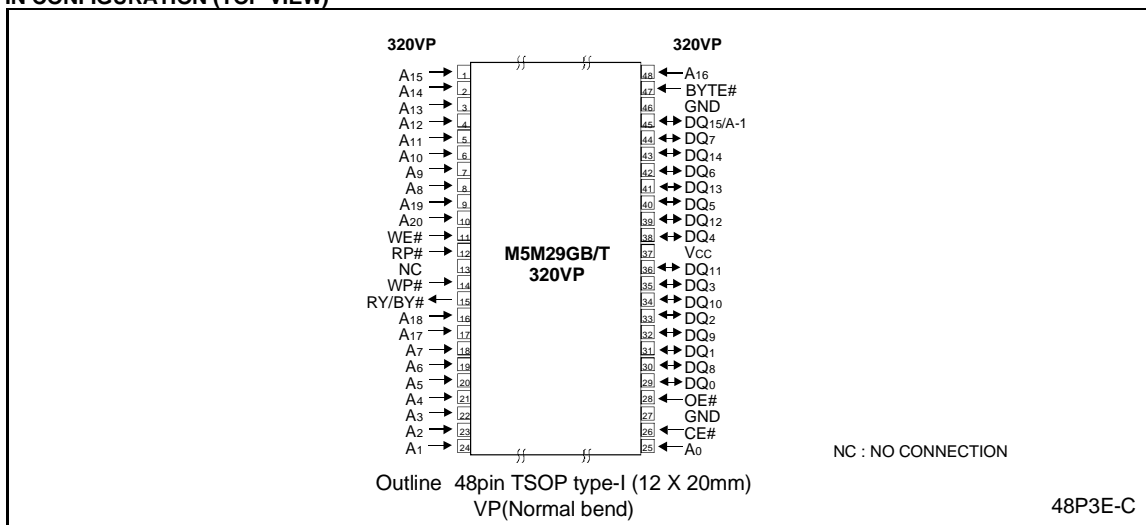


Renesas LSIs

M5M29GB/T320VP-80

33,554,432-BIT (4,194,304-WORD BY 8-BIT / 2,097,152-WORD BY 16-BIT)
CMOS 3.3V-ONLY, BLOCK ERASE FLASH MEMORY

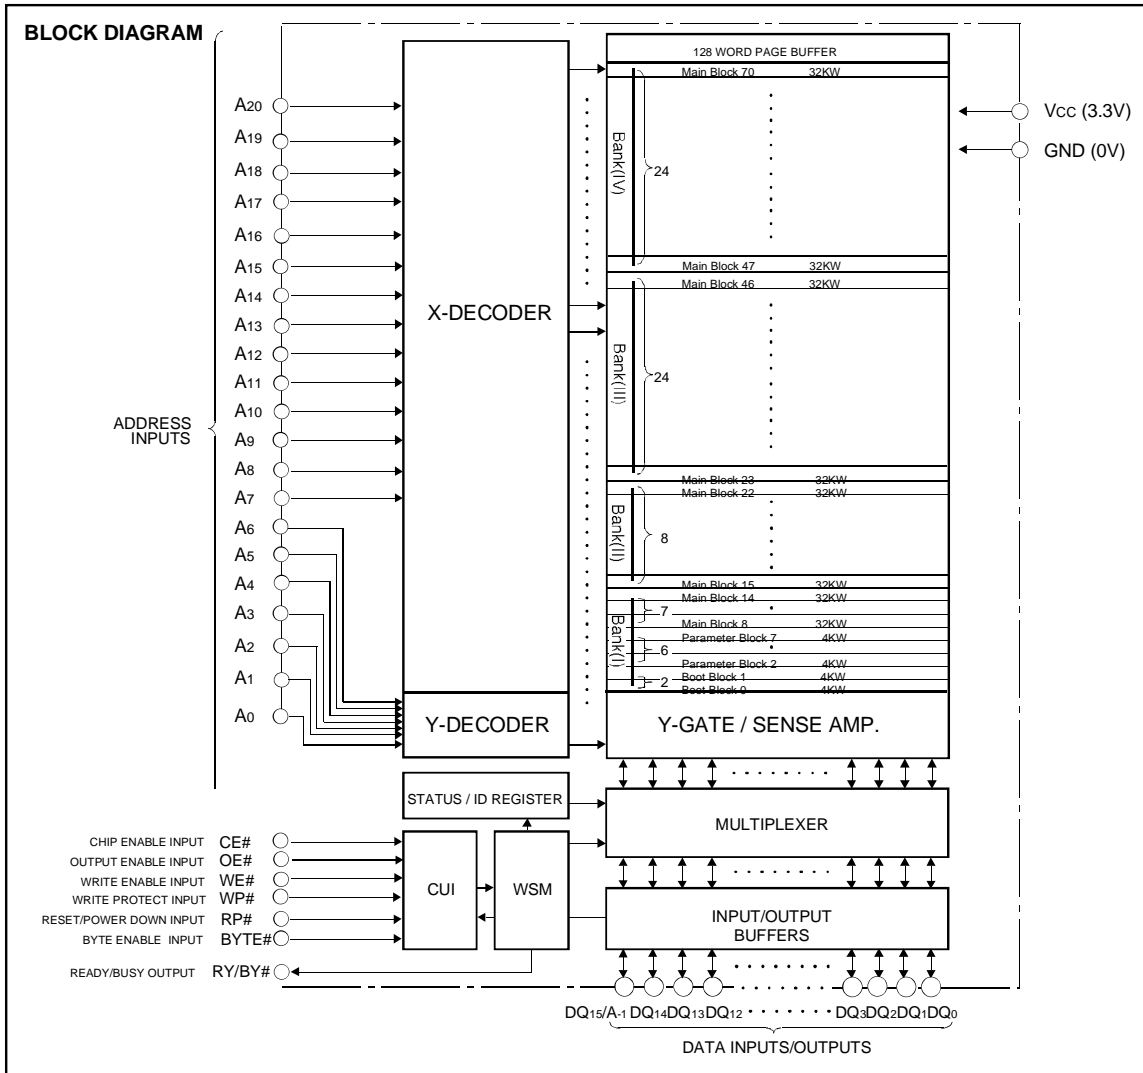

M5M29GB/T320VP (8/16 bit version)

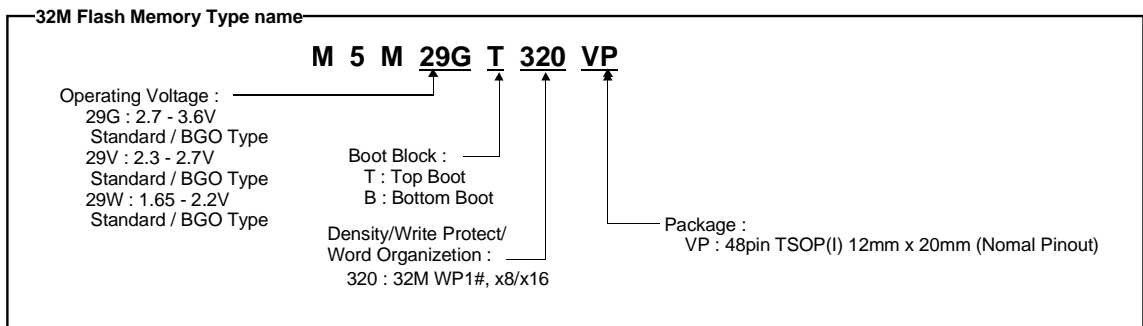

Renesas LSIs

M5M29GB/T320VP-80

33,554,432-BIT (4,194,304-WORD BY 8-BIT / 2,097,152-WORD BY 16-BIT)
CMOS 3.3V-ONLY, BLOCK ERASE FLASH MEMORY

Renesas Technology Corp.

Nippon Bldg.,6-2,Otemachi 2-chome,Chiyoda-ku,Tokyo,100-0004 Japan

Keep safety first in your circuit designs!

- Renesas Technology Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corporation product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corporation or a third party.
- Renesas Technology Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Renesas Technology Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Renesas Technology Corporation by various means, including the Renesas Technology Corporation Semiconductor home page (<http://www.renesas.com>).
- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Renesas Technology Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Renesas Technology Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Renesas Technology Corporation for further details on these materials or the products contained therein.