

### **Chokes for Power Lines**

### **Current-Compensated Ring Core Double Chokes**

Rated voltage 250 Vac Rated current 16 A Rated inductance 1,4 mH

#### Construction

- Current-compensated ring core double choke with ferrite core
- Polycarbonate base plate
- Sector winding
- Insulating sleeves ensure creepage distances and clearances
- Winding wire serves as solder terminal

#### **Features**

- Vertical (upright) version
- Base plate flame-retardant as per UL 94 V-0
- High resonance frequency due to special winding technique and omission of potting
- >1 % stray inductance for symmetrical interference suppression

### **Applications**

- Power supplies
- Charging equipment

#### **Terminals**

■ Tinned copper wire Ø 1,6 mm

### Marking

Manufacturer, ordering code, rated inductance, rated current, rated voltage, graphic symbol






# **Current-Compensated Ring Core Double Chokes**

## Dimensional drawing and pin configuration

**Chokes for Power Lines** 

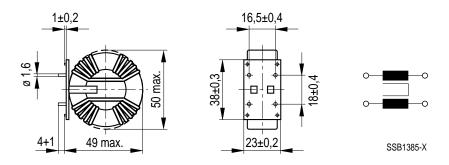

### General technical data

Test voltage V <sub>T</sub>	1500 Vac, 2 s (line/line)	
Rated current I <sub>R</sub>	Referred to 50 Hz and 40 °C ambient temperature	
Inductance tolerance	± 30 %	
Weight	Approx. 80 g	

For further technical data see page 334

## **Characteristics and ordering codes**

I <sub>R</sub> A	L <sub>R</sub> mH	L <sub>S, typ</sub> μΗ	$R_{ ext{typ}}$ m $\Omega$	Ordering code
16	1,4	21	7	B82726-S2163-N1





## **Chokes for Power Lines**

# **Current-Compensated Ring Core Double Chokes**

## Impedance |Z| versus frequency f

(measured with windings in parallel)

