

110-240 V MICRODRIVERS



FEATURES / BENEFITS

- ▲ Energy efficient switch mode power electronics
- ▲ Short and open circuit protected
- ▲ Small compact size
- ▲ Rugged design with terminal cover & cable grip
- ▲ Over-voltage protection
- ▲ Resetting thermal shutdown safety feature
- ▲ Meets lighting approbation requirements (CE & ENEC)

OPERATING CONDITIONS

- ▲ Operating Ambient Temperature: -20°C to +50°C
(-4°F to +113°F)
- ▲ Ambient Storage Temperature: -20°C to +80°C
(-4°F to +176°F)
- ▲ Maximum Case Temperature: <+85°C (185°F)
- ▲ Input Voltage 110-240Vac 50 / 60 Hz
- ▲ V_{out} : MDU9 = 4-32VDC

APPLICATIONS


- ▲ Architectural lighting
- ▲ Cove & cornice lighting
- ▲ Display case lighting
- ▲ Signage
- ▲ Reading lamps
- ▲ Marker & orientation lights
- ▲ Landscape lighting

PART NUMBERS

| Part Number | Description | LED Configuration |
|-------------|------------------|--|
| MDU93570 | MicroDriver 9 SC | 1-9 LEDs of 1-2W in series 1-4 LEDs of 3W in series |


MECHANICAL DRAWING

PHYSICAL ASSEMBLY

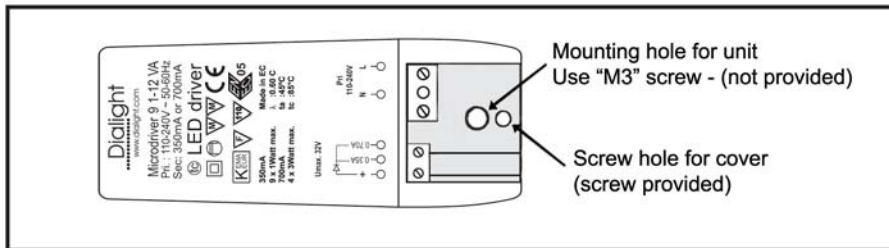



Easily removable cover

MDU935/70 1-9 LEDs (350mA)

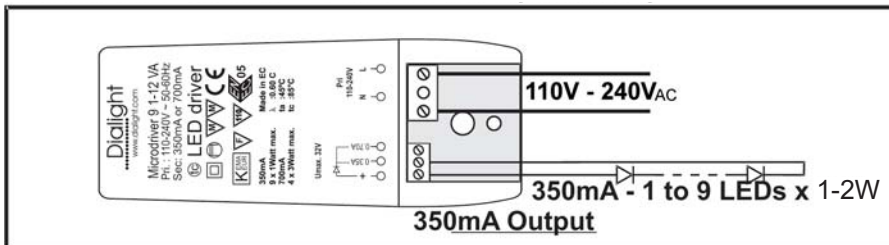

Input and output clamps

MDU935/70 1-5 LEDs (700mA)

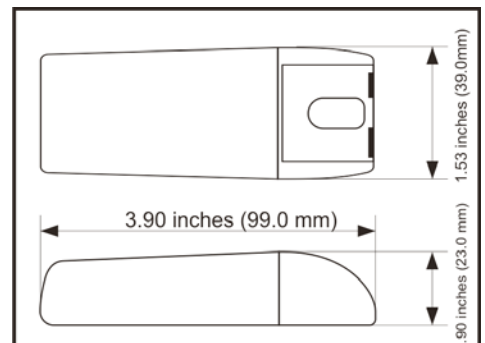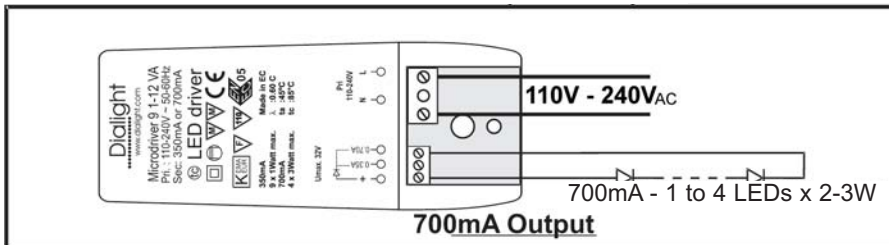

Dialight reserves the right to make changes at any time in order to supply the best product possible.

The most current version of this document will always be available at:

www.dialight.com/Assets/Brochures_And_Catalogs/Illumination/MEDEXLUMMD.pdf

MEDEXLUMMD_D