



# XC6203

## Series

(Large Current) Positive Voltage Regulators



3

◆ CMOS Low Power Consumption (16 $\mu$ A max)

◆ Dropout Voltage : 150mV @ 100mA,  
300mV @ 200mA

◆ Maximum Output Current  
: more than 400mA (3.3V)

◆ Highly Accurate :  $\pm$  2%

◆ SOT-89 / SOT-223 / TO-92 Package


### ■ Applications

- Battery Powered Equipment
- Reference Voltage Sources
- Cameras, Video Cameras
- CD-ROMs, DVDs
- Palmtops
- Portable Audio Video Equipment


### ■ Features

- |  |   |
|--|---|
| Maximum Output Current                     | : 400mA                                     |
| Maximum Operating Voltage                  | : 8V  |
| Output Voltage Range                       | : 1.8V ~ 6.0V<br>(selectable in 0.1V steps) |
| Highly Accurate                            | : $\pm$ 2%                                  |
| Low Power Consumption                      | : TYP 8.0 $\mu$ A                           |
| Output Voltage Temperature Characteristics | : TYP $\pm$ 100ppm/ $^{\circ}$ C            |
| Operational Temperature Range              | : -40 $^{\circ}$ C ~ 85 $^{\circ}$ C        |
| Ultra Small Packages                       | : SOT-89, SOT223, TO-92                     |

### ■ Typical Application Circuit

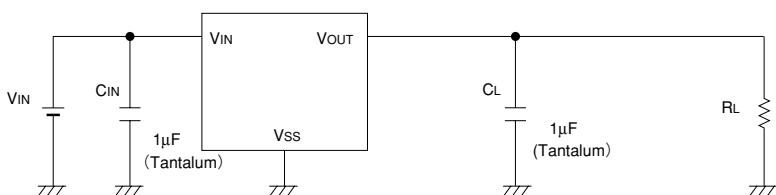


### ■ Typical Performance Characteristic



## XC6203 Series

### ■ Pin Configuration

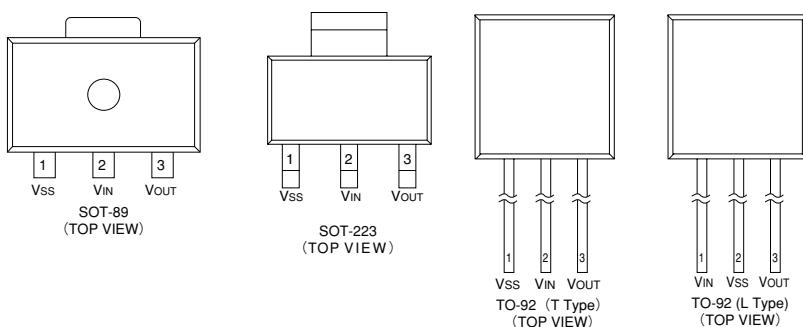

3

### ■ Pin Assignment

PIN NUMBER	PIN NAME		FUNCTION
SOT-89/SOT223/TO-92 (T)	TO-92 (L)	Vss	Ground
1	2	Vin	Power Input
2	1	Vout	Output
3	3		

### ■ Product Classification

#### ● Ordering Information

XC6203 ①②③④⑤⑥


DESIGNATOR	SYMBOL	DESCRIPTION	DESIGNATOR	SYMBOL	DESCRIPTION	
①		Type of Regulator	⑤		Package Type	
	P	Current limiter circuit built-in		S	SOT-89	
	E	No current limiter circuit built-in		F	SOT-223	
②③④	18~ 60 & A	e.g. 252 : 2.5V, Accuracy $\pm 2\%$ 28A : 2.85V, Accuracy $\pm 2\%*$ "A" indicates voltage of 50mV steps		T	TO-92 (Standard)	
				L	TO-92 (Custom pin configuration)	
					Device Orientation	
				R	Embossed Tape (Standard Feed)	
				L	Embossed Tape (Reverse Feed)	
				H	Paper Type (TO-92)	
				B	Bag (TO-92)	

Note\*: Output Voltage in 50mV steps is applied only for 2.85V type.

Accuracy of  $\pm 1\%$  is available as custom-designed products.



### ■Packaging Information

●SOT-89

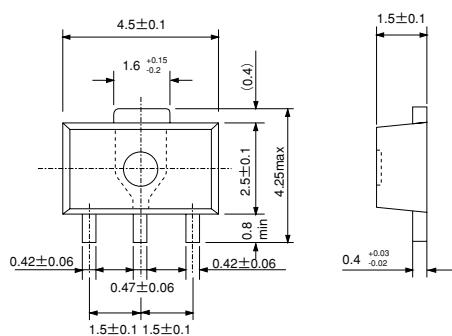


3

●SOT-223

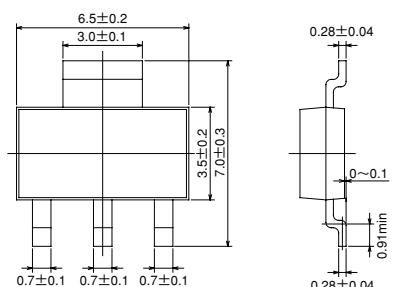


## XC6203 Series

●TO-92

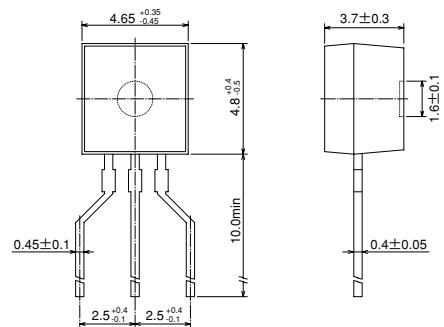


3



## ■Marking

●SOT-89, SOT-223



3

① Represents the product name

DESIGNATOR	PRODUCT NAME	
3	XC6203****	

② Represents the type of regulator

DESIGNATOR			PRODUCT NAME	
VOLTAGE=0.1~3.0V	VOLTAGE=3.1~6.0V	VOLTAGE=2.85V		
5	6	7	XC6203P****	
2	3	4	XC6203E****	

③ Represents the output voltage


DESIGNATOR	OUTPUT VOLTAGE (V)		DESIGNATOR	OUTPUT VOLTAGE (V)		
0	—	3.1	—	F	—	4.6
1	—	3.2	—	H	—	4.7
2	—	3.3	—	K	1.8	4.8
3	—	3.4	—	L	1.9	4.9
4	—	3.5	—	M	2.0	5.0
5	—	3.6	—	N	2.1	5.1
6	—	3.7	—	P	2.2	5.2
7	—	3.8	—	R	2.3	5.3
8	—	3.9	—	S	2.4	5.4
9	—	4.0	—	T	2.5	5.5
A	—	4.1	—	U	2.6	5.6
B	—	4.2	—	V	2.7	5.7
C	—	4.3	—	X	2.8	5.8
D	—	4.4	—	Y	2.9	5.9
E	—	4.5	—	Z	3.0	6.0
						2.85

④ Denotes the production lot number

0 to 9, A to Z repeated(G,I,J,O,Q,W excepted)

## XC6203 Series

●TO-92



3

① Represents the type of regulator

DESIGNATOR	PRODUCT NAME		
P	XC6203P*****		
E	XC6203E*****		

②③④ Represents the output voltage


DESIGNATOR			VOLTAGE (V)	VOLTAGE ACCURACY (%)	PRODUCT NAME
(2)	(3)	(4)			
3	3	2	3.3	±2	XC6203*33***
5	0	2	5.0	±2	XC6203*50***
2	8	A	2.85	±2	XC6203*28A**

⑤ Represents a least significant digit of the produced year

DESIGNATOR	PRODUCED YEAR
0	2000
1	2001

⑥ Denotes the production lot number  
0 to 9, A to Z repeated(G.I.J.O.Q.W excepted)  
Note: Character inversion is not used

### ■Block Diagram

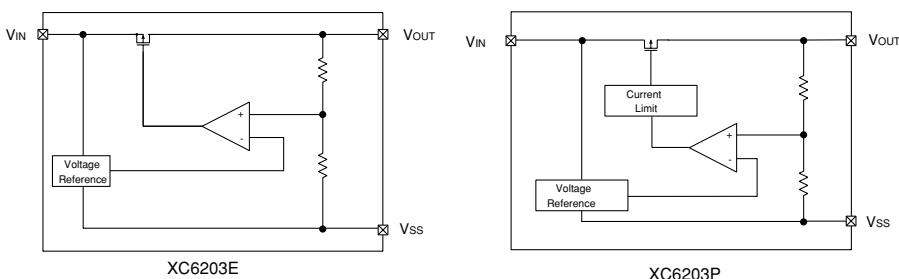

### ■Absolute Maximum Ratings

Ta=25°C

PARAMETER	SYMBOL	RATINGS	UNITS
Input Voltage	VIN	12	V
Output Current	IOUT	500	mA
Output Voltage	VOUT	VSS-0.3~VIN+0.3	V
Power Dissipation	SOT-89	500	mW
	SOT-223	1,200 (NOTE)	
	TO-92	300	
Operating Ambient Temperature	Topr	-40~+85	°C
Storage Temperature	Tstg	-40~+125	°C

Note: Circuits board mounting : Double-sided board

## ■Electrical Characteristics

XC6203X182 V<sub>OUT</sub>(T)=1.8V (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V <sub>OUT</sub> (E) (Note2)	V <sub>IN</sub> =2.8V I <sub>OUT</sub> =40mA	1.764	1.800	1.836	V
Maximum Output Current	I <sub>OUT</sub> max	V <sub>IN</sub> =2.8V V <sub>OUT</sub> >V <sub>OUT</sub> (E) × 0.90	400			mA
Load Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =2.8V 1mA≤I <sub>OUT</sub> ≤200mA		40	100	mV
Dropout Voltage (Note3)	V <sub>dif1</sub>	I <sub>OUT</sub> =100mA		200	300	mV
	V <sub>dif2</sub>	I <sub>OUT</sub> =200mA		400	600	
Supply Current	I <sub>SS</sub>	V <sub>IN</sub> =2.8V		8.0	16.0	μA
Line Regulation	ΔV <sub>OUT</sub> ΔV <sub>IN</sub> • ΔV <sub>OUT</sub>	I <sub>OUT</sub> =40mA 2.8V≤V <sub>IN</sub> ≤8.0V		0.2	0.3	%/V
Input Voltage	V <sub>IN</sub>			8		V
Output Voltage Temperature Characteristics	ΔV <sub>OUT</sub> ΔT <sub>opr</sub> • V <sub>OUT</sub>	I <sub>OUT</sub> =40mA -40°C≤T <sub>opr</sub> ≤85°C		±100		ppm/ <sup>°</sup> C
Short Circuit Current (XC6203P Series Only)	I <sub>lim</sub>	V <sub>IN</sub> =2.8V V <sub>OUT</sub> =0V		60		mA

XC6203X252 V<sub>OUT</sub>(T)=2.5V (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V <sub>OUT</sub> (E) (Note2)	V <sub>IN</sub> =3.5V I <sub>OUT</sub> =40mA	2.450	2.500	2.550	V
Maximum Output Current	I <sub>OUT</sub> max	V <sub>IN</sub> =3.5V V <sub>OUT</sub> >V <sub>OUT</sub> (E) × 0.93	400			mA
Load Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =3.5V 1mA≤I <sub>OUT</sub> ≤200mA		40	100	mV
Dropout Voltage (Note3)	V <sub>dif1</sub>	I <sub>OUT</sub> =100mA		170	250	mV
	V <sub>dif2</sub>	I <sub>OUT</sub> =200mA		320	500	
Supply Current	I <sub>SS</sub>	V <sub>IN</sub> =3.5V		8.0	16.0	μA
Line Regulation	ΔV <sub>OUT</sub> ΔV <sub>IN</sub> • ΔV <sub>OUT</sub>	I <sub>OUT</sub> =40mA 3.5V≤V <sub>IN</sub> ≤8.0V		0.2	0.3	%/V
Input Voltage	V <sub>IN</sub>			8		V
Output Voltage Temperature Characteristics	ΔV <sub>OUT</sub> ΔT <sub>opr</sub> • V <sub>OUT</sub>	I <sub>OUT</sub> =40mA -40°C≤T <sub>opr</sub> ≤85°C		±100		ppm/ <sup>°</sup> C
Short Circuit Current (XC6203P Series Only)	I <sub>lim</sub>	V <sub>IN</sub> =3.5V V <sub>OUT</sub> =0V		60		mA

## XC6203 Series

3

XC6203X302 VOUT(T)=3.0V<sup>(Note 1)</sup>

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	VOUT(E) <sup>(Note2)</sup>	VIN=4V IOUT=40mA	2.940	3.000	3.060	V
Maximum Output Current	IOUTmax	VIN=4V VOUT≥VOUT(E)×0.96	400			mA
Load Regulation	ΔVOUT	VIN=4V 1mA≤IOUT≤200mA		40	100	mV
Dropout Voltage <sup>(Note3)</sup>	Vdif1	IOUT=100mA		150	220	mV
	Vdif2	IOUT=200mA		300	420	
Supply Current	ISS	VIN=4V		8.0	16.0	μA
Line Regulation	$\frac{\Delta VOUT}{\Delta VIN \cdot \Delta VOUT}$	IOUT=40mA 4V≤VIN≤8.0V		0.2	0.3	%/V
Input Voltage	VIN				8	V
Output Voltage	$\frac{\Delta VOUT}{\Delta Topr \cdot VOUT}$	IOUT=40mA -40°C≤Topr≤85°C		±100		ppm/ <sup>°</sup> C
Short Circuit Current (XC6203P Series Only)	Ilim	VIN=4V VOUT=0V		60		mA

XC6203X332 VOUT(T)=3.3V<sup>(Note 1)</sup>

Ta=25°C


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	VOUT(E) <sup>(Note2)</sup>	VIN=4.3V IOUT=40mA	3.234	3.300	3.366	V
Maximum Output Current	IOUTmax	VIN=4.3V VOUT≥VOUT(E)×0.96	400			mA
Load Regulation	ΔVOUT	VIN=4.3V 1mA≤IOUT≤200mA		40	100	mV
Dropout Voltage <sup>(Note3)</sup>	Vdif1	IOUT=100mA		150	220	mV
	Vdif2	IOUT=200mA		300	420	
Supply Current	ISS	VIN=4.3V		8.0	16.0	μA
Line Regulation	$\frac{\Delta VOUT}{\Delta VIN \cdot \Delta VOUT}$	IOUT=40mA 4.3V≤VIN≤8.0V		0.2	0.3	%/V
Input Voltage	VIN				8	V
Output Voltage	$\frac{\Delta VOUT}{\Delta Topr \cdot VOUT}$	IOUT=40mA -40°C≤Topr≤85°C		±100		ppm/ <sup>°</sup> C
Short Circuit Current (XC6203P Series Only)	Ilim	VIN=4.3V VOUT=0V		60		mA

XC6203X502 VOUT(T)=5.0V (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	VOUT(E) (Note2)	VIN=6.0V IOUT=40mA	4.900	5.000	5.100	V
Maximum Output Current	IOUTmax	VIN=6.0V VOUT≥VOUT(E)×0.96	400			mA
Load Regulation	ΔVOUT	VIN=6.0V 1mA≤IOUT≤200mA		40	100	mV
Dropout Voltage (Note3)	VdI1	IOUT=100mA		100	180	mV
	VdI2	IOUT=200mA		200	320	
Supply Current	ISS	VIN=6.0V		10.0	20.0	μA
Line Regulation	$\frac{\Delta VOUT}{\Delta VIN + \Delta VOUT}$	IOUT=40mA 6.0V≤VIN≤8.0V		0.2	0.3	%/V
Input Voltage	VIN			8		V
Output Voltage	$\frac{\Delta VOUT}{\Delta Topr + VOUT}$	IOUT=40mA -40°C≤Topr≤85°C		±100		ppm /°C
Short Circuit Current (XC6203P Series Only)	Ilim	VIN=6.0V VOUT=0V		60		mA

- Note : 1. VOUT(T) = Specified Output Voltage.  
 2. VOUT(E) = Effective Output Voltage (i.e. the output voltage when "Vout(T)+1.0V" is provided at the Vin pin while maintaining a certain Iout value).  
 3. VdI = VIN1 - VOUT1  
 4. VOUT1 = A voltage equal to 98% of the output voltage when "Vout(T)+1.0V" is input.e  
 5. VIN1 = The input voltage when VOUT1 is output following a gradual decrease in the input voltage.

## ■Typical Application Circuit

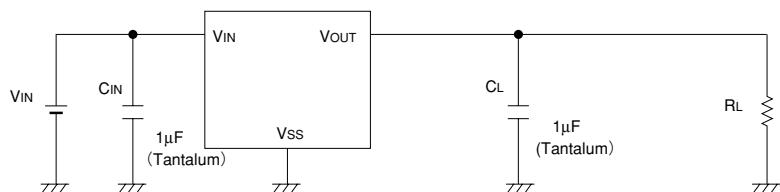


## XC6203 Series

3


### ■Typical Performance Characteristics

●XC6203E182PR


(1) OUTPUT VOLTAGE vs. OUTPUT CURRENT




(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE




(3) DROPOUT VOLTAGE vs. OUTPUT CURRENT




(4) SUPPLY CURRENT vs. INPUT VOLTAGE



(5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE




(6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE




## XC6203 Series

### (7) INPUT TRANSIENT RESPONSE

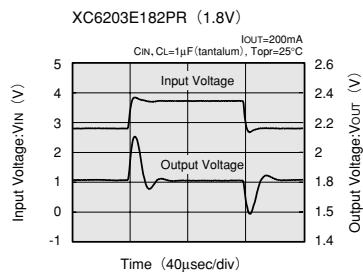


3

### (8) LOAD TRANSIENT RESPONSE

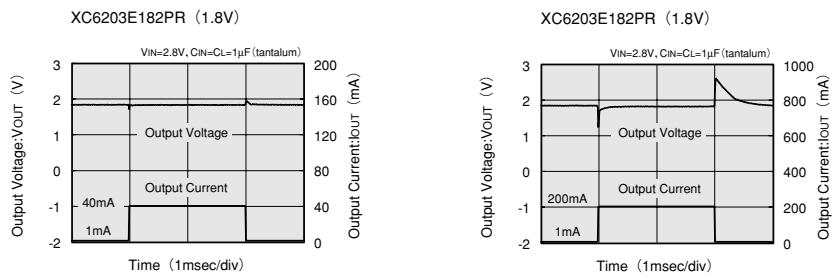


### (9) RIPPLE REJECTION RATE

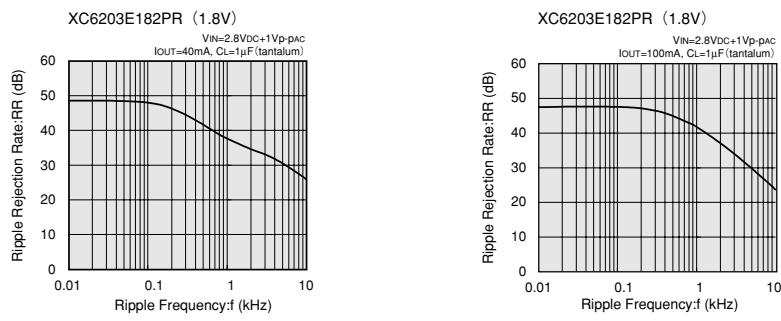


## XC6203 Series

● XC6203E252PR


(1) OUTPUT VOLTAGE vs. OUTPUT CURRENT




(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE




(3) DROPOUT VOLTAGE vs. OUTPUT CURRENT




(4) SUPPLY CURRENT vs. INPUT VOLTAGE



(5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE





(6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE





## XC6203 Series

### (7) INPUT TRANSIENT RESPONSE

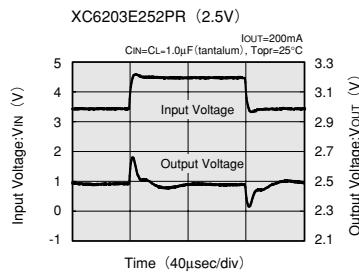
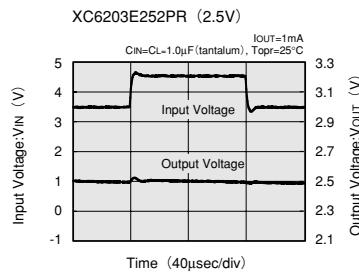


3

### (8) LOAD TRANSIENT RESPONSE

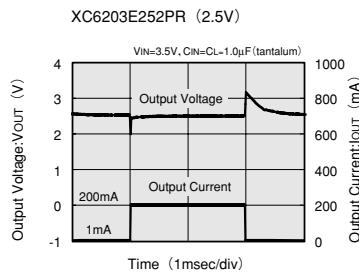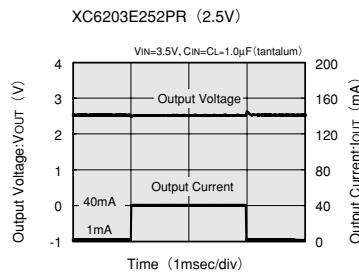


### (9) RIPPLE REJECTION RATE




## XC6203 Series

● XC6203E332PR


(1) OUTPUT VOLTAGE vs. OUTPUT CURRENT




(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE




(3) DROPOUT VOLTAGE vs. OUTPUT CURRENT




(4) SUPPLY CURRENT vs. INPUT VOLTAGE



(5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE





(6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE





## XC6203 Series

### (7) INPUT TRANSIENT RESPONSE

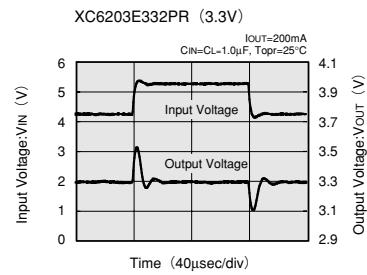
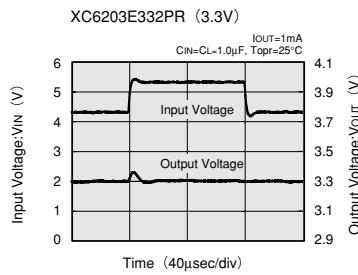


3

### (8) LOAD TRANSIENT RESPONSE

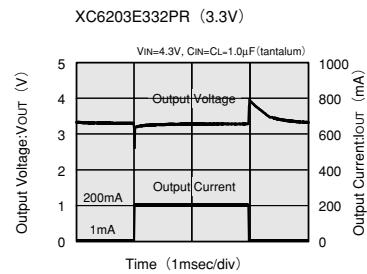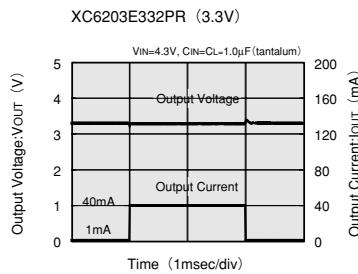


### (9) RIPPLE REJECTION RATE




## XC6203 Series

● XC6203E502PR


(1) OUTPUT VOLTAGE vs. OUTPUT CURRENT




(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE




(3) DROPOUT VOLTAGE vs. OUTPUT CURRENT




(4) SUPPLY CURRENT vs. INPUT VOLTAGE



(5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE





(6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE





## XC6203 Series

### (7) INPUT TRANSIENT RESPONSE

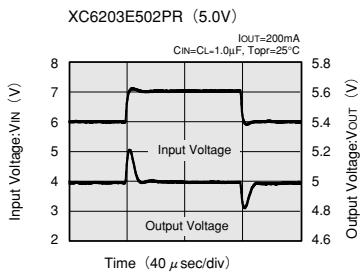
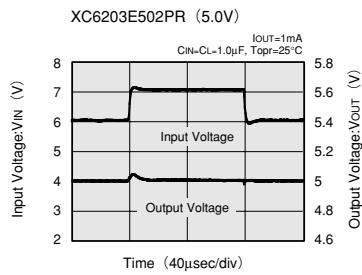


3

### (8) LOAD TRANSIENT RESPONSE

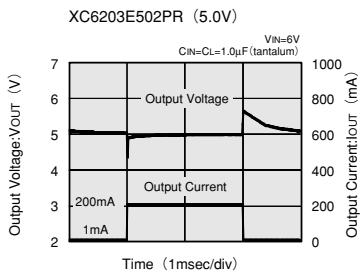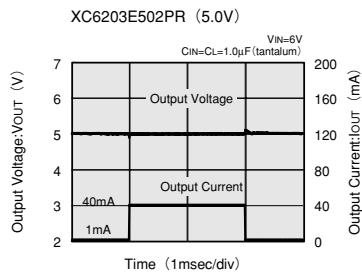

### (9) RIPPLE REJECTION RATE



## XC6203 Series

3

(10) OUTPUT VOLTAGE vs. OUTPUT CURRENT

