


Single Operational Amplifiers

TBA 221; TBB 741
TBA 222; TBB 742

Features

- NPN input
- High differential input voltage
- Short-circuit proof
- High voltage gain
- High supply voltage 44 V
- Wide temperature range (TBA 222, TBB 742)
- Push-pull output
- B S1-version for high quality


Bipolar IC

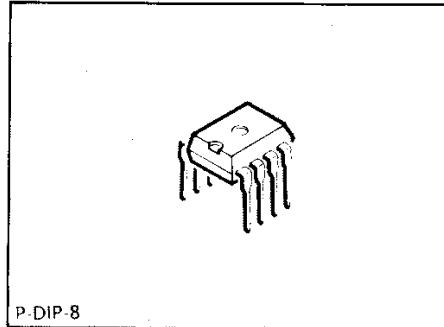

P-DIP-8

Applications

- Amplifier
- Comparator

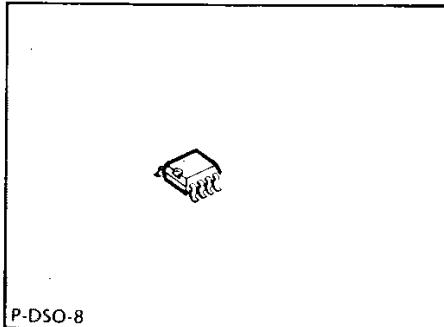


P-DSO-8

| Type | Ordering Code | Package | Color Code |
|---------------|-------------------|---------------|------------|
| S TBA 221 B | Q67000-A281 | P-DIP-8 | — |
| S TBA 222 B | Q67000-A2280 | P-DIP-8 | — |
| TBA 222 B S1 | Q67000-A8057 | P-DIP-8 | — |
| ■ S TBB 741 G | Q67000-A1498 | P-DSO-8 (SMD) | blue/brown |
| ■ S TBB 742 G | Q67000-A2395-G403 | P-DSO-8 (SMD) | red/green |

■ = Not for new design

These op amps are short-circuit proof to $+V_S$, $-V_S$. The input offset voltage can be very easily compensated. Very few external components are required due to the internal frequency compensation. The gain reduction by 6 dB/octave yields a very good stability.


Circuit Diagram

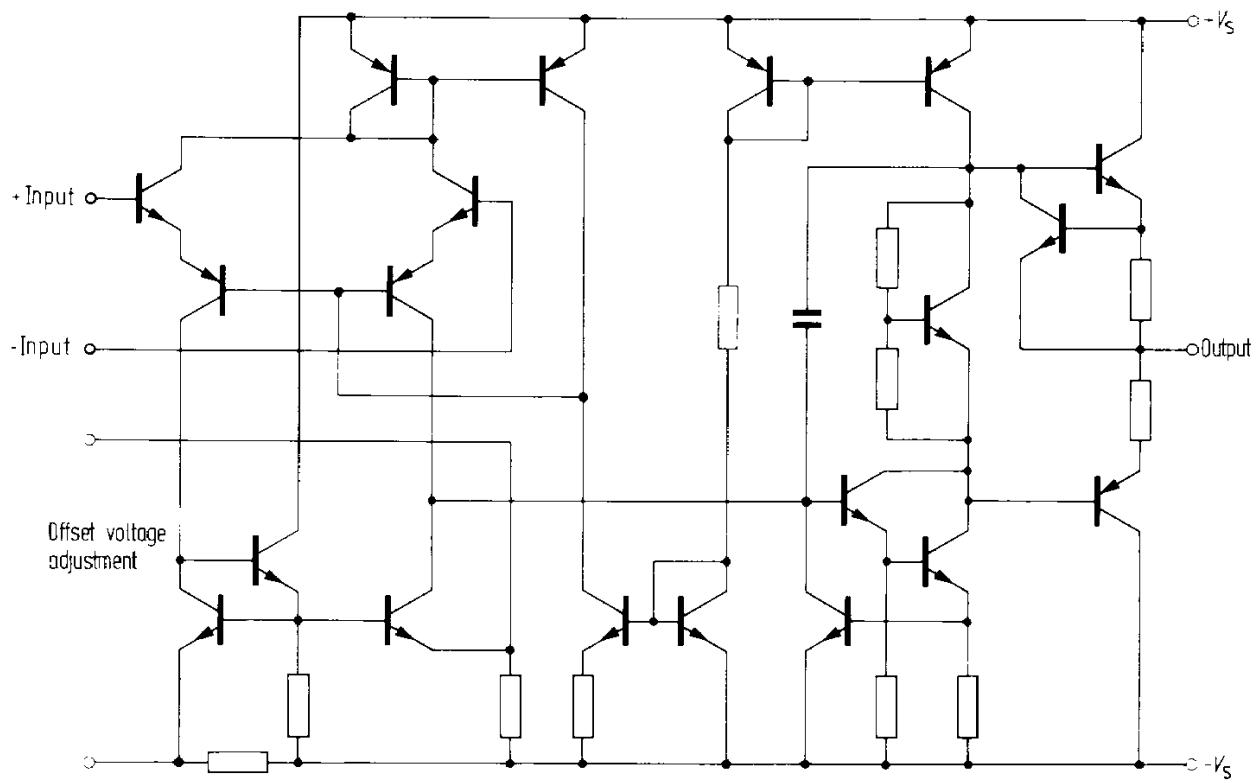


Pin Configurations

(top view)

**TBA 221 B
TBA 222 B
TBA 222 B S1**

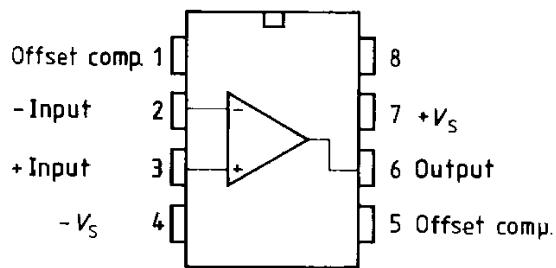

**TBB 741 G
TBB 742 G**

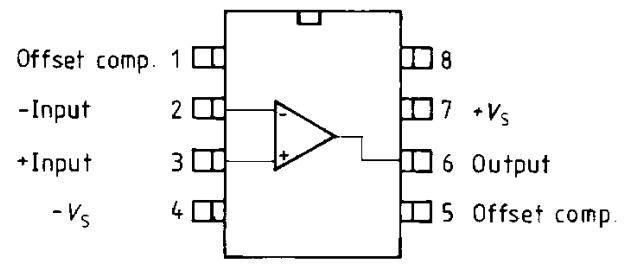

Absolute Maximum Ratings

| Parameter | Symbol | Limit Values | | Unit |
|---|---------------|----------------------------|----------------------------|-------------|
| | | TBA 221 TBB 741 | TBA 222 TBB 742 | |
| Supply voltage | V_S | ± 18 | ± 22 | V |
| Input voltage: $V_S = \pm 4$ to ± 15 V $V_S \geq 15$ V | V_I | $\pm V_S$ | $\pm V_S$ | V |
| | V_I | ± 15 | ± 15 | V |
| Differential input voltage | V_{ID} | ± 30 | ± 30 | V |
| Output short-circuit duration ¹⁾ | t_{QSC} | ∞ | ∞ | |
| Junction temperature | T_j | 150 | 150 | °C |
| Storage temperature range | T_{stg} | −55 to 125 | −65 to 125 | °C |
| Thermal resistance system – air | $R_{th\ SA}$ | 100 | 100 | K/W |
| TBA 221B/222B; BS1 TBB 741 G/742 G | $R_{th\ SA}$ | 200 | 200 | K/W |

¹⁾ Short circuit may be to $+V_S$, $-V_S$, or 0, whereby maximum ratings like T_j must not be exceeded.

Operating Range

| | | | | |
|---------------------|-------|---------------------|---------------------|----|
| Supply voltage | V_S | ± 4 to ± 18 | ± 4 to ± 22 | V |
| Ambient temperature | T_A | 0 to 70 | −55 to 125 | °C |

Characteristics

$V_S = \pm 15$ V

| Parameter | Symbol | Limit Values $T_A = 25$ °C | | | Limit Values $T_A = 0$ °C to 70 °C | | Unit |
|--|---------------|--------------------------------------|-------------|-------------|---|-------------|-------------|
| | | min. | typ. | max. | min. | max. | |
| Input offset voltage $R_G \leq 10$ kΩ | V_{IO} | −6 | | 6 | −7.5 | 7.5 | mV |
| Setting range of V_{IO} | V_{IO} | 6 | ± 15 | −6 | | | mV |
| Input offset current | I_{IO} | −200 | ± 20 | 200 | −300 | 300 | nA |
| Input current | I_I | 80 | 500 | | 800 | | nA |
| Supply current | I_S | 1.7 | 2.8 | | 2.8 | | mA |
| Pos. output short-circuit current | I_{QSC+} | 15 | 20 | 25 | | | mA |
| Neg. output short-circuit current | I_{QSC} | −25 | −20 | −15 | | | mA |
| Input resistance | R_I | 300 | 2000 | | | | kΩ |
| Input capacitance | C_I | | 1.4 | | | | pF |
| Output resistance | R_Q | | 75 | | | | Ω |
| Control range $R_G \geq 10$ kΩ | $V_{Q\ pp}$ | 13 | ± 14 | −12.5 | | | V |
| $R_L \geq 2$ kΩ | $V_{Q\ pp}$ | 11 | ± 13 | −11 | | | V |
| Common-mode input voltage range | V_{IC} | $-V_S + 3$ | | $V_S - 3$ | | | V |

Characteristics

$V_S = \pm 15 \text{ V}$

| Parameter | Symbol | Limit Values $T_A = 25^\circ\text{C}$ | | | Limit Values $T_A = 0^\circ\text{C}$ to 70°C | | Unit |
|---|------------------|---|-------------|-------------|---|-------------|------------------------|
| | | min. | typ. | max. | min. | max. | |
| Open-loop voltage gain $V_{Q\text{ pp}} = \pm 10 \text{ V}, R_L \geq 2 \text{ k}\Omega$ | G_{V0} | 86 | 100 | | 84 | | dB |
| Common-mode rejection ($R_G \leq 10 \text{ k}\Omega$) | k_{CMR} | 70 | 90 | | | | dB |
| Supply voltage rejection | k_{SVR} | | 30 | 150 | | | $\mu\text{V/V}$ |
| Transient response of output voltage at $G_V = 1$: Rise time, $V_I = 20 \text{ mV}$, $R_L = 2 \text{ k}\Omega; C_L \leq 100 \text{ pF}$ | t_r | | 0.3 | | | | μs |
| Overshoot | | | 5 | | | | % |
| Slew rate ¹⁾ $R_L \leq 2 \text{ k}\Omega$ | SR | | 0.5 | | | | $\text{V}/\mu\text{s}$ |
| Temperature coefficient of V_{IO} | α_{VIO} | | 3 | | | | $\mu\text{V/K}$ |
| Temperature coefficient of I_{IO} | α_{IIO} | | 0.4 | | | | nA/K |

Characteristics (TBA 222, TBB 742)

$V_S = \pm 15 \text{ V}$

| | | | | | | | |
|--|-------------------|------------|----------|-----------|------|------|-----------------|
| Input offset voltage $R_G \leq 10 \text{ k}\Omega$ | V_{IO} | -4 | | 4 | -5.5 | 5.5 | mV |
| Setting range of V_{IO} | V_{IO} | 6 | ± 15 | -6 | | | mV |
| Input offset current | I_{IO} | -100 | ± 20 | 100 | -400 | 400 | nA |
| Input current | I_I | 80 | 350 | | | 1200 | nA |
| Supply current | I_S | 1.7 | 2.8 | | | 2.8 | mA |
| Pos. output short-circuit current | I_{QSC+} | 15 | 20 | 25 | | | mA |
| Neg. output short-circuit current | I_{QSC-} | -25 | -20 | -15 | | | mA |
| Input resistance | R_I | 300 | 2000 | | | | k Ω |
| Input capacitance | C_I | | 1.4 | | | | pF |
| Output resistance | R_Q | | 75 | | | | Ω |
| Control range $R_L \geq 10 \text{ k}\Omega$ | $V_{Q\text{ pp}}$ | 13 | ± 14 | -12.5 | | | V |
| $R_L \geq 2 \text{ k}\Omega$ | $V_{Q\text{ pp}}$ | 11 | ± 13 | -11 | | | V |
| Common-mode input voltage range | V_{IC} | $-V_S + 3$ | | $V_S - 3$ | | | V |
| Open-loop voltage gain $V_{Q\text{ pp}} = \pm 10 \text{ V}, R_L \geq 2 \text{ k}\Omega$ | G_{V0} | 94 | 106 | | 88 | | dB |
| Common-mode rejection $R_G \leq 10 \text{ k}\Omega$ | k_{CMR} | 80 | 90 | | | | dB |
| Supply voltage rejection | k_{SVR} | | 30 | 100 | | | $\mu\text{V/V}$ |

¹⁾ For the relationship between power bandwidth and slew rate refer to "Introduction – Operational Amplifiers"

Characteristics (TBA 222, TBA 742)

$V_S = \pm 15 \text{ V}$


| Parameter | Symbol | Limit Values $T_A = 25^\circ\text{C}$ | | | Limit Values $T_A = 0^\circ\text{C}$ to 70°C | | Unit |
|--|----------------------------------|---|-------------|-------------|---|-------------|--|
| | | min. | typ. | max. | min. | max. | |
| Transient response of output voltage at $G_V = 1$: Rise time, $V_t = 20 \text{ mV}$, $R_L = 2 \text{ k}\Omega$, $C_L \leq 100 \text{ pF}$ | t_r | | 0.3 | | | | μs |
| Overshoot | | | 5 | | | | % |
| Slew rate ¹⁾ $R_L \leq 2 \text{ k}\Omega$ | SR | | 0.5 | | | | $\text{V}/\mu\text{s}$ |
| Temperature coefficient of V_{IO} Temperature coefficient of I_{IO} | α_{VIO} α_{IIO} | | 3 0.4 | | | | $\mu\text{V}/\text{K}$ nA/K |

TBA 222 B S1

The TBA 222 B S1 is similar to TBA 222 B, however, with special quality features.


1. 72 hours electrically preaged at $T_A = 50^\circ\text{C}$, $V_S \pm 22 \text{ V}$ corresponding to the circuit shown below
2. Noise $< 5 \mu\text{Vs}$ in accordance with DIN 45405

Circuit, Preageing for TBA 222 B S1

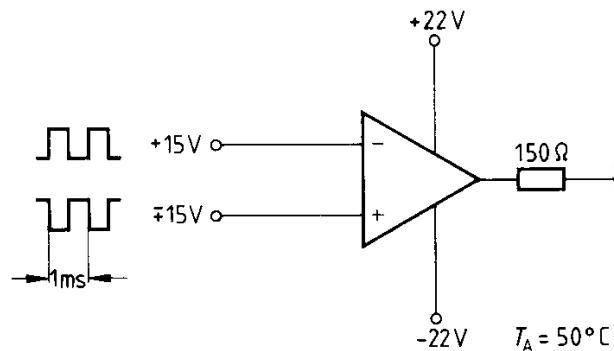


¹⁾ For the relationship between power bandwidth and slew rate refer to "Introduction – Operational Amplifier"


Open-loop voltage gain versus supply voltage

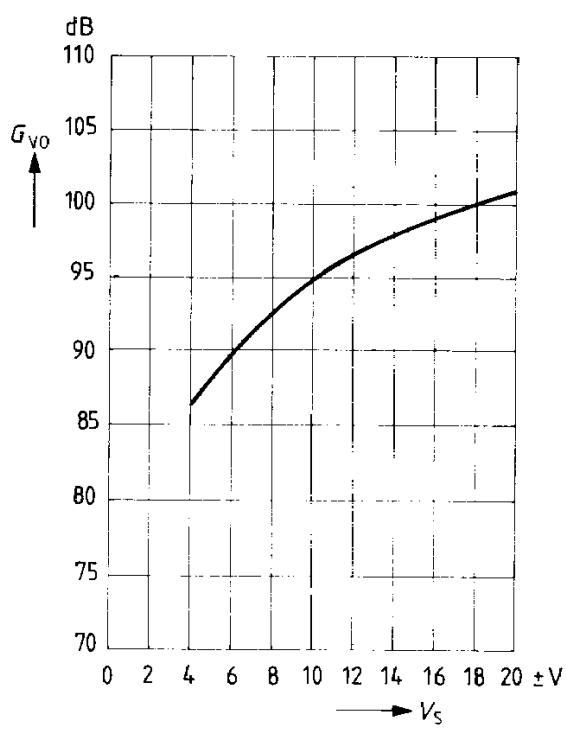


Output voltage versus supply voltage

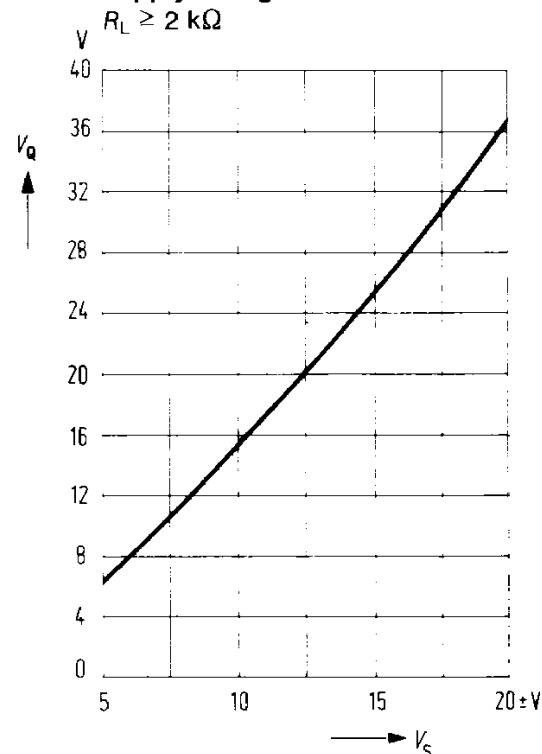


Common-mode range versus supply voltage

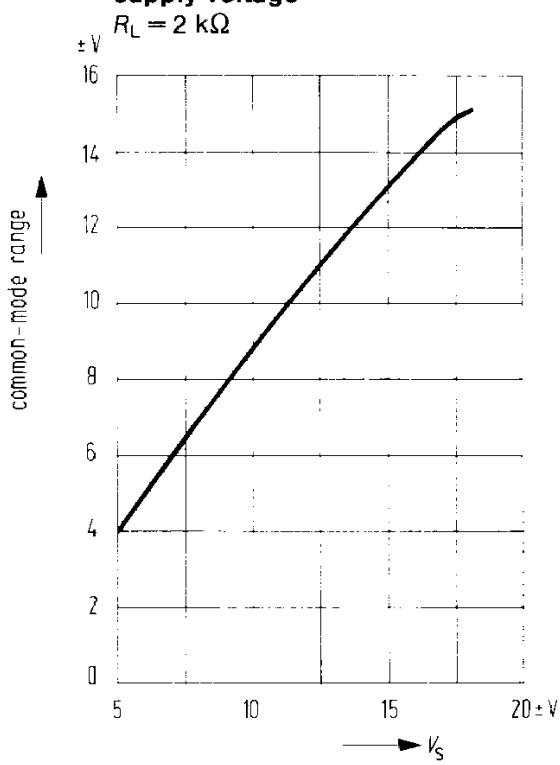


Output short-circuit current versus ambient temperature

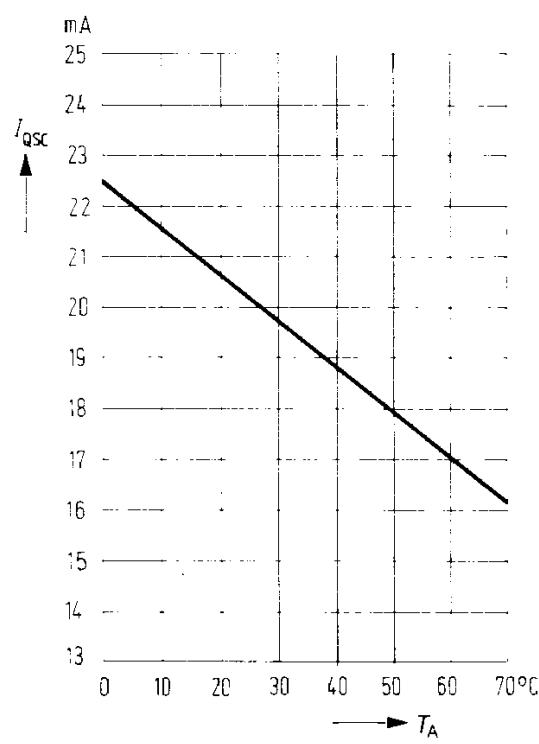


Input current versus ambient temperature
 $V_S = \pm 15 \text{ V}$

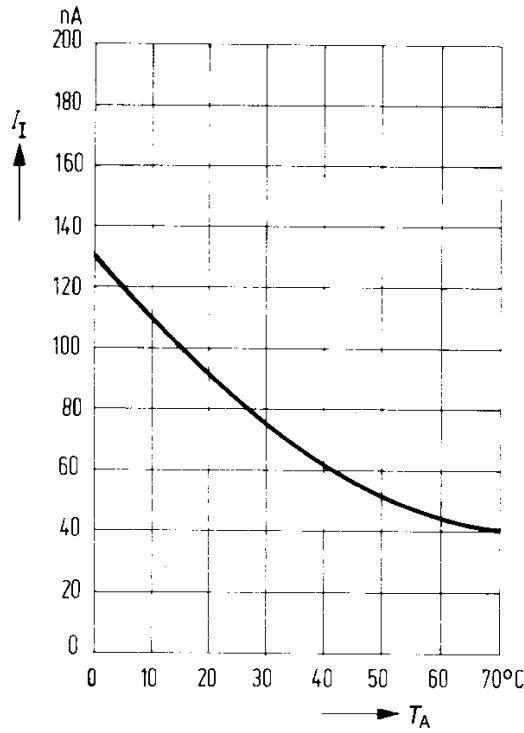


Input resistance versus ambient temperature
 $V_S = \pm 15 \text{ V}$




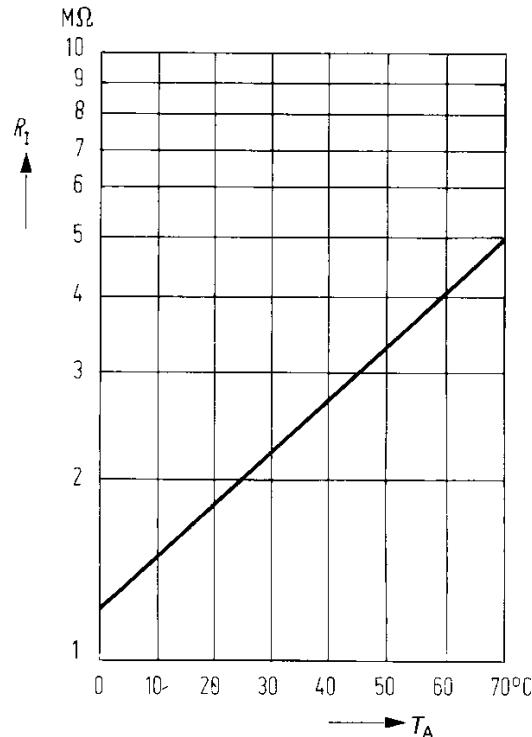


Input offset current versus supply voltage

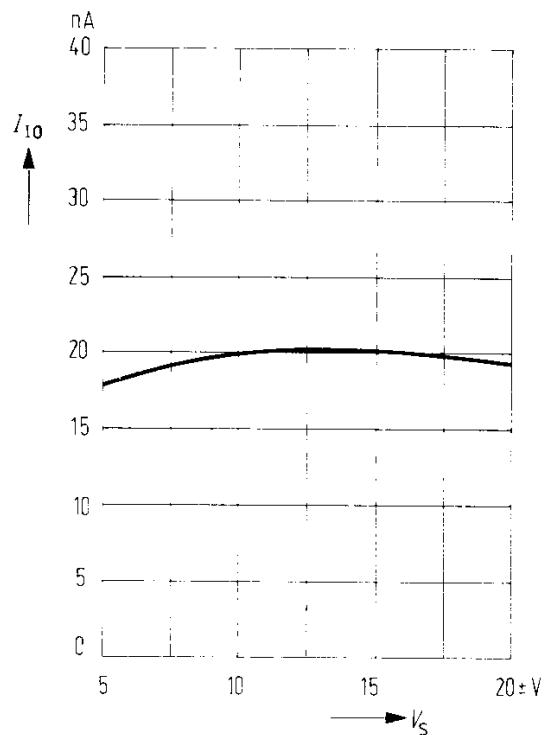


Input offset current versus ambient temperature

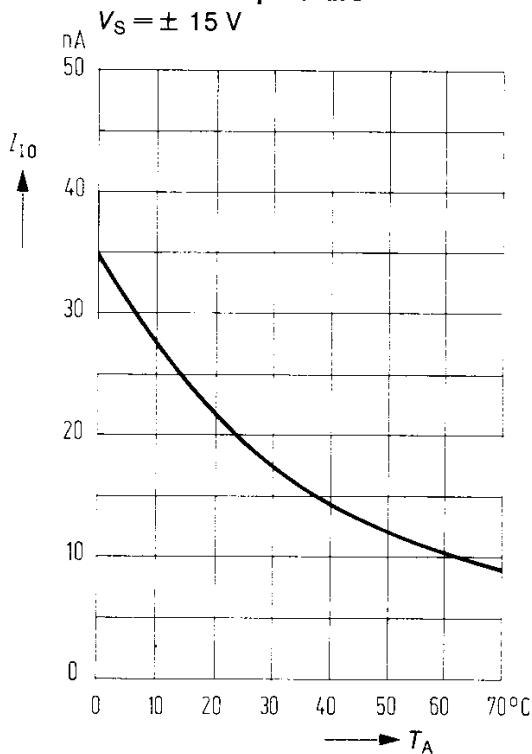


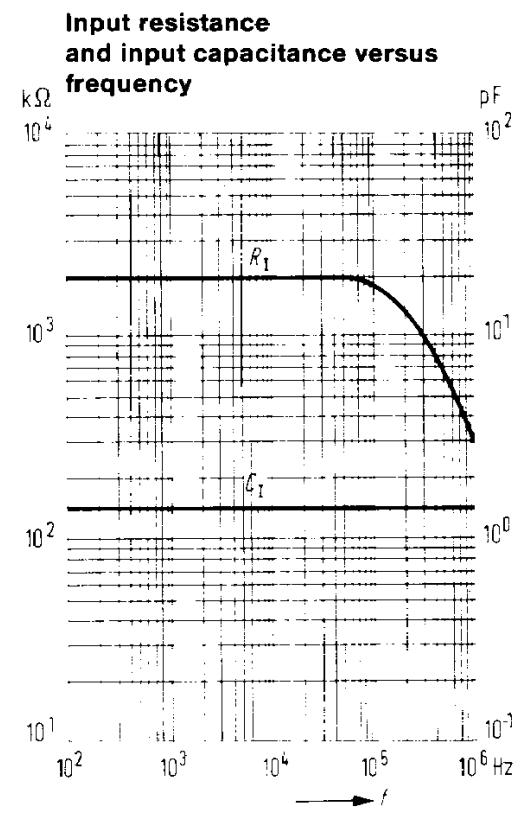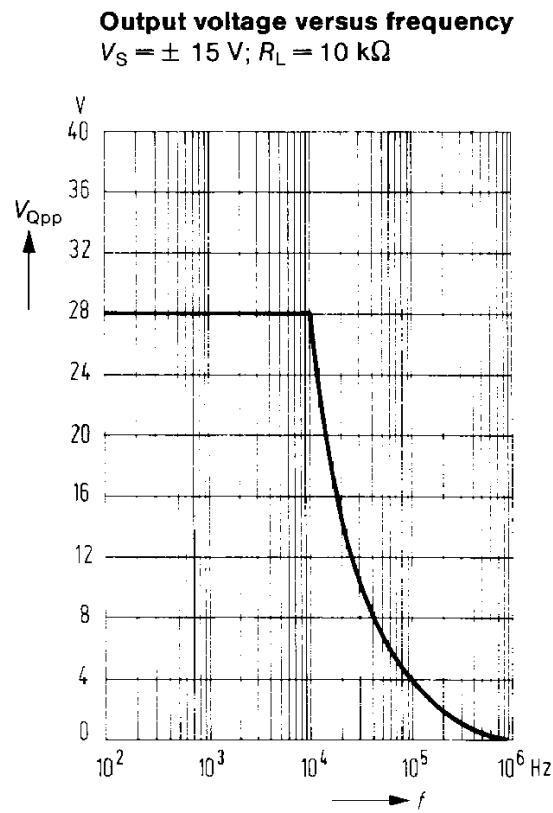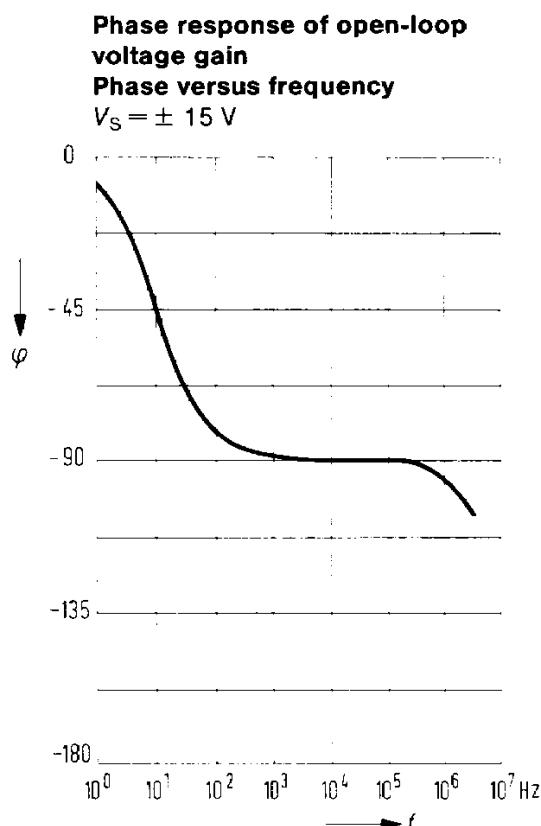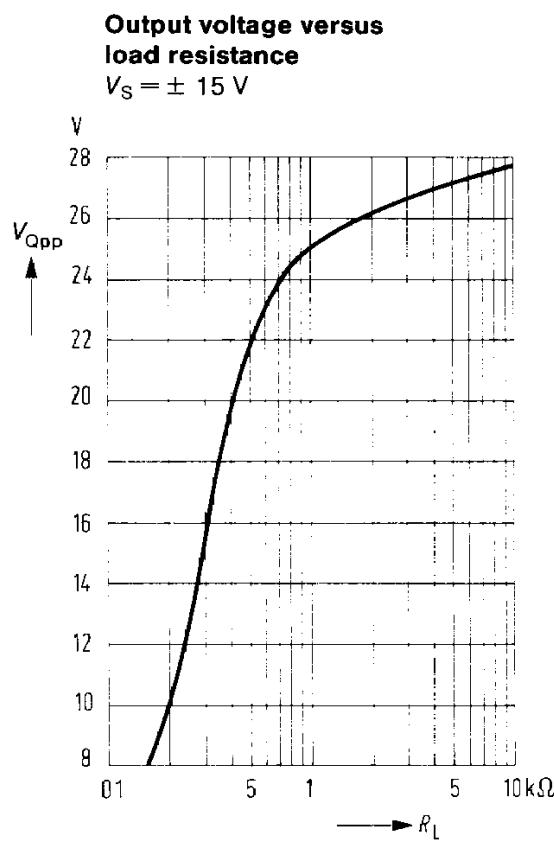


Output resistance versus frequency

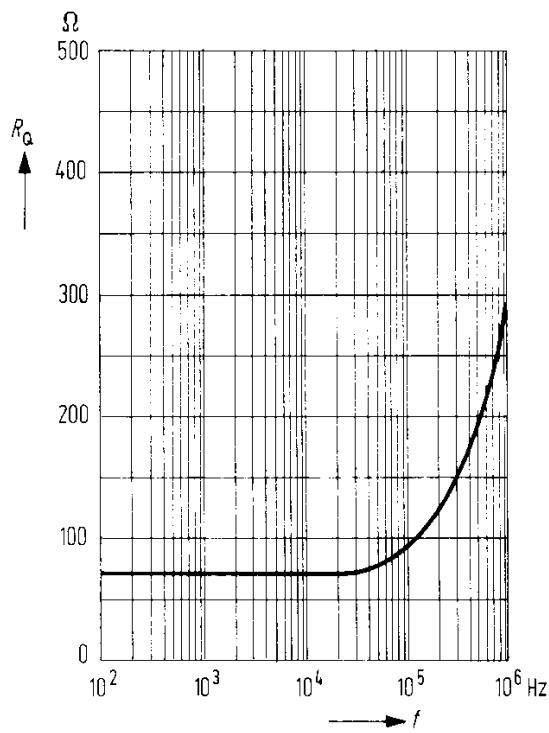


Open-loop voltage gain versus frequency

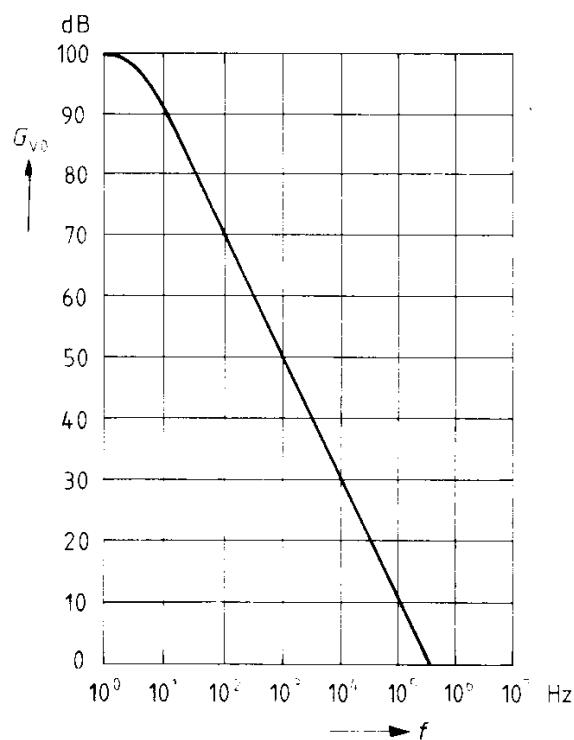

Supply current versus supply voltage

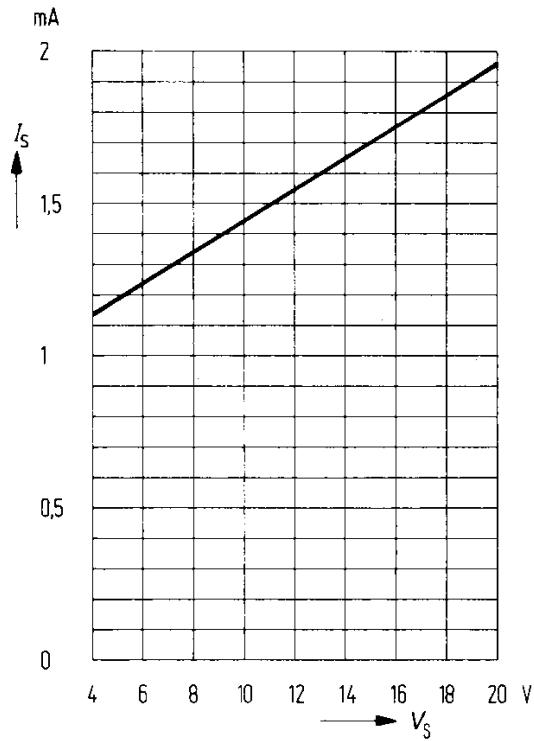

Offset voltage adjustment circuit



Transient response

