

LOW VOLTAGE MICROPHONE AMPLIFIER for PORTABLE AUDIO


■ GENERAL DESCRIPTION

The NJM2173 is a low voltage microphone amplifier designed for portable audio items.

It includes standby, two-type gain selector, and power ripple rejection adjustment circuit. It realizes very low turn-noise at standby mode.

It is suitable for portable Mini-Disc, portable Compact-Disc, and other microphone amplifier application.

■ PACKAGE OUTLINE



NJM2173AV



NJM2173APC1




NJM2173ASE4

■ FEATURES


- Operating Voltage Range 2.7 to 4.5V
- Operating Current 2.2mA typ. at $V^+ = 2.7V$
- Supply Current in Standby Mode $1\mu A$ max.
- Maximum Output Voltage $-1.5dBV$ typ. at THD=0.1%
- Internal Two-type Gain Select Function 13dB typ./ 29dB typ.
- Internal Standby Function
- Power Ripple Rejection Terminal 95dB typ. at $G_v = 13dB$
- Bipolar Technology
- Package Outline SSOP14, FFP16, P-CSP16

■ BLOCK DIAGRAM

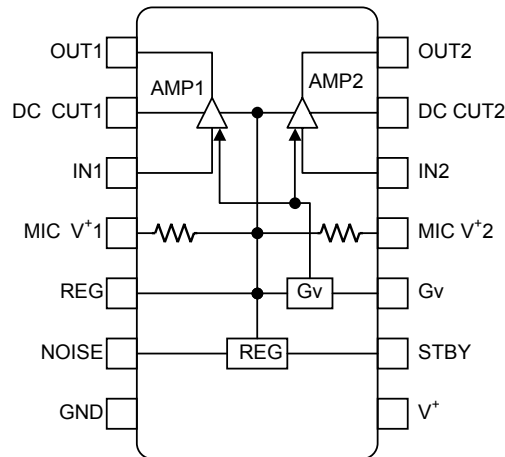

■ PIN FUNCTION


SSOP14



No.	SYMBOL	FUNCTION
1	OUT1	AMP1 Output
2	DC CUT1	DC Cut Capacitor 1
3	IN1	AMP1 Input
4	MIC V ⁺ 1	MIC1 Power Output
5	REG	Internal Regulator Output
6	NOISE	Internal Regulator Noise Rejection Capacitor
7	GND	Ground
8	V ⁺	Power Supply
9	STBY	Stand-By Control
10	Gv	Gain Select
11	MIC V ⁺ 2	MIC2 Power Output
12	IN2	AMP2 Input
13	DC CUT2	DC Cut Capacitor 2
14	OUT2	AMP2 Output

■ PIN FUNCTION


FFP16

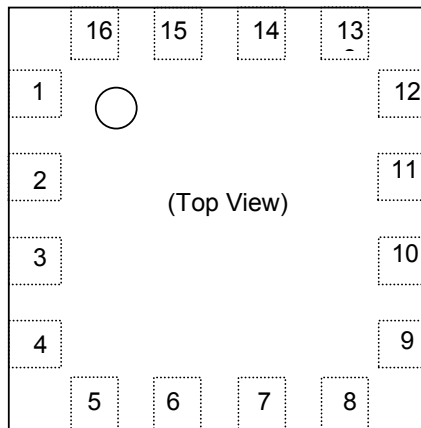

No.	SYMBOL	FUNCTION
1	DC CUT2	DC Cut Capacitor 2
2	IN2	AMP2 Input
3	MIC V ⁺ 2	MIC2 Power Output
4	Gv	Gain Select
5	STBY	Stand-By Control
6	V ⁺	Power Supply
7	GND	Ground
8	NOISE	Internal Regulator Noise Rejection Capacitor
9	REG	Internal Regulator Output
10	MIC V ⁺ 1	MIC1 Power Output
11	IN1	AMP1 Input
12	DC CUT1	DC Cut Capacitor 1
13	OUT1	AMP1 Output
14	N.C.	No Connect
15	N.C.	No Connect
16	OUT2	AMP2 Output

■ PIN FUNCTION

P-CSP16

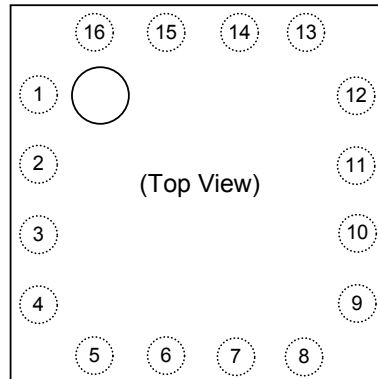

No.	SYMBOL	FUNCTION
1	DC CUT1	DC Cut Capacitor 1
2	IN1	AMP1 Input
3	MIC V ⁺ 1	MIC1 Power Output
4	REG	Internal Regulator Output
5	NOISE	Internal Regulator Noise Rejection Capacitor
6	GND	Ground
7	V ⁺	Power Supply
8	STBY	Stand-By Control
9	Gv	Gain Select
10	MIC V ⁺ 2	MIC2 Power Output
11	IN2	AMP2 Input
12	DC CUT2	DC Cut Capacitor 2
13	N.C.	No Connect
14	OUT2	AMP2 Output
15	OUT1	AMP1 Output
16	N.C.	No Connect

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	5	V
Maximum Input Voltage	V _{IN}	(IN1,IN2 pin) -0.3 to V _{REG} +0.3	V
Power Dissipation	P _D	SSOP14 ; 300 FFP16 ; 400 * P-CSP16 ; 690 *	mW
Operating Temperature Range	Topr	-20 to +75	°C
Storage Temperature Range	Tstg	-40 to +125	°C

* (Note) EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 4layers, FR4) mounting

■ ELECTRICAL CHARACTERISTICS (V⁺=2.7V, Gv=13dB, V_{IN}=-40dBV, R_L=9kΩ, f=1kHz, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage Range	V ⁺		2.7	-	4.5	V
Operating Current 1	I _{CC1}	Standby On:STBY= V ⁺	-	-	1.0	μA
Operating Current 2	I _{CC2}	G _V =29dB, No Signal, Standby Off :STBY=GND	-	2.2	2.8	mA
Output Voltage	V _O	No Signal	1.28	1.35	1.42	V
Voltage Gain 1	G _{V1}	10pin=L	12	13	14	dB
Voltage Gain 2	G _{V2}	10pin=H	28	29	30	dB
Maximum Output Voltage	V _{OM}	THD=0.1%	-2.7	-1.5	-	dBV
Total Harmonic Distortion	THD1	V _O =-28.2dBV	-	0.013	0.026	%
	THD2	G _V =29dB, V _O =-28.2dBV	-	0.05	0.1	%
Output Noise Voltage	V _{NO1}	Rg=600Ω, A-Weighted	-	-105 (5.63)	-100 (10)	dBV (μVrms)
	V _{NO2}	Rg=600Ω, A-Weighted, G _V =29dB	-	-95 (17.8)	-90 (32)	dBV (μVrms)
Channel Separation	CS1	Rg=600Ω, V _{IN} =-18dBV	-	105	-	dB
	CS2	Rg=600Ω, V _{IN} =-34dBV, G _V =29dB	80	90	-	dB
Supply Voltage Rejection Ratio	SVR1	V ⁺ =3V, ΔV ⁺ =-20dBV, Rg=600Ω	-	95	-	dB
	SVR2	V ⁺ =3V, ΔV ⁺ =-20dBV, Rg=600Ω G _V =29dB	70	80	-	dB
Microphone Regulator Output Voltage	V _{REG}	R _L =3.55kΩ	2.3	2.42	2.54	V
High Level Input Voltage G	V _{IHG}	Gv Terminal	2.0	-	V ⁺	V
Low Level Input Voltage G	V _{ILG}	Gv Terminal	0	-	0.5	V
High Level Input Voltage S	V _{IHS}	STBY Terminal	V ⁺ -0.5	-	V ⁺	V
Low Level Input Voltage S	V _{ILS}	STBY Terminal	0	-	V ⁺ -2.0	V

■ CONTROL TERMINAL EXPLANATION


● STBY (SSOP14;9Pin FFP16;5Pin ,P-CSP16;8Pin)

PARAMETER	CONTROL SIGNAL	STATUS
STANDBY OFF	L	IC is active.
STANDBY ON	H	IC is non-active.

● Gv (SSOP14;10Pin FFP16;4Pin ,P-CSP16;9Pin)


PARAMETER	CONTROL SIGNAL	STATUS
Gv1	L	IC set up 13dB typ. voltage gain.
Gv2	H	IC set up 29dB typ. voltage gain.

APPLICATION CIRCUIT (SSOP14)

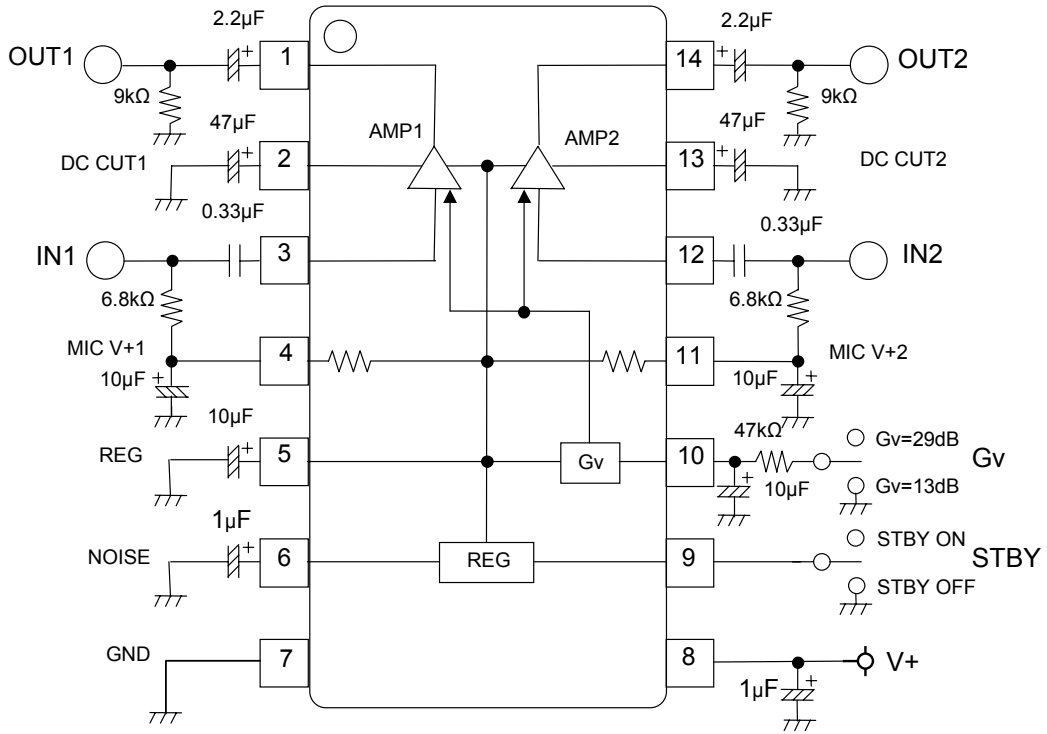


■ APPLICATION CIRCUIT (FFP16)

(Top View)

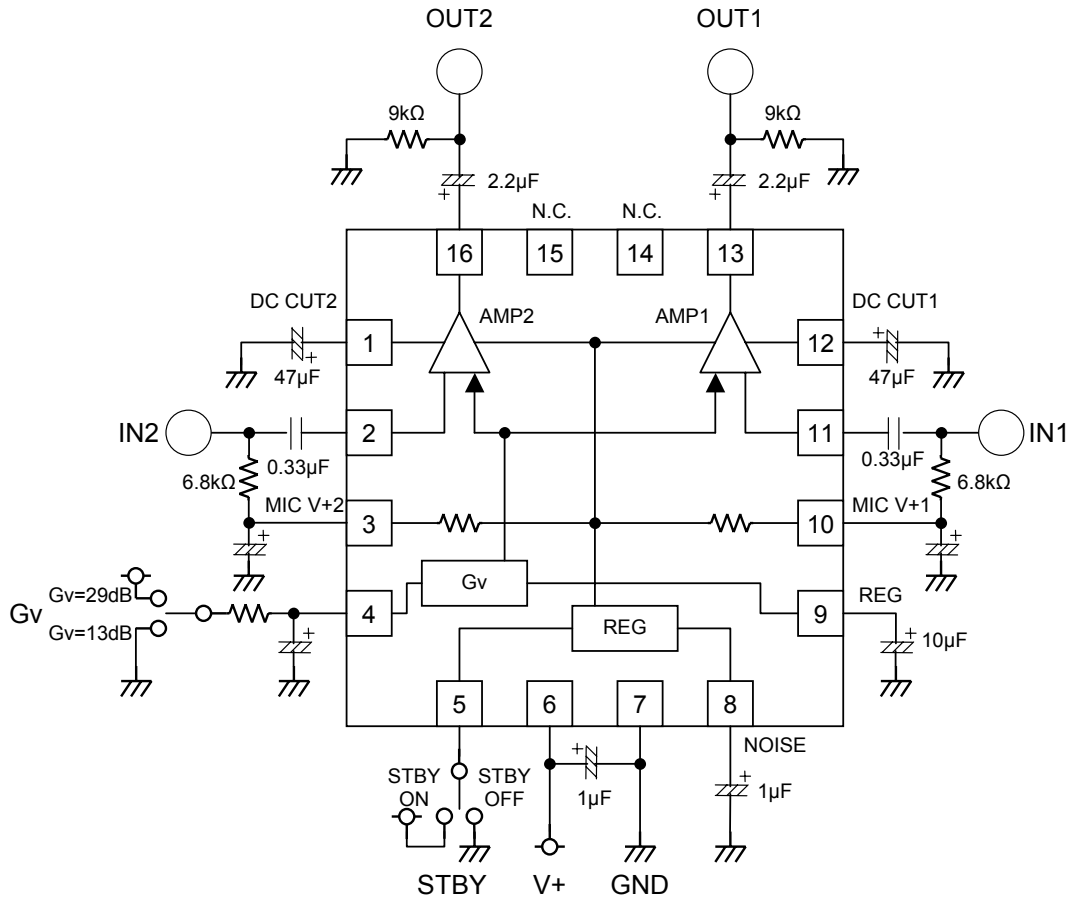

■ APPLICATION CIRCUIT (P-CSP16)

(Top View)

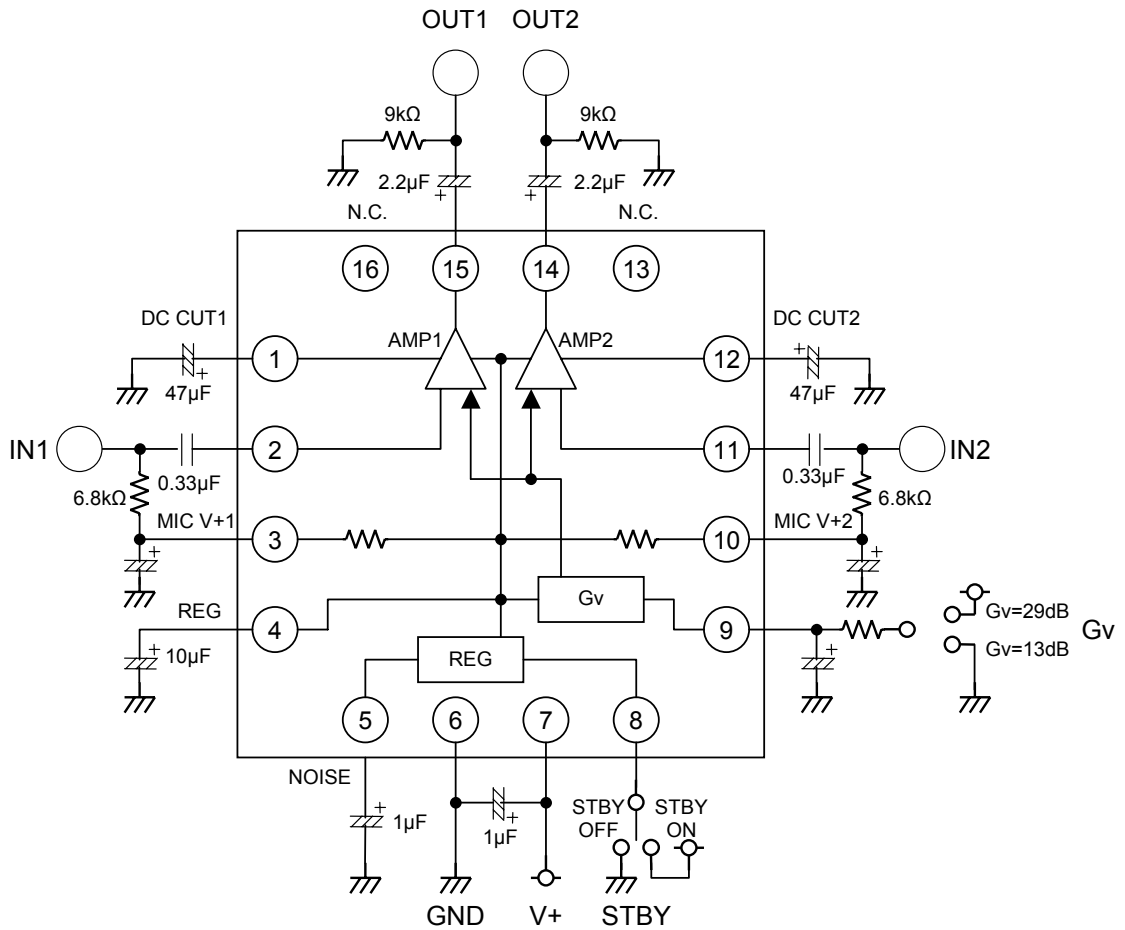







■ TERMINAL DESCRIPTION

PIN No.			SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	TERMINAL VOLTAGE
SSOP	FFP	PCSP				
1 14	13 16	15 14	OUT1 OUT2	AMP1 Output AMP2 Output		1.35V
2 13	12 1	1 12	DC CUT1 DC CUT2	DC Cut Capacitor 1 DC Cut Capacitor 2		1.35V
3 12	11 2	2 11	IN1 IN2	AMP1 Input AMP2 Input		1.35V
4 11	10 3	3 10	MIC V ⁺ 1 MIC V ⁺ 2	MIC1 Power Output MIC2 Power Output		2.42V
5	9	4	REG	Internal Regulator Output		2.42V


■ TERMINAL DESCRIPTION

PIN No.			SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	TERMINAL VOLTAGE
SSOP	FFP	PCSP				
6	8	5	NOISE	Internal Regulator Noise Rejection Capacitor		0.54V
9	5	8	STBY	Stand-By Control		-
10	4	9	Gv	Gain Select		-


TYPICAL CHARACTERISTICS

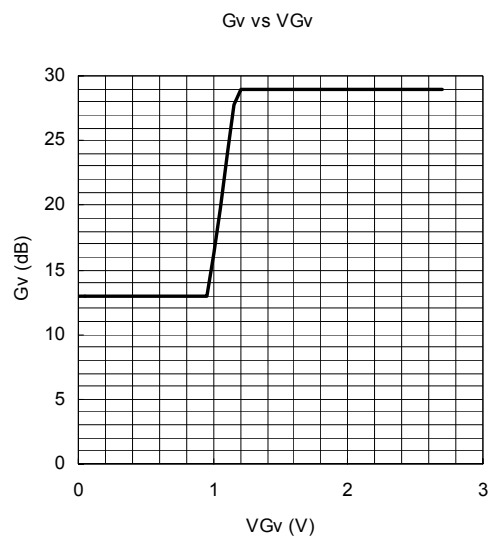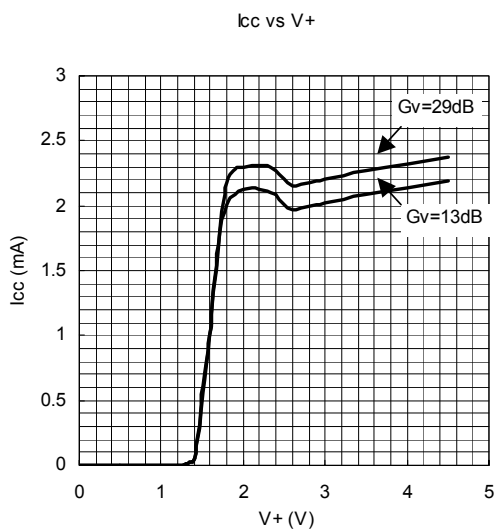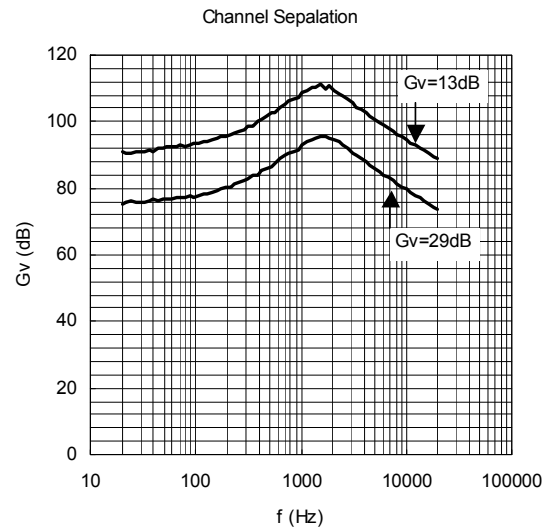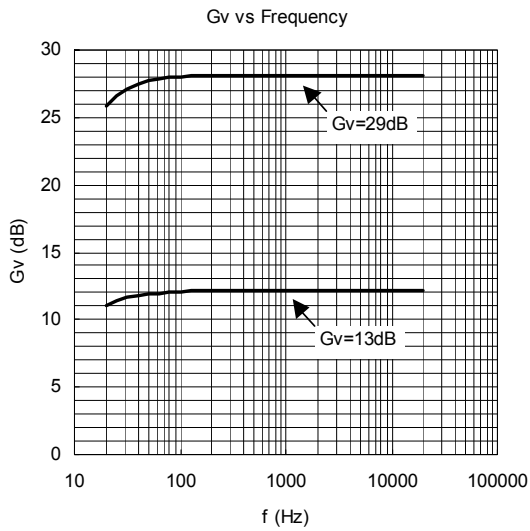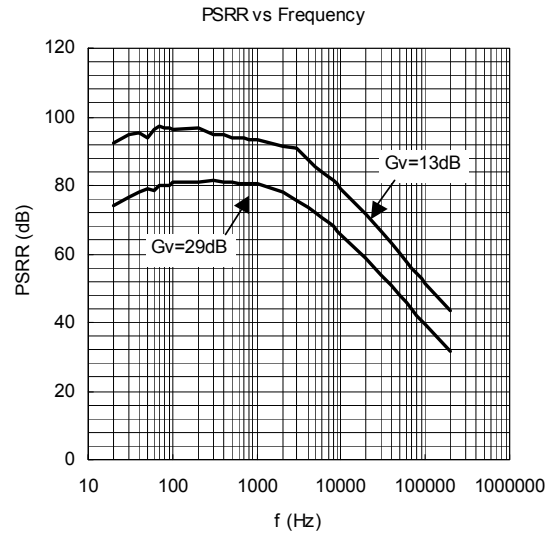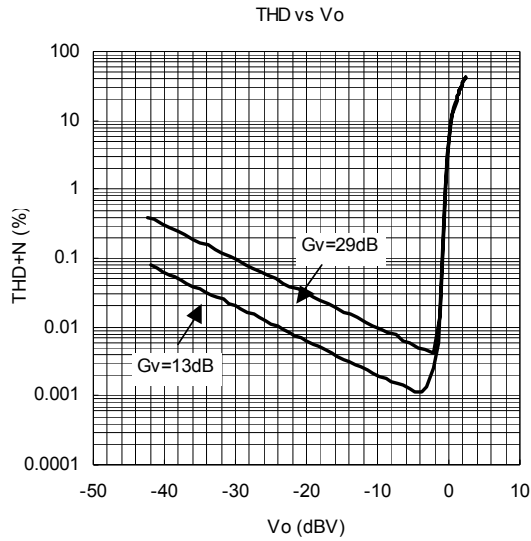


Vo vs Vin
(STBY)

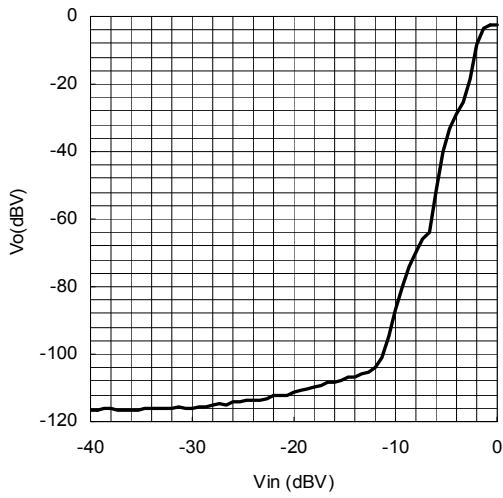


Icc vs VSTBY

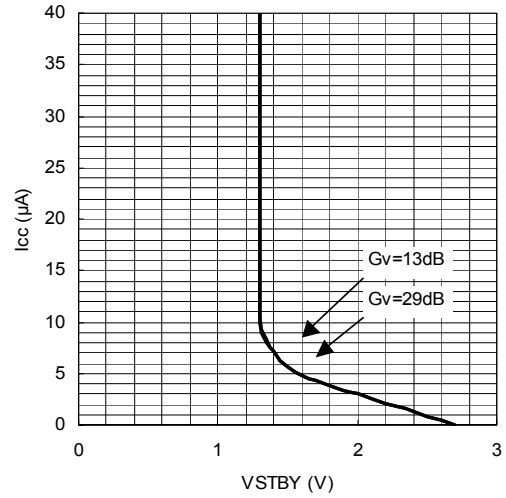


Gv vs VSTBY

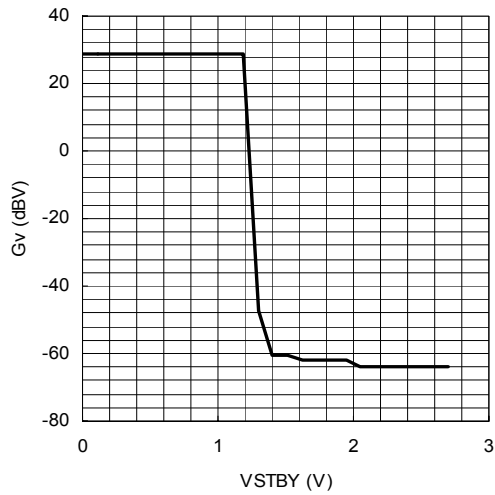


THD vs Vo

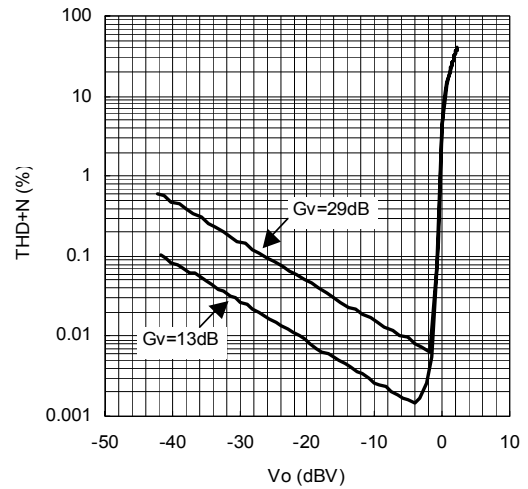


Icc2 vs Ta

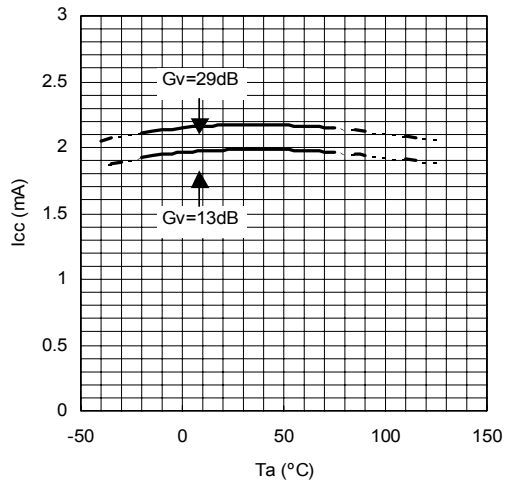

Gv vs Ta

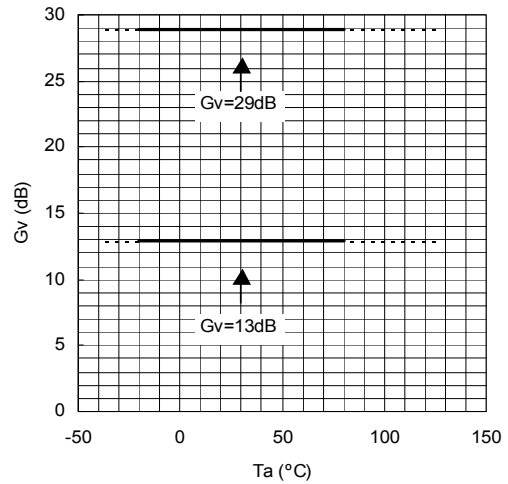

VREG vs Ta

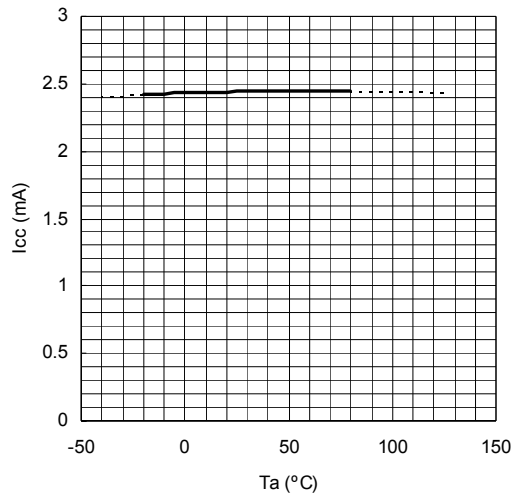

[CAUTION]
 The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.