

LP2950/LP2951

Series of Adjustable Micropower Voltage Regulators

General Description

The LP2950 and LP2951 are micropower voltage regulators with very low quiescent current (75µA typ.) and very low dropout voltage (typ. 40mV at light loads and 380mV at 100mA). They are ideally suited for use in battery-powered systems. Furthermore, the quiescent current of the LP2950/LP2951 increases only slightly in dropout, prolonging battery life.

The LP2950-5.0 is available in the surface-mount D-Pak package, and in the popular 3-pin TO-92 package for pin-compatibility with older 5V regulators. The 8-lead LP2951 is available in plastic, ceramic dual-in-line, LLP, or metal can packages and offers additional system functions.

One such feature is an error flag output which warns of a low output voltage, often due to falling batteries on the input. It may be used for a power-on reset. A second feature is the logic-compatible shutdown input which enables the regulator to be switched on and off. Also, the part may be pin-strapped for a 5V, 3V, or 3.3V output (depending on the version), or programmed from 1.24V to 29V with an external pair of resistors.

Careful design of the LP2950/LP2951 has minimized all contributions to the error budget. This includes a tight initial tolerance (.5% typ.), extremely good load and line regulation

(.05% typ.) and a very low output voltage temperature coefficient, making the part useful as a low-power voltage reference.



Features

- 5V, 3V, and 3.3V versions available
- High accuracy output voltage
- Guaranteed 100mA output current
- Extremely low quiescent current
- Low dropout voltage
- Extremely tight load and line regulation
- Very low temperature coefficient
- Use as Regulator or Reference
- Needs minimum capacitance for stability
- Current and Thermal Limiting
- Stable with low-ESR output capacitors (10mΩ to 6Ω)

LP2951 versions only


- Error flag warns of output dropout
- Logic-controlled electronic shutdown
- Output programmable from 1.24 to 29V

Block Diagram and Typical Applications

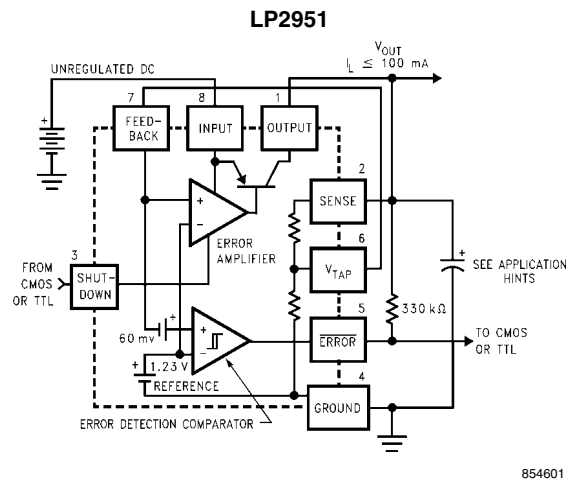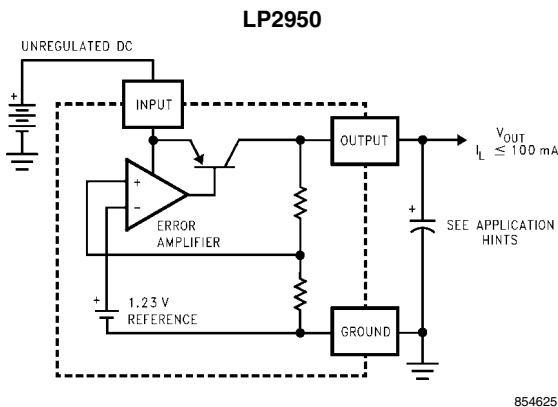

Connection Diagrams


TO-92 Plastic Package (Z)



Bottom View

854602


**Dual-In-Line Packages (N, J)
Surface-Mount Package (M, MM)**

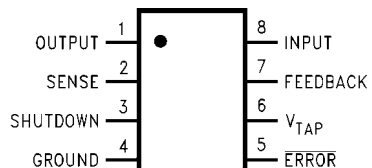

Top View

854626


Metal Can Package (H)

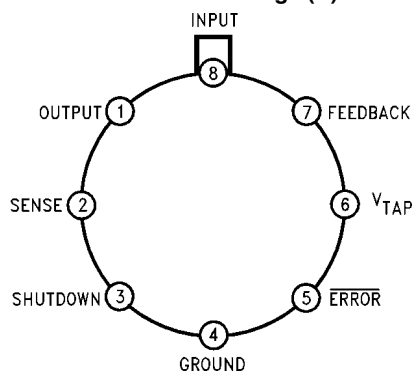

Top View

854619


10-Lead Ceramic Surface-Mount Package (WG)

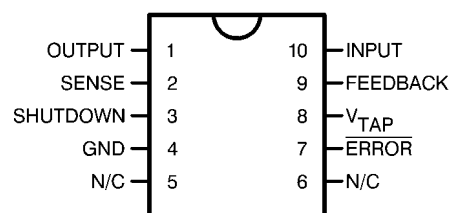

Top View

854664


TO-252 (D-Pak)

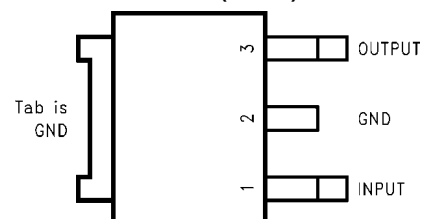

Front View

854670

8-Lead LLP

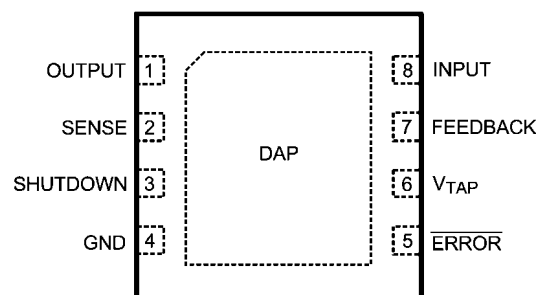

Connect DAP to GND at device pin 4.

Top View

854671

Ordering Information

| Package | Temperature Range | V _{OUT} | Part Number | Package Marking | Transport Media | NSC Drawing |
|-------------------|----------------------------|------------------|-----------------|-----------------------------|--------------------------|-------------|
| TO-92 (Z) | -40 < T _J < 125 | 3.0 | LP2950ACZ-3.0 | 2950A CZ3.0 | Bag | Z03A |
| | | | LP2950CZ-3.0 | 2950 CZ3.0 | Bag | |
| | | 3.3 | LP2950ACZ-3.3 | 2950A CZ3.3 | Bag | |
| | | | LP2950CZ-3.3 | 2950 CZ3.3 | Bag | |
| | | 5.0 | LP2950ACZ-5.0 | 2950A CZ5.0 | Bag | |
| | | | LP2950CZ-5.0 | 2950 CZ5.0 | Bag | |
| TO-252 (D-Pak) | -40 < T _J < 125 | 3.0 | LP2950CDT-3.0 | LP2950CDT-3.0 | 75 Units/Rail | TD03B |
| | | | LP2950CDTX-3.0 | | 2.5k Units Tape and Reel | |
| | | 3.3 | LP2950CDT-3.3 | LP2950CDT-3.3 | 75 Units/Rail | |
| | | | LP2950CDTX-3.3 | | 2.5k Units Tape and Reel | |
| | | 5.0 | LP2950CDT-5.0 | LP2950CDT-5.0 | 75 Units/Rail | |
| | | | LP2950CDTX-5.0 | | 2.5k Units Tape and Reel | |
| N (N-08E) | -40 < T _J < 125 | 3.0 | LP2951ACN-3.0 | LP2951ACN-3.0 | 40 Units/Rail | N08E |
| | | | LP2951CN-3.0 | LP2951CN-3.0 | 40 Units/Rail | |
| | | 3.3 | LP2951ACN-3.3 | LP2951ACN-3.3 | 40 Units/Rail | |
| | | | LP2951CN-3.3 | LP2951CN-3.3 | 40 Units/Rail | |
| | | 5.0 | LP2951ACN | LP2951ACN | 40 Units/Rail | |
| | | | LP2951CN | LP2951CN | 40 Units/Rail | |
| M (M08A) | -40 < T _J < 125 | 3.0 | LP2951ACM-3.0 | 2951ACM30* | 95 Units/Rail | M08A |
| | | | LP2951ACMX-3.0 | (where * is die rev letter) | 2.5k Units Tape and Reel | |
| | | | LP2951CM-3.0 | 2951CM30* | 95 Units/Rail | |
| | | | LP2951CMX-3.0 | (where * is die rev letter) | 2.5k Units Tape and Reel | |
| | | 3.3 | LP2951ACM-3.3 | 2951ACM33* | 95 Units/Rail | |
| | | | LP2951ACMX-3.3 | (where * is die rev letter) | 2.5k Units Tape and Reel | |
| | | | LP2951CM-3.3 | 2951CM33* | 95 Units/Rail | |
| | | | LP2951CMX-3.3 | (where * is die rev letter) | 2.5k Units Tape and Reel | |
| | | 5.0 | LP2951ACM | 2951ACM* | 95 Units/Rail | |
| | | | LP2951ACMX | (where * is die rev letter) | 2.5k Units Tape and Reel | |
| | | | LP2951CM | 2951CM* | 95 Units/Rail | |
| | | | LP2951CMX | (where * is die rev letter) | 2.5k Units Tape and Reel | |
| MM (MUA08A) | -40 < T _J < 125 | 3.0 | LP2951ACMM-3.0 | L0BA | 1k Units Tape and Reel | MUA08A |
| | | | LP2951ACMMX-3.0 | | 3.5k Units Tape and Reel | |
| | | | LP2951CMM-3.0 | L0BB | 1k Units Tape and Reel | |
| | | | LP2951CMMX-3.0 | | 3.5k Units Tape and Reel | |
| | | 3.3 | LP2951ACMM-3.3 | L0CA | 1k Units Tape and Reel | |
| | | | LP2951ACMMX-3.3 | | 3.5k Units Tape and Reel | |
| | | | LP2951CMM-3.3 | L0CB | 1k Units Tape and Reel | |
| | | | LP2951CMMX-3.3 | | 3.5k Units Tape and Reel | |
| | | 5.0 | LP2951ACMM | L0DA | 1k Units Tape and Reel | |
| | | | LP2951ACMMX | | 3.5k Units Tape and Reel | |
| | | | LP2951CMM | L0DB | 1k Units Tape and Reel | |
| | | | LP2951CMMX | | 3.5k Units Tape and Reel | |
| J (J08A) | -55 < T _J < 150 | 5.0 | LP2951J/883 | See MIL/AERO Datasheet | 40 Units/Rail | J08A |
| H (H08C) | -55 < T _J < 150 | 5.0 | LP2951H/883 | See MIL/AERO Datasheet | Tray | H08C |
| WG (WG10A) | -55 < T _J < 150 | 5.0 | LP2951WG/883 | See MIL/AERO Datasheet | Tray | WG10A |

| Package | Temperature Range | V _{OUT} | Part Number | Package Marking | Transport Media | NSC Drawing |
|------------|----------------------------|------------------|-----------------|-----------------|--------------------------|-------------|
| 8-lead LLP | -40 < T _J < 125 | 3.0 | LP2951ACSD-3.0 | 51AC30 | 1k Units Tape and Reel | SDC08A |
| | | | LP2951ACSDX-3.0 | | 4.5k Units Tape and Reel | |
| | | | LP2951CSD-3.0 | 51AC30B | 1k Units Tape and Reel | |
| | | | LP2951CSDX-3.0 | | 4.5k Units Tape and Reel | |
| | | 3.3 | LP2951ACSD-3.3 | 51AC33 | 1k Units Tape and Reel | |
| | | | LP2951ACSDX-3.3 | | 4.5k Units Tape and Reel | |
| | | | LP2951CSD-3.3 | 51AC33B | 1k Units Tape and Reel | |
| | | | LP2951CSDX-3.3 | | 4.5k Units Tape and Reel | |
| | | 5.0 | LP2951ACSD | 2951AC | 1k Units Tape and Reel | |
| | | | LP2951ACSDX | | 4.5k Units Tape and Reel | |
| | | | LP2951CSD | 2951ACB | 1k Units Tape and Reel | |
| | | | LP2951CSDX | | 4.5k Units Tape and Reel | |

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|---|--------------------|
| Input Supply Voltage | -0.3 to +30V |
| SHUTDOWN Input Voltage, Error Comparator Output Voltage, (Note 9) | |
| FEEDBACK Input Voltage (Notes 9, 10) | -1.5 to +30V |
| Power Dissipation | Internally Limited |
| Junction Temperature (T_J) | +150°C |
| Ambient Storage Temperature | -65° to +150°C |
| Soldering Dwell Time, Temperature | |
| Wave | 4 seconds, 260°C |
| Infrared | 10 seconds, 240°C |
| Vapor Phase | 75 seconds, 219°C |

ESD Rating

Human Body Model(Note 18)

2500V

Operating Ratings (Note 1)

| | |
|---|----------------|
| Maximum Input Supply Voltage | 30V |
| Junction Temperature Range (T_J) (Note 8) | |
| LP2951 | -55° to +150°C |
| LP2950AC-XX, LP2950C-XX, LP2951AC-XX, LP2951C-XX | -40° to +125°C |

Electrical Characteristics (Note 2)

| Parameter | Conditions (Note 2) | LP2951 | | LP2950AC-XX LP2951AC-XX | | | LP2950C-XX LP2951C-XX | | | Units |
|-------------------------|-------------------------------------|--------|----------------------------------|----------------------------|-----------------------------|------------------------------|--------------------------|-----------------------------|------------------------------|----------------|
| | | Typ | Tested Limit (Notes 3, 16) | Typ | Tested Limit (Note 3) | Design Limit (Note 4) | Typ | Tested Limit (Note 3) | Design Limit (Note 4) | |
| 3V Versions (Note 17) | | | | | | | | | | |
| Output Voltage | T _J = 25°C | 3.0 | 3.015 2.985 | 3.0 | 3.015 2.985 | | 3.0 | 3.030 2.970 | | V max V min |
| | –25°C ≤ T _J ≤ 85°C | 3.0 | | 3.0 | | 3.030 2.970 | 3.0 | | 3.045 2.955 | V max V min |
| | Full Operating Temperature Range | 3.0 | 3.036 2.964 | 3.0 | | 3.036 2.964 | 3.0 | | 3.060 2.940 | V max V min |
| Output Voltage | 100μA ≤ I _L ≤ 100mA | 3.0 | 3.045 | 3.0 | | 3.042 | 3.0 | | 3.072 | V max |
| | T _J ≤ T _{JMAX} | | 2.955 | | | 2.958 | | | 2.928 | V min |
| 3.3V Versions (Note 17) | | | | | | | | | | |
| Output Voltage | T _J = 25°C | 3.3 | 3.317 3.284 | 3.3 | 3.317 3.284 | | 3.3 | 3.333 3.267 | | V max V min |
| | –25°C ≤ T _J ≤ 85°C | 3.3 | | 3.3 | | 3.333 3.267 | 3.3 | | 3.350 3.251 | V max V min |
| | Full Operating Temperature Range | 3.3 | 3.340 3.260 | 3.3 | | 3.340 3.260 | 3.3 | | 3.366 3.234 | V max V min |
| Output Voltage | 100μA ≤ I _L ≤ 100mA | 3.3 | 3.350 | 3.3 | | 3.346 | 3.3 | | 3.379 | V max |
| | T _J ≤ T _{JMAX} | | 3.251 | | | 3.254 | | | 3.221 | V min |
| 5V Versions (Note 17) | | | | | | | | | | |
| Output Voltage | T _J = 25°C | 5.0 | 5.025 4.975 | 5.0 | 5.025 4.975 | | 5.0 | 5.05 4.95 | | V max V min |
| | –25°C ≤ T _J ≤ 85°C | 5.0 | | 5.0 | | 5.05 4.95 | 5.0 | | 5.075 4.925 | V max V min |
| | Full Operating Temperature Range | 5.0 | 5.06 4.94 | 5.0 | | 5.06 4.94 | 5.0 | | 5.1 4.9 | V max V min |
| Output Voltage | 100μA ≤ I _L ≤ 100mA | 5.0 | 5.075 | 5.0 | | 5.075 | 5.0 | | 5.12 | V max |
| | T _J ≤ T _{JMAX} | | 4.925 | | | 4.925 | | | 4.88 | V min |
| All Voltage Options | | | | | | | | | | |

| Parameter | Conditions (Note 2) | LP2951 | | LP2950AC-XX LP2951AC-XX | | | LP2950C-XX LP2951C-XX | | | Units |
|---|---|---------------|-------------------------------|----------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|----------------------------|
| | | Typ | Tested Limit (Notes 3, 16) | Typ | Tested Limit (Note 3) | Design Limit (Note 4) | Typ | Tested Limit (Note 3) | Design Limit (Note 4) | |
| Output Voltage Temperature Coefficient | (Note 12) | 20 | 120 | 20 | | 100 | 50 | | 150 | ppm/°C |
| Line Regulation (Note 14) | $(V_{O\text{NOM}} + 1)V \leq V_{in}$ $\leq 30V$ (Note 15) | 0.03 | 0.1 0.5 | 0.03 | 0.1 | 0.2 | 0.04 | 0.2 | 0.4 | % max % max |
| Load Regulation (Note 14) | $100\mu A \leq I_L \leq 100mA$ | 0.04 | 0.1 0.3 | 0.04 | 0.1 | 0.2 | 0.1 | 0.2 | 0.3 | % max % max |
| Dropout Voltage (Note 5) | $I_L = 100\mu A$ | 50 | 80 150 | 50 | 80 | 150 | 50 | 80 | 150 | mV max mV max |
| | $I_L = 100mA$ | 380 | 450 600 | 380 | 450 | 600 | 380 | 450 | 600 | mV max mV max |
| | | | | | | | | | | |
| Ground Current | $I_L = 100\mu A$ | 75 | 120 140 | 75 | 120 | 140 | 75 | 120 | 140 | μA max μA max |
| | $I_L = 100mA$ | 8 | 12 14 | 8 | 12 | 14 | 8 | 12 | 14 | mA max mA max |
| Dropout | $V_{in} = (V_{O\text{NOM}} - 0.5)V$ | 110 | 170 | 110 | 170 | | 110 | 170 | | μA max |
| Ground Current | $I_L = 100\mu A$ | | 200 | | | 200 | | | 200 | μA max |
| Current Limit | $V_{out} = 0$ | 160 | 200 220 | 160 | 200 | 220 | 160 | 200 | 220 | mA max mA max |
| Thermal Regulation | (Note 13) | 0.05 | 0.2 | 0.05 | 0.2 | | 0.05 | 0.2 | | %/W max |
| Output Noise, 10 Hz to 100 kHz | $C_L = 1\mu F$ (5V Only) | 430 | | 430 | | | 430 | | | μV rms |
| | $C_L = 200\mu F$ | 160 | | 160 | | | 160 | | | μV rms |
| | $C_L = 3.3\mu F$ (Bypass = 0.01 μF Pins 7 to 1 (LP2951)) | 100 | | 100 | | | 100 | | | μV rms |
| 8-pin Versions Only | | LP2951 | | LP2951AC-XX | | | LP2951C-XX | | | |
| Reference | | 1.23 5 | 1.25 | 1.23 5 | 1.25 | | 1.23 5 | 1.26 | | V max |
| Voltage | | | 1.26 | | | 1.26 | | | 1.27 | V max |
| | | | 1.22 | | 1.22 | | | 1.21 | | V min |
| | | | 1.2 | | | 1.2 | | | 1.2 | V min |
| Reference Voltage | (Note 7) | | 1.27 1.19 | | | 1.27 1.19 | | | 1.285 1.185 | V max V min |
| Feedback Pin Bias Current | | 20 | 40 60 | 20 | 40 | 60 | 20 | 40 | 60 | nA max nA max |
| Reference Voltage Temperature Coefficient | (Note 12) | 20 | | 20 | | | 50 | | | ppm/°C |
| Feedback Pin Bias Current Temperature Coefficient | | 0.1 | | 0.1 | | | 0.1 | | | nA/°C |
| Error Comparator | | | | | | | | | | |
| Output Leakage Current | $V_{OH} = 30V$ | 0.01 | 1 2 | 0.01 | 1 | 2 | 0.01 | 1 | 2 | μA max μA max |

| Parameter | Conditions (Note 2) | LP2951 | | LP2950AC-XX LP2951AC-XX | | | LP2950C-XX LP2951C-XX | | | Units |
|---|---|--------|----------------------------------|----------------------------|-----------------------------|-----------------------------|--------------------------|-----------------------------|-----------------------------|----------------------------|
| | | Typ | Tested Limit (Notes 3, 16) | Typ | Tested Limit (Note 3) | Design Limit (Note 4) | Typ | Tested Limit (Note 3) | Design Limit (Note 4) | |
| Output Low Voltage | $V_{in} = (V_{ONOM} - 0.5)$ V $I_{OL} = 400\mu A$ | 150 | 250 400 | 150 | 250 | 400 | 150 | 250 | 400 | mV max mV max |
| Upper Threshold Voltage | (Note 6) | 60 | 40 25 | 60 | 40 | 25 | 60 | 40 | 25 | mV min mV min |
| Lower Threshold Voltage | (Note 6) | 75 | 95 140 | 75 | 95 | 140 | 75 | 95 | 140 | mV max mV max |
| Hysteresis | (Note 6) | 15 | | 15 | | | 15 | | | mV |
| Shutdown Input | | | | | | | | | | |
| Input Logic Voltage | Low (Regulator ON) High (Regulator OFF) | 1.3 | 0.6 2.0 | 1.3 | | 0.7 2.0 | 1.3 | | 0.7 2.0 | V V max V min |
| Shutdown Pin Input Current | $V_{shutdown} = 2.4V$ | 30 | 50 100 | 30 | 50 | 100 | 30 | 50 | 100 | μA max μA max |
| | $V_{shutdown} = 30V$ | 450 | 600 750 | 450 | 600 | 750 | 450 | 600 | 750 | μA max μA max |
| Regulator Output Current in Shutdown | (Note 11) | 3 | 10 20 | 3 | 10 | 20 | 3 | 10 | 20 | μA max μA max |

Note 1: Absolute Maximum Ratings are limits beyond which damage to the device may occur. Operating Ratings are conditions under which operation of the device is guaranteed. Operating Ratings do not imply guaranteed performance limits. For guaranteed performance limits and associated test conditions, see the Electrical Characteristics tables.

Note 2: Unless otherwise specified all limits guaranteed for $V_{IN} = (V_{ONOM} + 1)V$, $I_L = 100\mu A$ and $C_L = 1\mu F$ for 5V versions and $2.2\mu F$ for 3V and 3.3V versions. Limits appearing in **boldface** type apply over the entire junction temperature range for operation. Limits appearing in normal type apply for $T_A = T_J = 25^\circ C$. Additional conditions for the 8-pin versions are FEEDBACK tied to V_{TAP} , OUTPUT tied to SENSE, and $V_{SHUTDOWN} \leq 0.8V$.

Note 3: Guaranteed and 100% production tested.

Note 4: Guaranteed but not 100% production tested. These limits are not used to calculate outgoing AQL levels.

Note 5: Dropout Voltage is defined as the input to output differential at which the output voltage drops 100 mV below its nominal value measured at 1V differential. At very low values of programmed output voltage, the minimum input supply voltage of 2V (2.3V over temperature) must be taken into account.

Note 6: Comparator thresholds are expressed in terms of a voltage differential at the Feedback terminal below the nominal reference voltage measured at $V_{in} = (V_{ONOM} + 1)V$. To express these thresholds in terms of output voltage change, multiply by the error amplifier gain $= V_{out}/V_{ref} = (R1 + R2)/R2$. For example, at a programmed output voltage of 5V, the Error output is guaranteed to go low when the output drops by $95mV \times 5V/1.235V = 384 mV$. Thresholds remain constant as a percent of V_{out} as V_{out} is varied, with the dropout warning occurring at typically 5% below nominal, 7.5% guaranteed.

Note 7: $V_{ref} \leq V_{out} \leq (V_{in} - 1V)$, $2.3V \leq V_{in} \leq 30V$, $100\mu A \leq I_L \leq 100mA$, $T_J \leq T_{JMAX}$.

Note 8: The junction-to-ambient thermal resistances are as follows: $180^\circ C/W$ and $160^\circ C/W$ for the TO-92 package with 0.40 inch and 0.25 inch leads to the printed circuit board (PCB) respectively, $105^\circ C/W$ for the molded plastic DIP (N), $130^\circ C/W$ for the ceramic DIP (J), $160^\circ C/W$ for the molded plastic SOP (M), $200^\circ C/W$ for the molded plastic MSOP (MM), and $160^\circ C/W$ for the metal can package (H). The above thermal resistances for the N, J, M, and MM packages apply when the package is soldered directly to the PCB. Junction-to-case thermal resistance for the H package is $20^\circ C/W$. Junction-to-case thermal resistance for the TO-252 package is $5.4^\circ C/W$. The value of θ_{JA} for the LLP package is typically $51^\circ C/W$ but is dependent on the PCB trace area, trace material, and the number of layers and thermal vias. For details of thermal resistance and power dissipation for the LLP package, refer to Application Note AN-1187.

Note 9: May exceed input supply voltage.

Note 10: When used in dual-supply systems where the output terminal sees loads returned to a negative supply, the output voltage should be diode-clamped to ground.

Note 11: $V_{shutdown} \geq 2V$, $V_{in} \leq 30V$, $V_{out} = 0$, Feedback pin tied to V_{TAP} .

Note 12: Output or reference voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.

Note 13: Thermal regulation is defined as the change in output voltage at a time T after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a 50mA load pulse at $V_{IN} = 30V$ (1.25W pulse) for $T = 10ms$.

Note 14: Regulation is measured at constant junction temperature, using pulse testing with a low duty cycle. Changes in output voltage due to heating effects are covered under the specification for thermal regulation.


Note 15: Line regulation for the LP2951 is tested at $150^\circ C$ for $I_L = 1mA$. For $I_L = 100\mu A$ and $T_J = 125^\circ C$, line regulation is guaranteed by design to 0.2%. See Typical Performance Characteristics for line regulation versus temperature and load current.

Note 16: A Military RETS specification is available on request. At time of printing, the LP2951 RETS specification complied with the boldface limits in this column. The LP2951H, WG, or J may also be procured as Standard Military Drawing Spec #5962-3870501MGA, MXA, or MPA.


Note 17: All LP2950 devices have the nominal output voltage coded as the last two digits of the part number. In the LP2951 products, the 3.0V and 3.3V versions are designated by the last two digits, but the 5V version is denoted with no code at this location of the part number (refer to ordering information table).

Note 18: Human Body Model 1.5k Ω in series with 100pF.


Typical Performance Characteristics

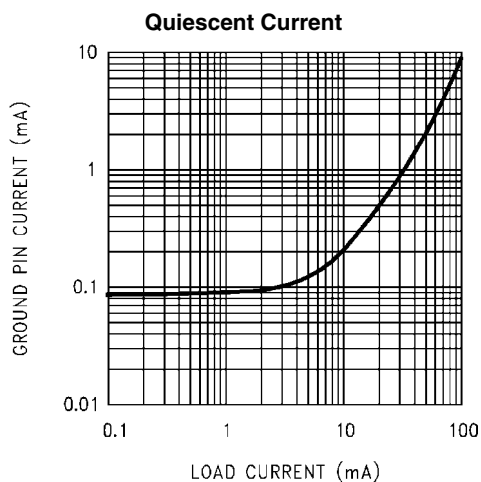


854627

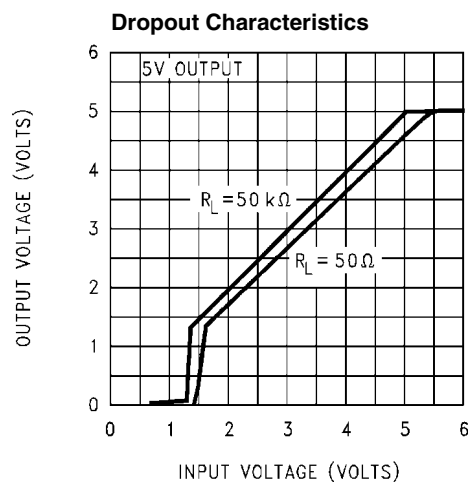


854628

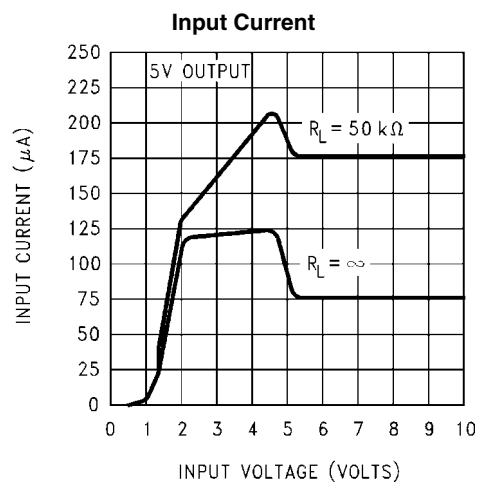


854629

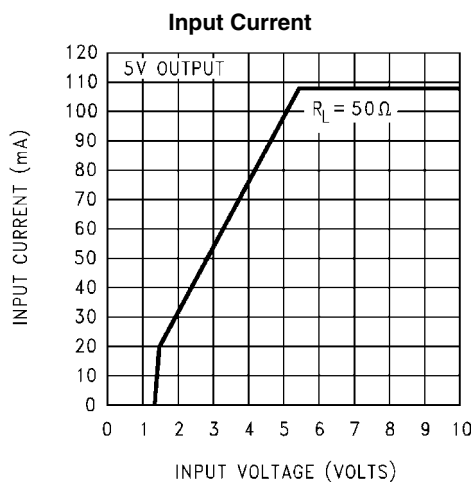


854630

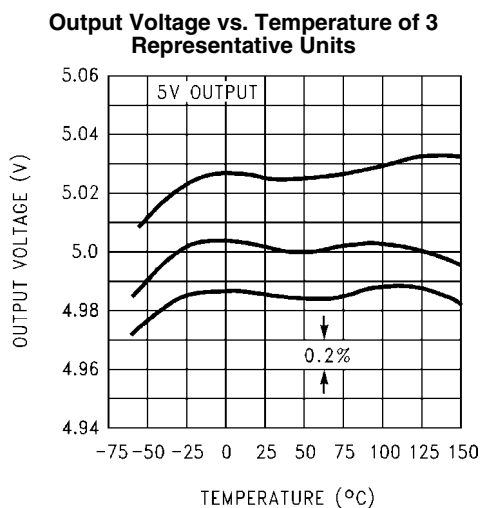


854631

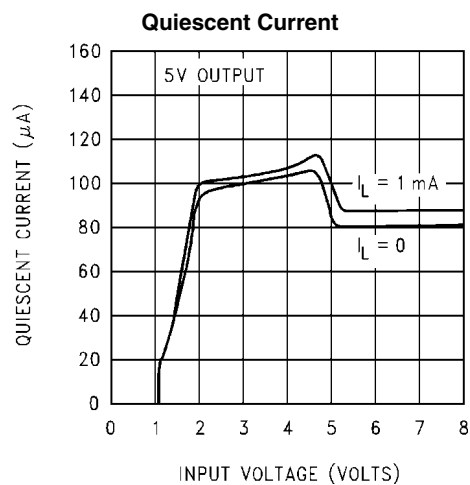


854632

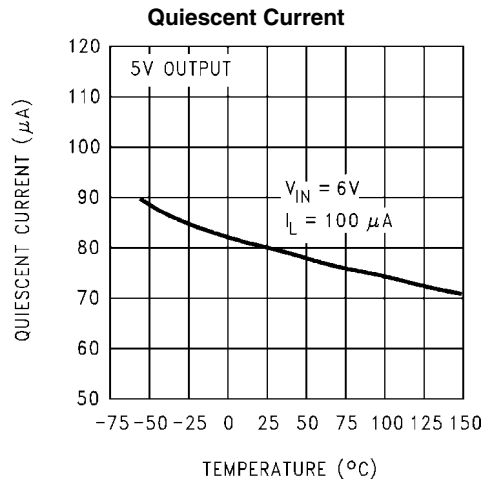


854633

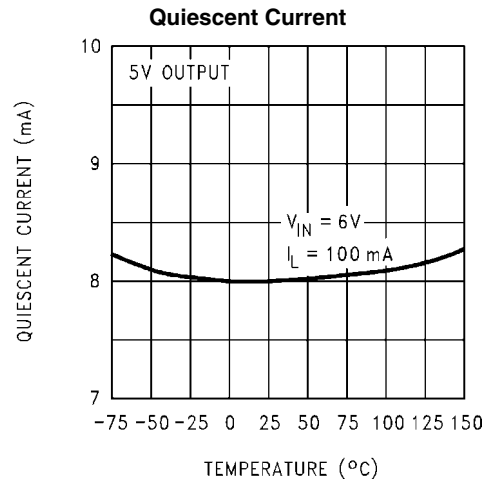


854634

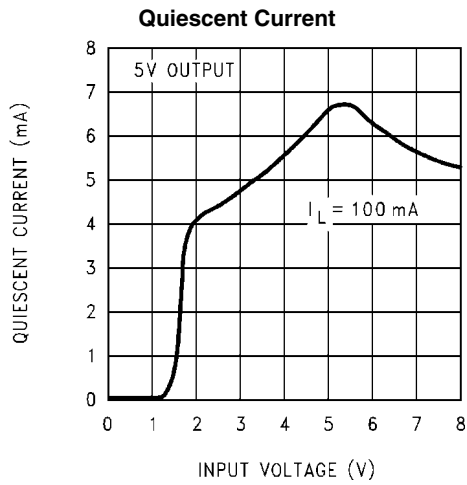


854635

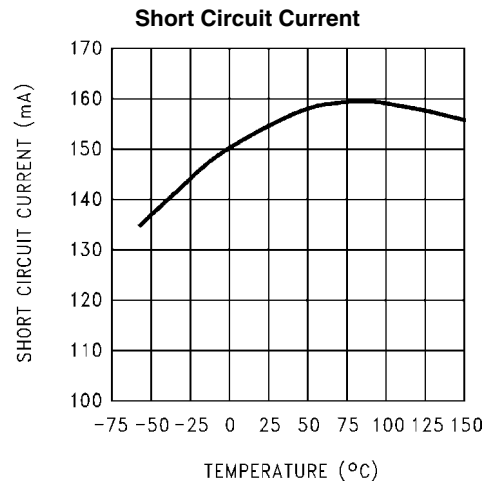

854636

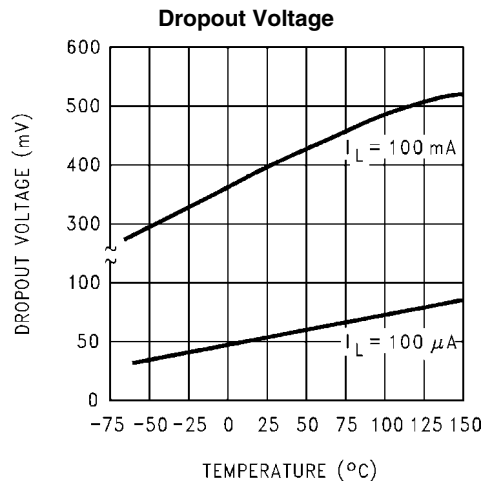


854637

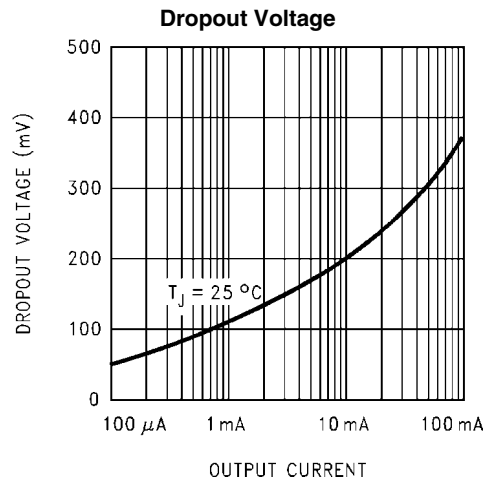


854638

LP2951 Minimum Operating Voltage

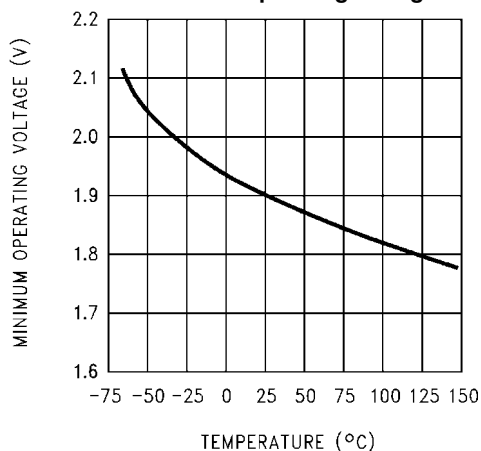


854639

LP2951 Feedback Bias Current

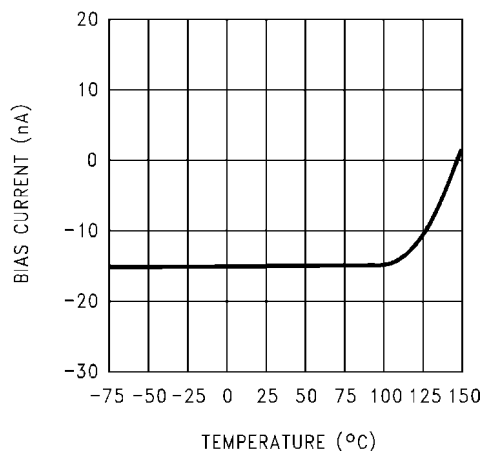


854640

LP2951 Feedback Pin Current

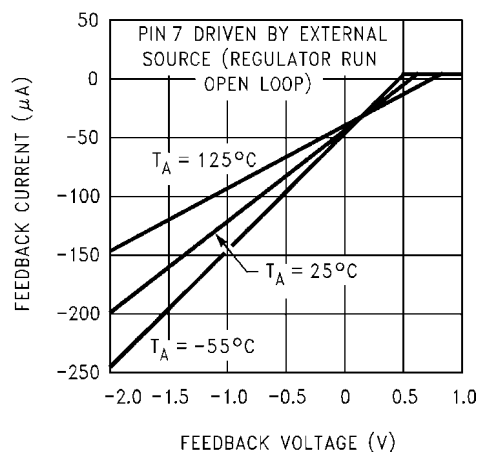


854641

LP2951 Error Comparator Output

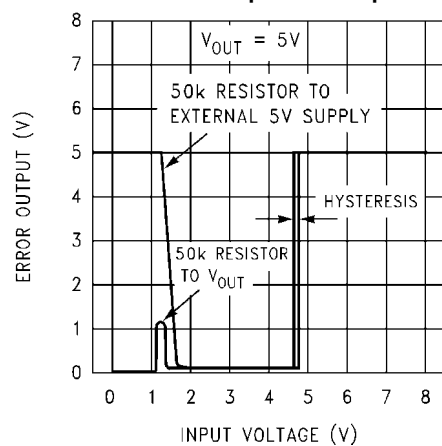


854642

LP2951 Comparator Sink Current

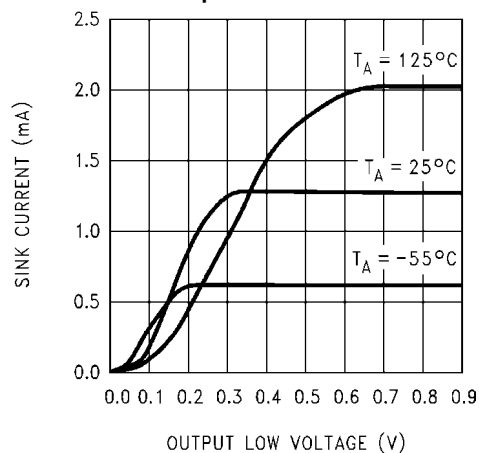


854643


Line Transient Response

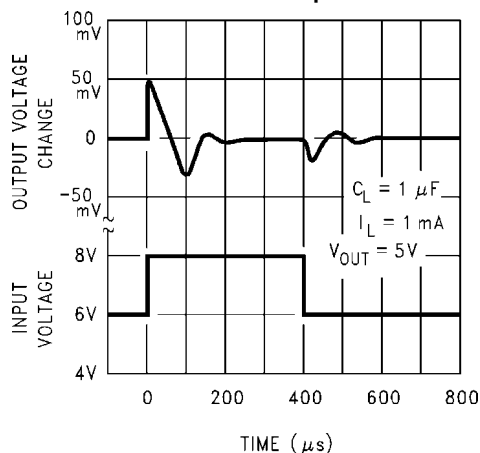


854644

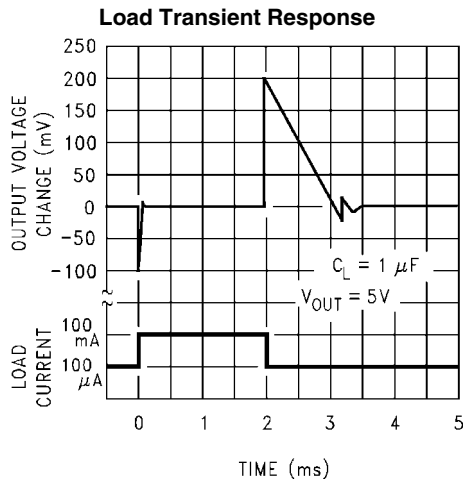


854645

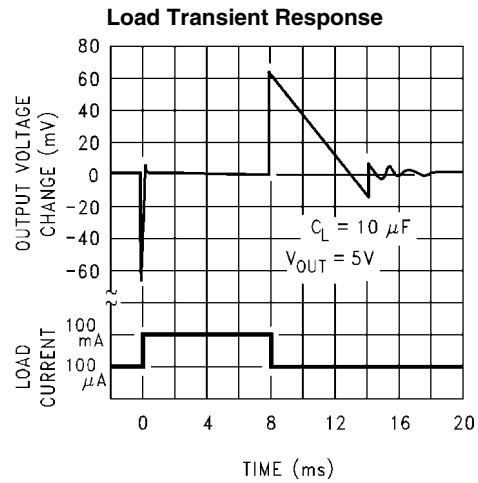


854646

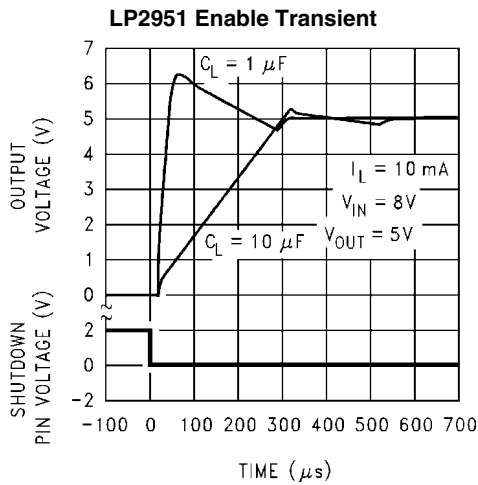


854647

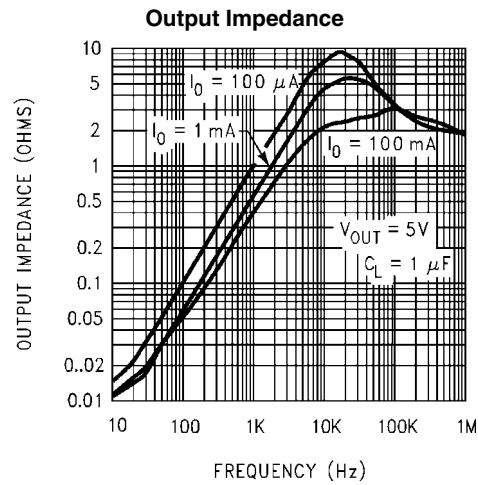







854648

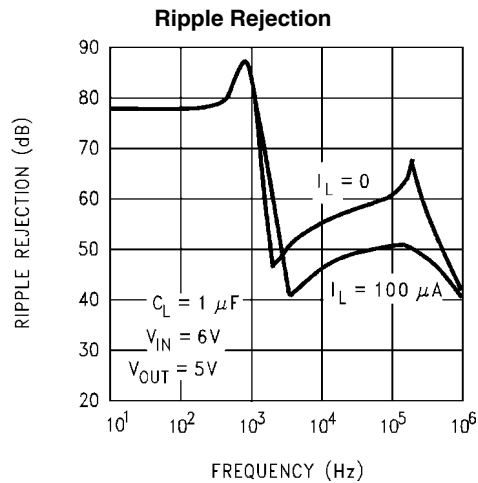


854649

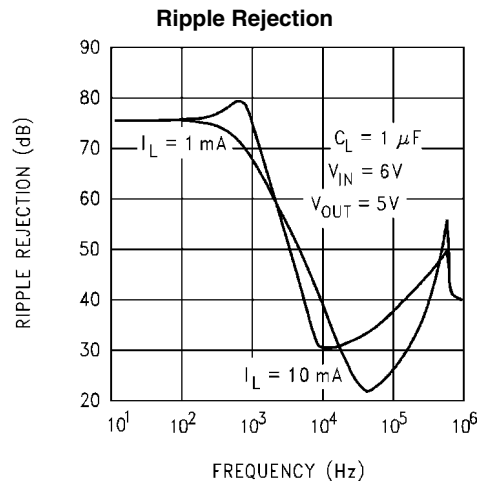

854650

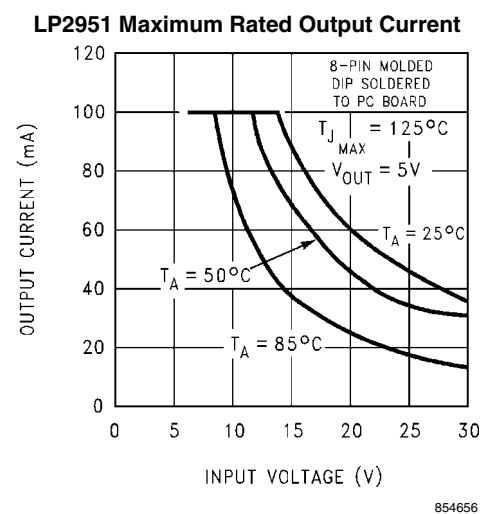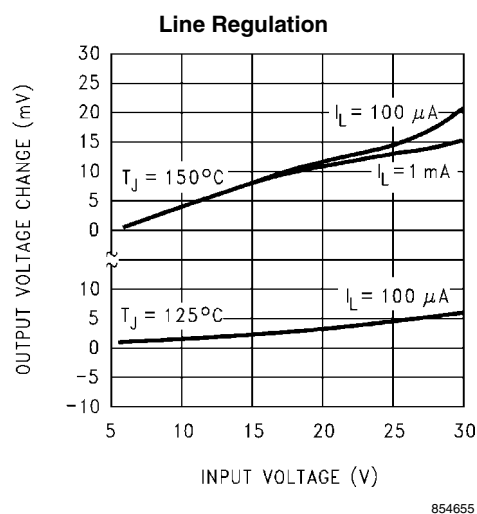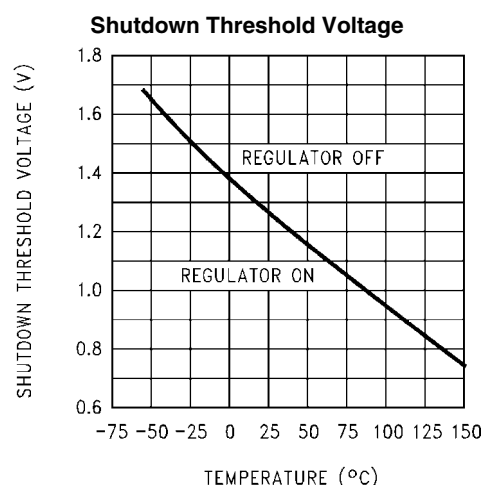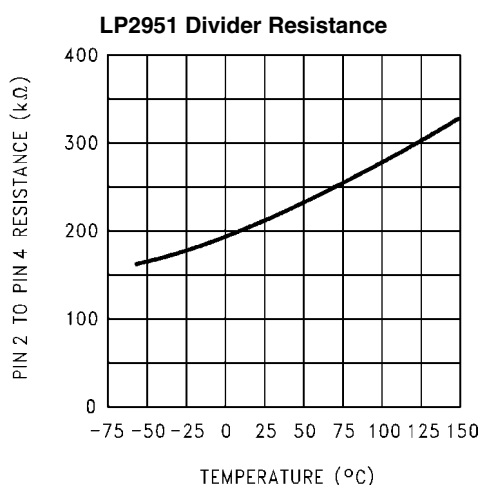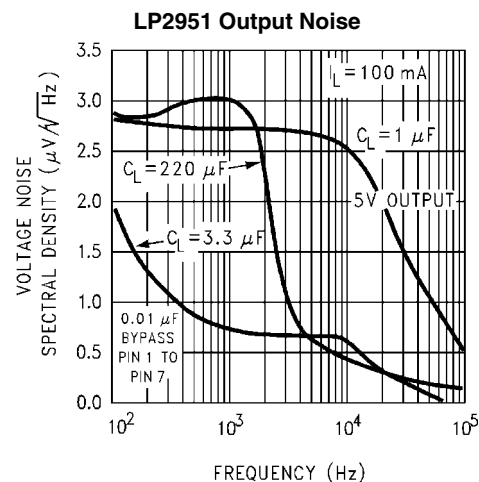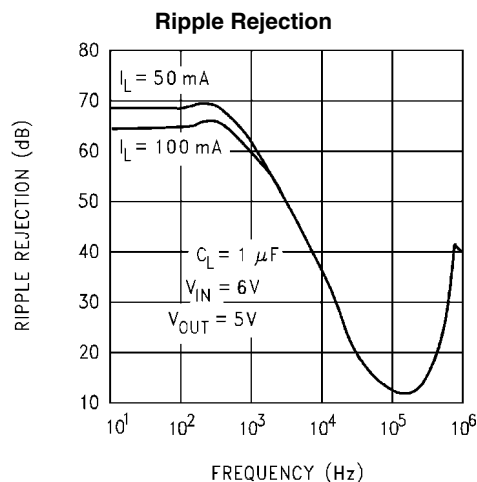


LP2950 Maximum Rated Output Current

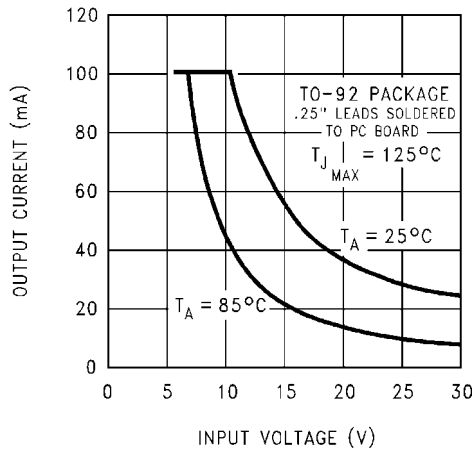


854657

Thermal Response

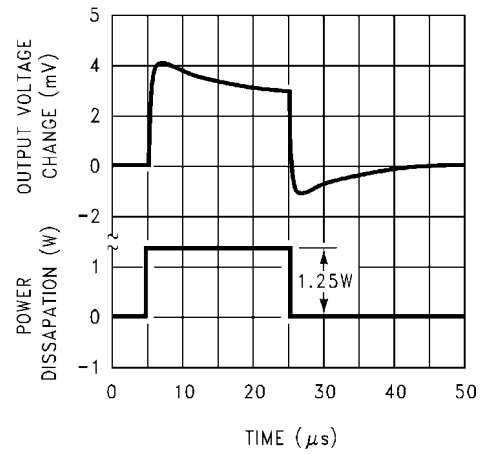

854658

Output Capacitor ESR Range

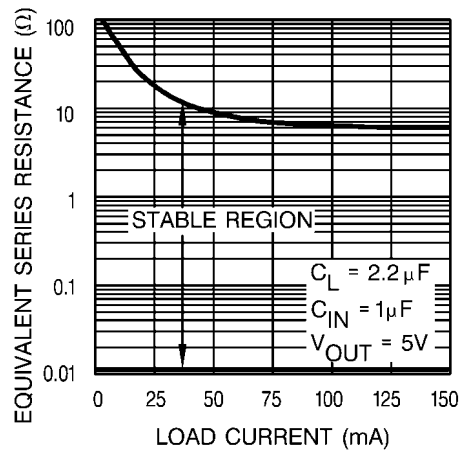

854663

Application Hints

EXTERNAL CAPACITORS

A 1.0 μ F (or greater) capacitor is required between the output and ground for stability at output voltages of 5V or more. At lower output voltages, more capacitance is required (2.2 μ F or more is recommended for 3V and 3.3V versions). Without this capacitor the part will oscillate. Most types of tantalum or aluminum electrolytics work fine here; even film types work but are not recommended for reasons of cost. Many aluminum electrolytics have electrolytes that freeze at about -30°C , so solid tantalums are recommended for operation below -25°C . The important parameters of the capacitor are an ESR of about 5 Ω or less and a resonant frequency above 500kHz. The value of this capacitor may be increased without limit.

Ceramic capacitors whose value is greater than 1000pF should not be connected directly from the LP2951 output to ground. Ceramic capacitors typically have ESR values in the range of 5 to 10m Ω , a value below the lower limit for stable operation (see curve Output Capacitor ESR Range).

The reason for the lower ESR limit is that the loop compensation of the part relies on the ESR of the output capacitor to provide the zero that gives added phase lead. The ESR of ceramic capacitors is so low that this phase lead does not occur, significantly reducing phase margin. A ceramic output capacitor can be used if a series resistance is added (recommended value of resistance about 0.1 Ω to 2 Ω).

At lower values of output current, less output capacitance is required for stability. The capacitor can be reduced to 0.33 μ F for currents below 10mA or 0.1 μ F for currents below 1mA. Using the adjustable versions at voltages below 5V runs the error amplifier at lower gains so that *more* output capacitance is needed. For the worst-case situation of a 100mA load at 1.23V output (Output shorted to Feedback) a 3.3 μ F (or greater) capacitor should be used.

Unlike many other regulators, the LP2950 will remain stable and in regulation with no load in addition to the internal voltage divider. This is especially important in CMOS RAM keep-alive applications. When setting the output voltage of the LP2951 versions with external resistors, a minimum load of 1 μ A is recommended.

A 1 μ F tantalum, ceramic or aluminum electrolytic capacitor should be placed from the LP2950/LP2951 input to ground if there is more than 10 inches of wire between the input and the AC filter capacitor or if a battery is used as the input.

Stray capacitance to the LP2951 Feedback terminal can cause instability. This may especially be a problem when using high value external resistors to set the output voltage. Adding a 100pF capacitor between Output and Feedback and increasing the output capacitor to at least 3.3 μ F will fix this problem.


ERROR DETECTION COMPARATOR OUTPUT

The comparator produces a logic low output whenever the LP2951 output falls out of regulation by more than approximately 5%. This figure is the comparator's built-in offset of about 60mV divided by the 1.235 reference voltage. (Refer to the block diagram in the front of the datasheet.) This trip level remains "5% below normal" regardless of the programmed output voltage of the 2951. For example, the error flag trip level is typically 4.75V for a 5V output or 11.4V for a 12V output. The out of regulation condition may be due either to low input voltage, current limiting, or thermal limiting.

Figure 1 below gives a timing diagram depicting the $\overline{\text{ERROR}}$ signal and the regulated output voltage as the LP2951

input is ramped up and down. For 5V versions, the $\overline{\text{ERROR}}$ signal becomes valid (low) at about 1.3V input. It goes high at about 5V input (the input voltage at which $V_{\text{OUT}} = 4.75\text{V}$). Since the LP2951's dropout voltage is load-dependent (see curve in typical performance characteristics), the **input** voltage trip point (about 5V) will vary with the load current. The **output** voltage trip point (approx. 4.75V) does not vary with load.

The error comparator has an open-collector output which requires an external pull up resistor. This resistor may be returned to the output or some other supply voltage depending on system requirements. In determining a value for this resistor, note that while the output is rated to sink 400 μ A, this sink current adds to battery drain in a low battery condition. Suggested values range from 100k to 1 M Ω . The resistor is not required if this output is unused.

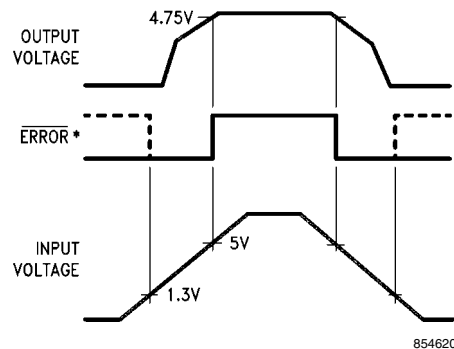

*When $V_{\text{IN}} \leq 1.3\text{V}$, the error flag pin becomes a high impedance, and the error flag voltage rises to its pull-up voltage. Using V_{OUT} as the pull-up voltage (see Figure 2), rather than an external 5V source, will keep the error flag voltage under 1.2V (typ.) in this condition. The user may wish to divide down the error flag voltage using equal-value resistors (10k Ω suggested), to ensure a low-level logic signal during any fault condition, while still allowing a valid high logic level during normal operation.

FIGURE 1. $\overline{\text{ERROR}}$ Output Timing


PROGRAMMING THE OUTPUT VOLTAGE (LP2951)

The LP2951 may be pin-strapped for the nominal fixed output voltage using its internal voltage divider by tying the output and sense pins together, and also tying the feedback and V_{TAP} pins together. Alternatively, it may be programmed for any output voltage between its 1.235V reference and its 30V maximum rating. As seen in Figure 2, an external pair of resistors is required.

The complete equation for the output voltage is

$$V_{\text{OUT}} = V_{\text{REF}} \cdot \left(1 + \frac{R_1}{R_2} \right) + I_{\text{FB}} R_1$$

where V_{REF} is the nominal 1.235 reference voltage and I_{FB} is the feedback pin bias current, nominally -20nA . The minimum recommended load current of 1 μ A forces an upper limit of 1.2 M Ω on the value of R_2 , if the regulator must work with no load (a condition often found in CMOS in standby). I_{FB} will produce a 2% typical error in V_{OUT} which may be eliminated at room temperature by trimming R_1 . For better accuracy, choosing $R_2 = 100\text{k}$ reduces this error to 0.17% while increasing the resistor program current to 12 μ A. Since the LP2951 typically draws 60 μ A at no load with Pin 2 open-circuited, this is a small price to pay.

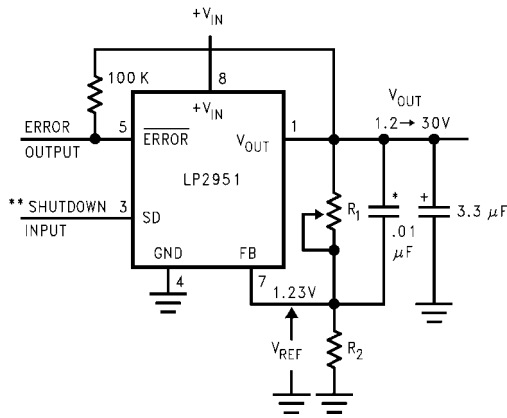

854607

*See Application Hints

$$V_{out} = V_{Ref} \left(1 + \frac{R_1}{R_2} \right)$$

**Drive with TTL-high to shut down. Ground or leave open if shutdown feature is not to be used.

Note: Pins 2 and 6 are left open.

FIGURE 2. Adjustable Regulator

REDUCING OUTPUT NOISE


In reference applications it may be advantageous to reduce the AC noise present at the output. One method is to reduce the regulator bandwidth by increasing the size of the output capacitor. This is the only way noise can be reduced on the 3 lead LP2950 but is relatively inefficient, as increasing the capacitor from 1μF to 220μF only decreases the noise from 430μV to 160μV rms for a 100kHz bandwidth at 5V output.

Noise can be reduced fourfold by a bypass capacitor across R_1 , since it reduces the high frequency gain from 4 to unity. Pick


$$C_{BYPASS} \cong \frac{1}{2\pi R_1 \cdot 200 \text{ Hz}}$$

or about 0.01μF. When doing this, the output capacitor must be increased to 3.3μF to maintain stability. These changes reduce the output noise from 430μV to 100μV rms for a 100kHz bandwidth at 5V output. With the bypass capacitor added, noise no longer scales with output voltage so that improvements are more dramatic at higher output voltages.

Typical Applications

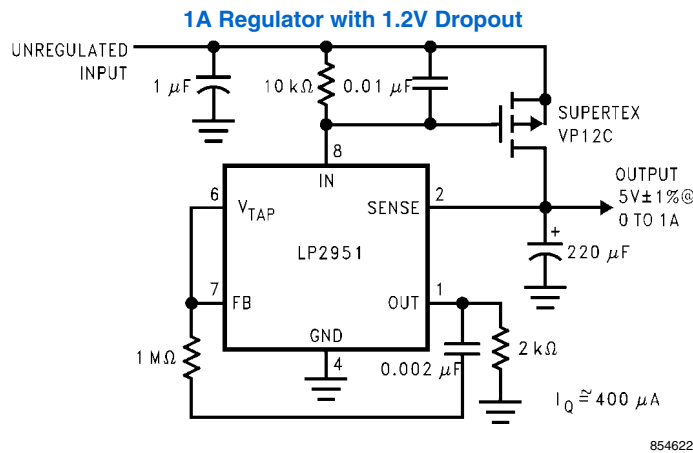


854622

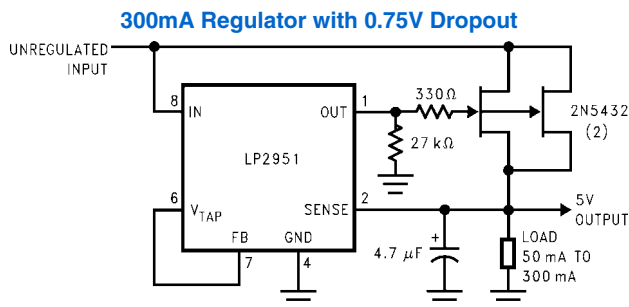

854621


Wide Input Voltage Range Current Limiter

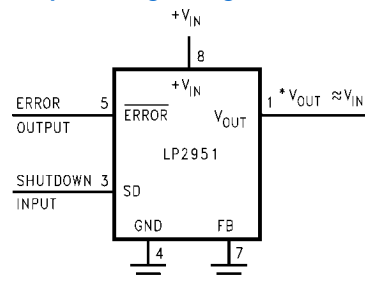

854609


*Minimum input-output voltage ranges from 40mV to 400mV, depending on load current. Current limit is typically 160mA.

Low Drift Current Source

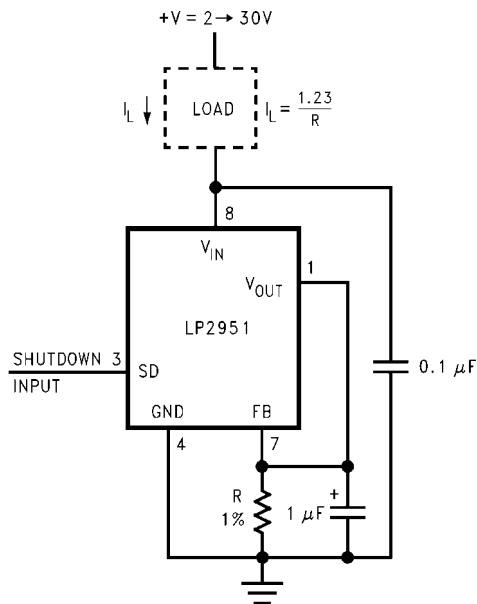

854608


5 Volt Current Limiter



854610


*Minimum input-output voltage ranges from 40mV to 400mV, depending on load current. Current limit is typically 160mA.

Regulator with Early Warning and Auxiliary Output

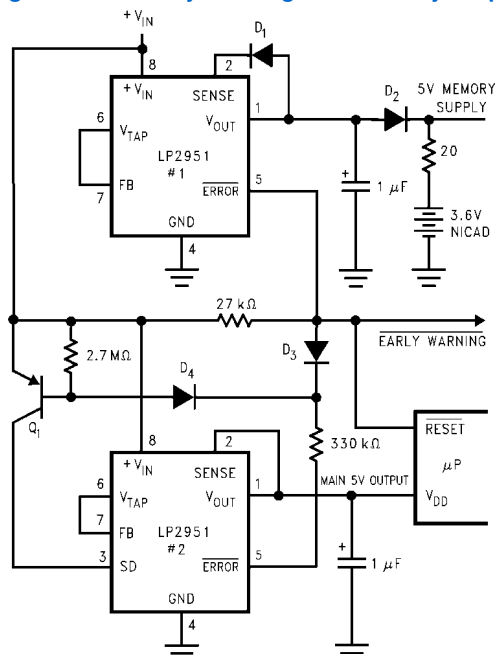

854611


Latch Off When Error Flag Occurs

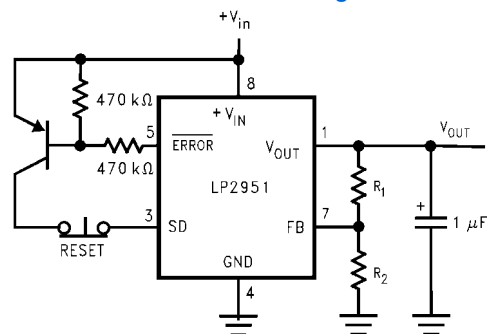

854612

- Early warning flag on low input voltage
- Main output latches off at lower input voltages
- Battery backup on auxiliary output
- Operation: Reg. #1's V_{out} is programmed one diode drop above 5V. Its error flag becomes active when $V_{in} \leq 5.7V$. When V_{in} drops below 5.3V, the error flag of Reg. #2 becomes active and via Q1 latches the main output off. When V_{in} again exceeds 5.7V Reg. #1 is back in regulation and the early warning signal rises, unlatching Reg. #2 via D3.


2 Ampere Low Dropout Regulator

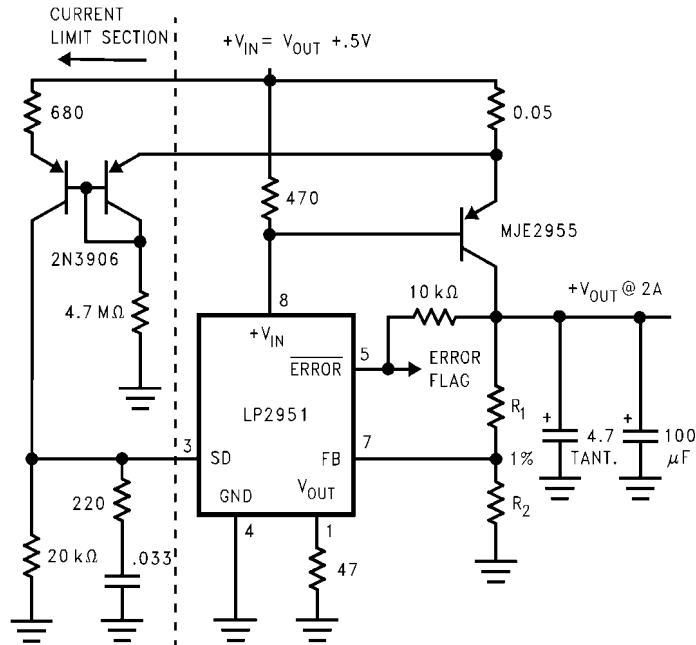

$$V_{out} = 1.23V \left(1 + \frac{R_1}{R_2} \right)$$


For 5V_{out}, use internal resistors. Wire pin 6 to 7, & wire pin 2 to +V_{out} Bus.

5V Regulator with 2.5V Sleep Function

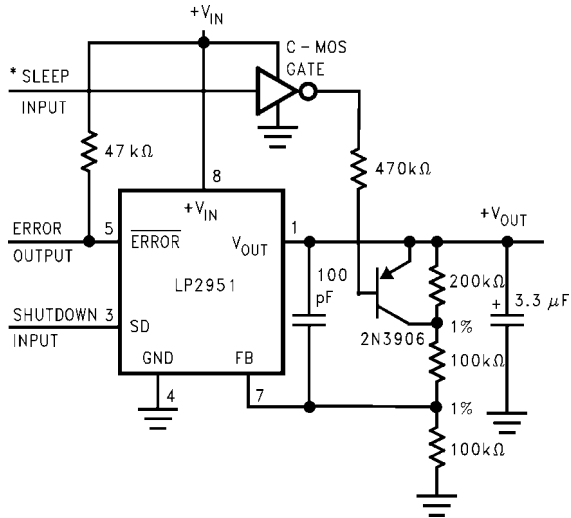


*High input lowers V_{out} to 2.5V

Open Circuit Detector for 4 → 20mA Current Loop

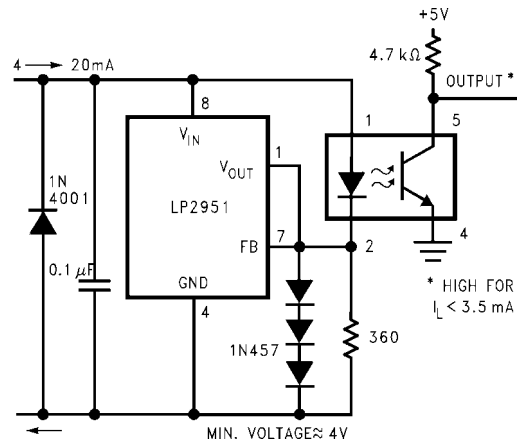

Regulator with State-of-Charge Indicator

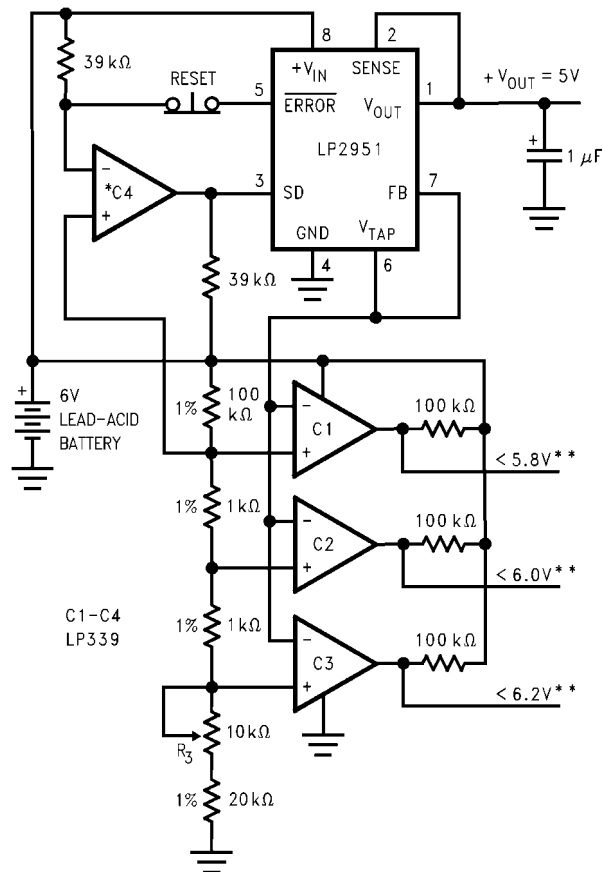


854616

*Optional Latch off when drop out occurs. Adjust R3 for C2 Switching when V_{in} is 6.0V.

**Outputs go low when V_{in} drops below designated thresholds.

Low Battery Disconnect

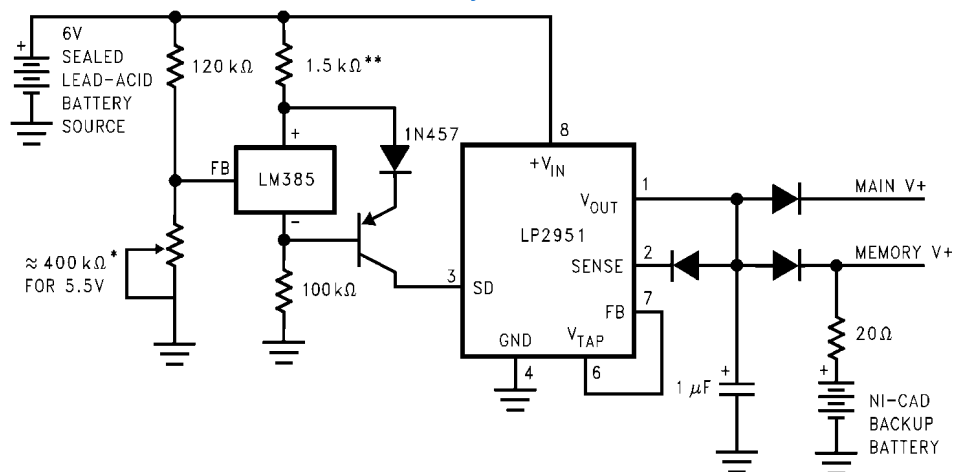


854617

For values shown, Regulator shuts down when $V_{in} < 5.5V$ and turns on again at 6.0V. Current drain in disconnected mode is $\approx 150\mu A$.

*Sets disconnect Voltage

**Sets disconnect Hysteresis


System Overtemperature Protection Circuit

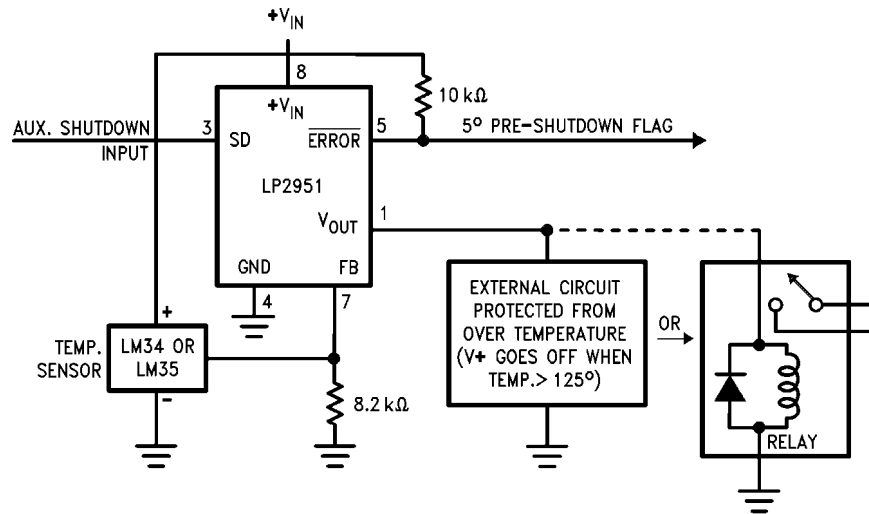

854618


LM34 for 125°F Shutdown
 LM35 for 125°C Shutdown

Schematic Diagram

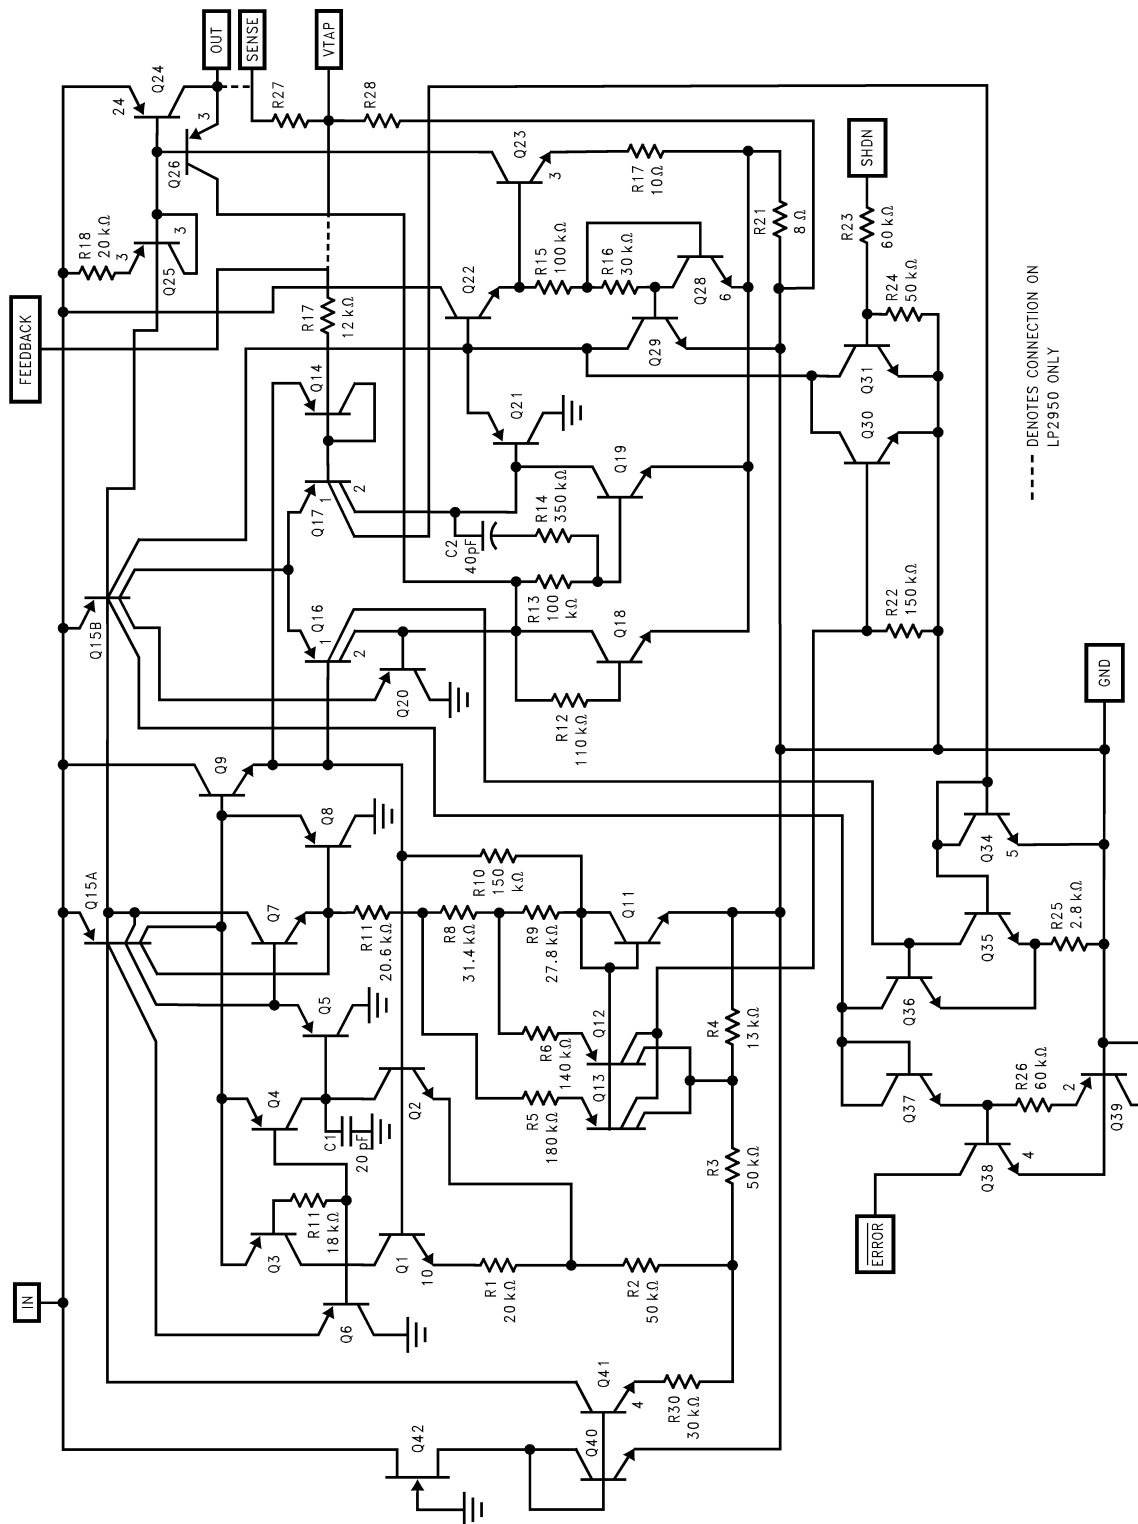


854623


Physical Dimensions inches (millimeters) unless otherwise noted

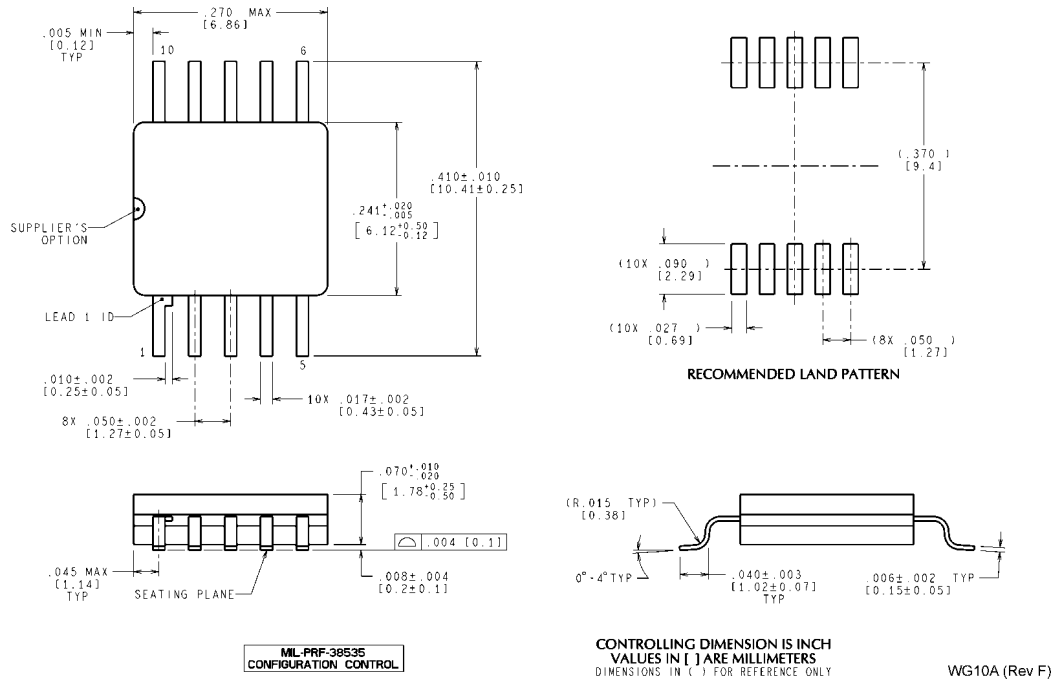


Order Number LP2951WG/883
NS Package Number WG10A

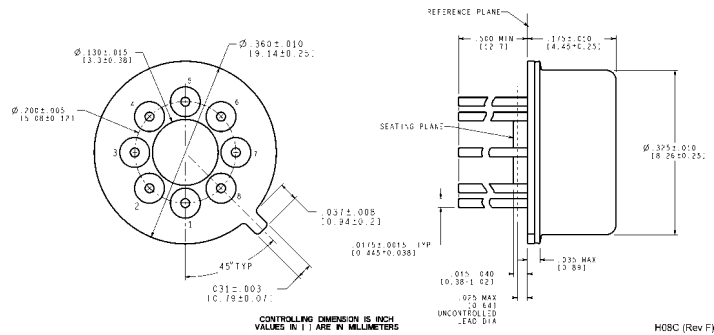



Metal Can Package (H)
NS Package Number H08C

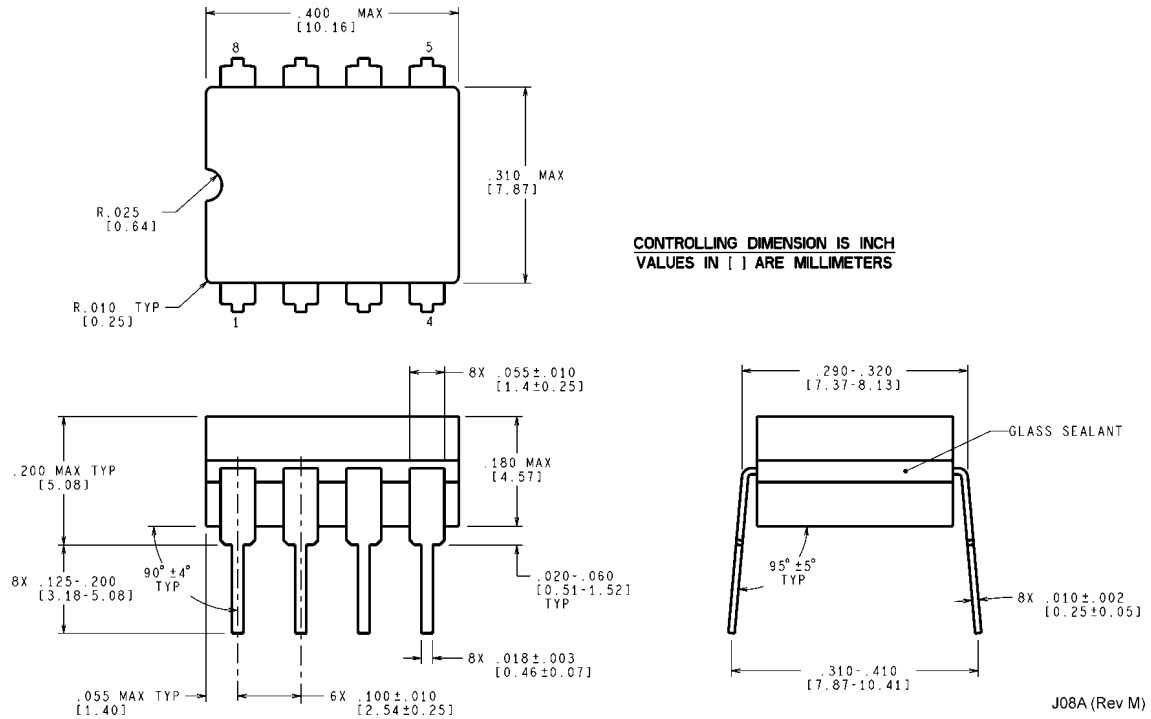


Ceramic Dual-In-Line Package (J)
NS Package Number J08A

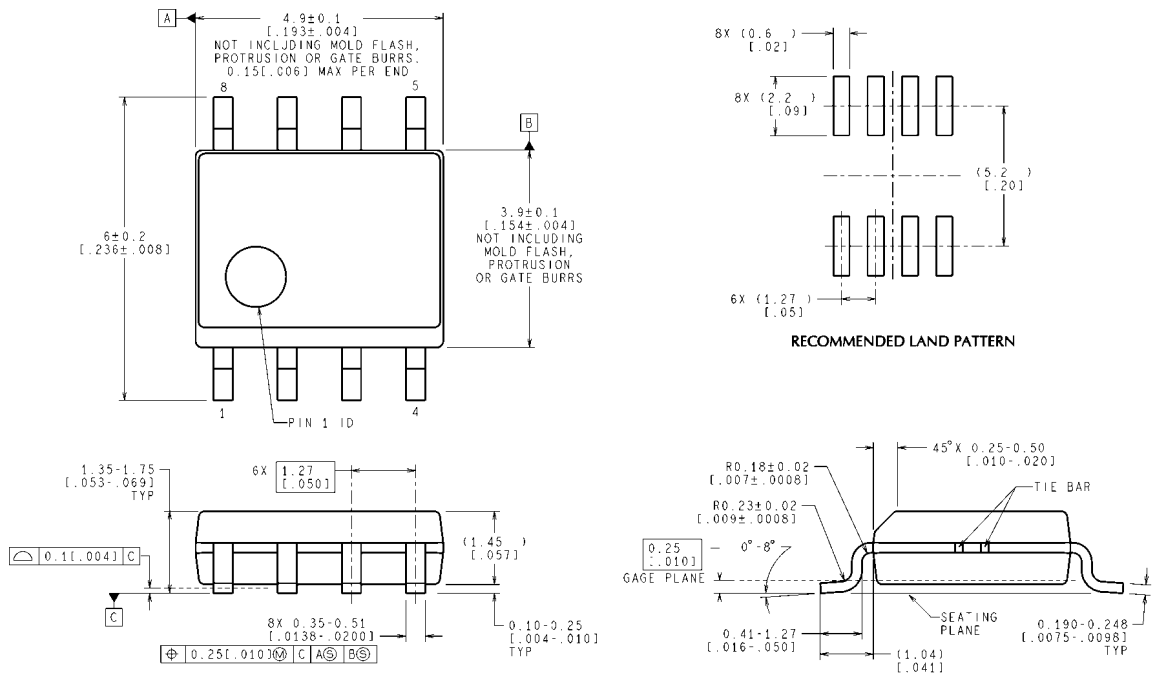

Surface Mount Package (M)
NS Package Number M08A

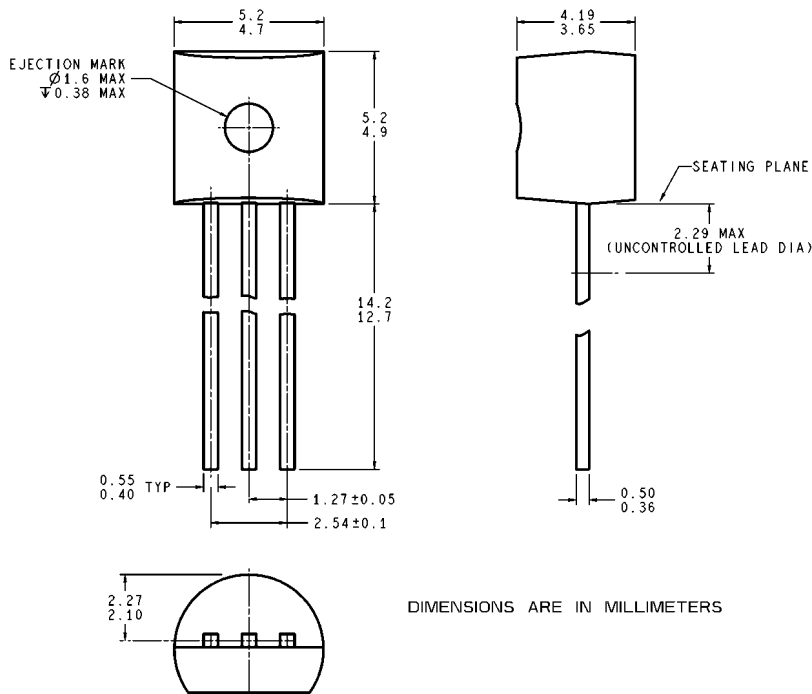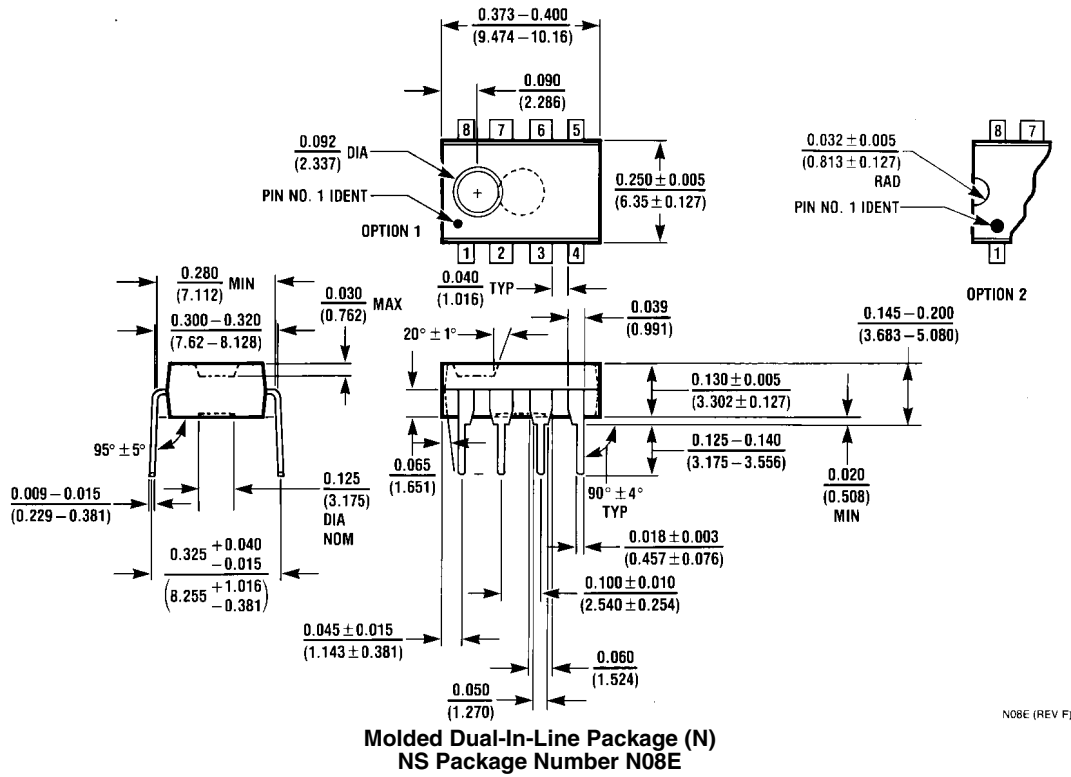


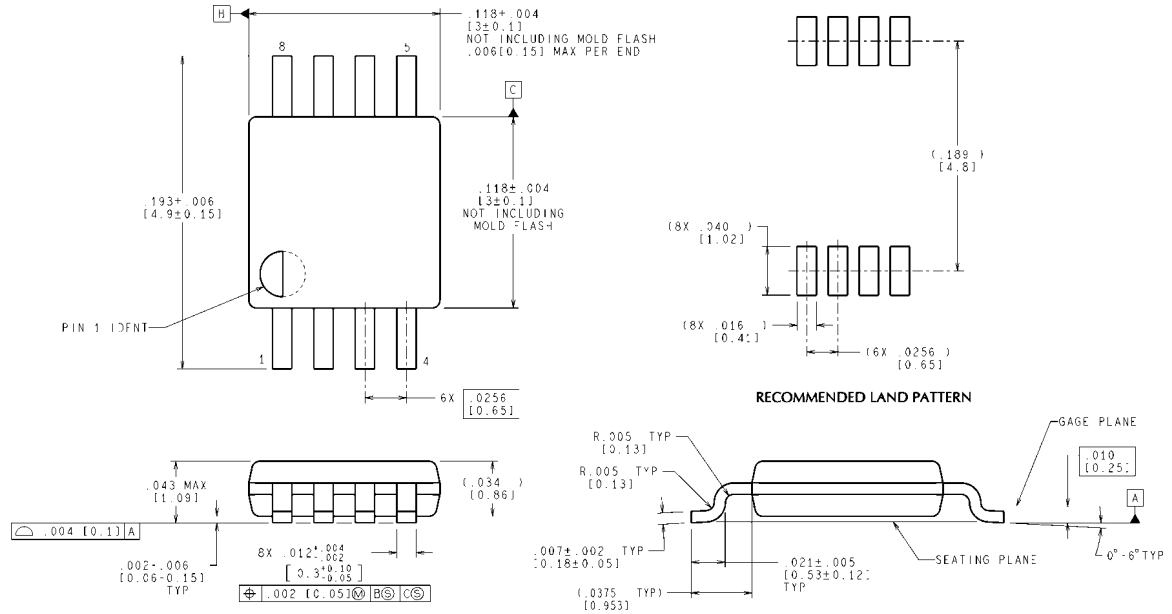

CONTROLLING DIMENSION IS INCH
VALUES IN [] ARE MILLIMETERS


MUA08A (Rev F)

**Surface Mount Package (MM)
NS Package Number MUA08A**



DIMENSIONS ARE IN MILLIMETERS

LAND PATTERN RECOMMENDATION

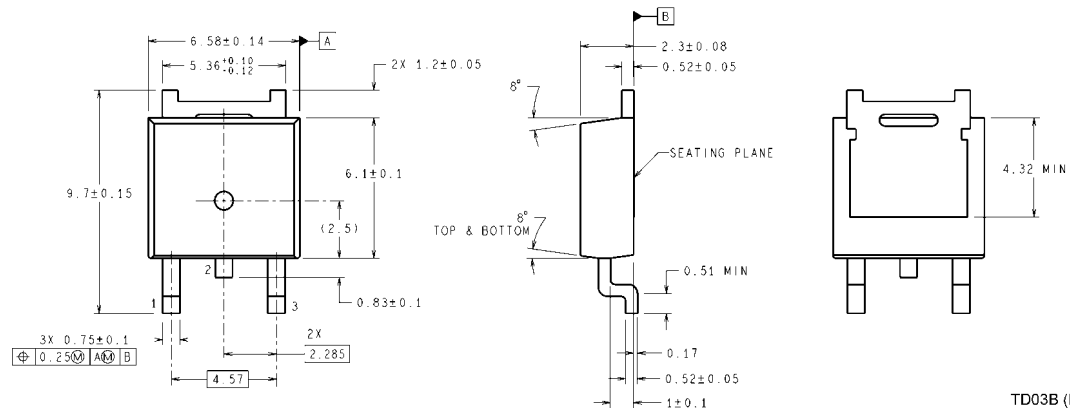

**D-Pak Package
NS Package Number TD03B**

TD03B (Rev D)

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

| Products | | Design Support | |
|--------------------------------|--|------------------------------|--|
| Amplifiers | www.national.com/amplifiers | WEBENCH® Tools | www.national.com/webench |
| Audio | www.national.com/audio | App Notes | www.national.com/appnotes |
| Clock and Timing | www.national.com/timing | Reference Designs | www.national.com/refdesigns |
| Data Converters | www.national.com/adc | Samples | www.national.com/samples |
| Interface | www.national.com/interface | Eval Boards | www.national.com/evalboards |
| LVDS | www.national.com/lvds | Packaging | www.national.com/packaging |
| Power Management | www.national.com/power | Green Compliance | www.national.com/quality/green |
| Switching Regulators | www.national.com/switchers | Distributors | www.national.com/contacts |
| LDOs | www.national.com/lido | Quality and Reliability | www.national.com/quality |
| LED Lighting | www.national.com/led | Feedback/Support | www.national.com/feedback |
| Voltage Reference | www.national.com/vref | Design Made Easy | www.national.com/easy |
| PowerWise® Solutions | www.national.com/powerwise | Solutions | www.national.com/solutions |
| Serial Digital Interface (SDI) | www.national.com/sdi | Mil/Aero | www.national.com/milaero |
| Temperature Sensors | www.national.com/tempensors | SolarMagic™ | www.national.com/solarmagic |
| Wireless (PLL/VCO) | www.national.com/wireless | PowerWise® Design University | www.national.com/training |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2009 National Semiconductor Corporation

For the most current product information visit us at www.national.com



National Semiconductor
Americas Technical
Support Center
Email: support@nsc.com
Tel: 1-800-272-9959

National Semiconductor Europe
Technical Support Center
Email: europe.support@nsc.com

National Semiconductor Asia
Pacific Technical Support Center
Email: ap.support@nsc.com

National Semiconductor Japan
Technical Support Center
Email: jpn.feedback@nsc.com