


## Transceiver Modules TCM 310 and TCM 310C

TCM 310 enables the realization of gateways for the EnOcean 868 MHz and 315 MHz radio systems. It provides a bi-directional radio interface at one end and a bi-directional serial interface at the other end. Radio messages are sent transparently through the serial interface in both directions from and to an externally connected host processor or host PC. In addition control commands can be sent from the host, e.g. to configure the repeater functionality or to manage the Smart Ack functions. TCM 310 can act as postmaster for up to 15 bi-directional sensors using Smart Ack technology.

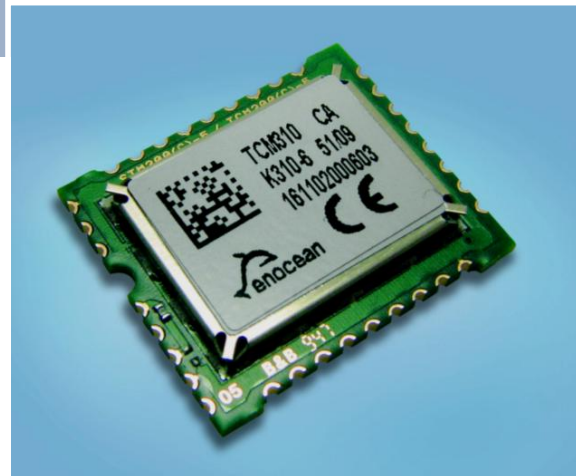

### Features

- Smart Ack controller functionality
- Transparent radio channel
- Programmable repeater functionality (1 / 2 Level)
- ESP3 support (EnOcean Serial Protocol V3)
- Not API programmable!

### Product variants

- TCM 310/310C: SMD mountable module for use with external antenna (868/315 MHz)

Type	Ordering Code
TCM 310	S3003-K310
TCM 310C	S3033-K310

### Features overview

<b>Antenna</b>	External whip or 50Ω antenna mountable
<b>Frequency</b>	315.0 MHz (TCM 310C) / 868.3 MHz (TCM 310)
<b>Radio Standard</b>	EnOcean 868 MHz/315 MHz
<b>Data rate/Modulation type</b>	125 kbps/ASK
<b>Receiver Sensitivity (at 25°C)</b>	typ. -96 dBm (868MHz), -98 dBm (315MHz)
<b>Conducted Output Power</b>	typ. 3 dBm
<b>Power Supply</b>	2.6...3.5V
<b>Serial Interface</b>	UART
<b>Current Consumption</b>	Receive mode: 33 mA Transmit mode: 24 mA
<b>Dimensions of PCB</b>	22x19x3 mm
<b>Operating temperature</b>	0 to +65°C
<b>Radio Regulations</b>	R&TTE EN 300 220 (TCM 310) FCC CFR-47 Part 15 (TCM 310C)