

PIC18 J-series

High Performance 8-bit MCUs for Cost-Sensitive Applications



PIC18 J-series offers the right level of performance and integration at the right price for complex designs

- Breakthrough in Price-Performance for 8-bit MCUs
- PIC18 J-series provides up to 12 MIPS at 3V
- Easy connection to Ethernet, USB, LCD displays, and ZigBee™ RF
- Capture/Compare/PWM, timers, UART, I²C™ and SPI
- Self programming Flash with 1k-10k endurance
- 5V tolerant digital I/O
- Aggressive 10k pricing on [MicrochipDirect](#)
- Don't pay extra for premium features you don't need

Easy to Evaluate & Program PIC18 J-series Devices




PICDEM™ HPC Explorer Board

Purchase a High Pin Count Explorer Board ([DM183022](#)) and J-series Plug-in Module (PIM) from Microchip Direct using coupon code **PIC18JPIM** to receive the PIM for only \$5! Plug-in Modules for each J-series family (MA180011 – MA180020).



If you have a PICKit2 Programmer ([PG164120](#)), use the [PICKit 2 PIC18 J-series 64/80 Pin Demo Board \(DM164120-5\)](#) featuring the PIC18F87J10.

PIC18 J-series devices are supported by Microchip's other development tool suite including [MPLAB ICD 2](#), and [MPLAB REAL ICE](#) for debugging and programming.

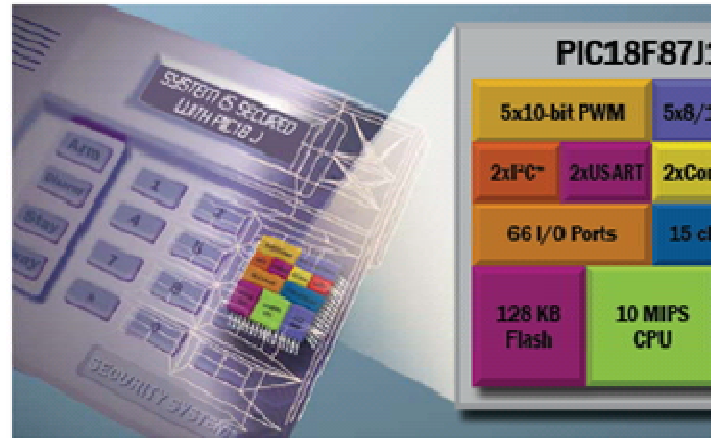

Get Started with your PIC18 J-series Design with Free & Low Cost Development Tools

- 4 [Free MPLAB IDE](#)
- 4 [Free evaluation C18 compiler](#)
- 4 [Low cost PICDEM High Pin Count Explorer Demo Board \(DM183022\)](#)
- 4 [Discounted J-series Plug-in Module](#) with coupon code **PIC18JPIM**
- 4 **NEW** [Web Seminar: Introduction to PIC18 J-series Microcontrollers](#)

PIC18 J-series Devices Available Today:

<p>PIC18F87J11 64 – 128 KB Flash 64/80 Pins 12 MIPS General Purpose Family MA180020 Plug-In Module</p>	<p>PIC18F97J60 64 – 128 KB Flash 64/80/100 Pins 10 MIPS 10Base-T Ethernet Controller Ethernet Design Center PICDEM.net 2 Dev Board</p>
<p>PIC18F85J11 8 – 32 KB Flash 64/80 Pins 10 MIPS General Purpose Family MA180018 Plug-In Module</p>	<p>PIC18F87J50 32 – 128 KB Flash 64/80 Pins 12 MIPS Full Speed USB USB Design Center</p>
<p>PIC18F87J10 32 – 128 KB Flash 64/80 Pins 10 MIPS General Purpose Family MA180015 Plug-In Module</p>	<p>PIC18F85J90 8 – 32 KB Flash 64/80 Pins 10 MIPS Segmented LCD LCD Design Center PICDEM LCD 2 Demo Board</p>
<p>PIC18F45J10 16 – 32 KB Flash 28/40 Pins 10 MIPS General Purpose Family Plug-In Modules: MA180011 PIC18F25J10, PIC18F24J10 MA180012 PIC18LF25J10, PIC18LF24J10 MA180013 PIC18F45J10, PIC18F44J10 MA180014 PIC18LF45J10, PIC18LF44J10</p>	

Additional Informa
NEW [Application Note Emul](#)
[EEPROM](#)

[Don't pay for level translators](#)
[using multiple power-supply](#)

[Tips 'n Tricks for 3V De](#)

[Migrating from PIC18F to PIC1](#)
[devices](#)

Design Centers
[3V Design Center & New](#)

[Ethernet Design Cen](#)

[USB Design Cente](#)

[LCD Design Cente](#)

[ZigBee & MiWi Design C](#)

Which J-series Plug-in Module do I need to work with the HPC Explorer Board?

Purchase a High Pin Count Explorer Board ([DM183022](#)) and J-series Plug-in Module (PIM) from Microchip Direct using coupon code **PIC18JPIM** to receive the PIM for only \$5!

PIM Part Number	To evaluate these devices:
MA180011	PIC18F25J10, PIC18F24J10
MA180012	PIC18LF25J10, PIC18LF24J10 (LF means voltage regulator disabled)
MA180013	PIC18F45J10, PIC18F44J10
MA180014	PIC18LF45J10, PIC18LF44J10 (LF means voltage regulator disabled)
MA180015	PIC18F87J10, PIC18F86J15, PIC18F86J10, PIC18F85J15, PIC18F85J10, PIC18F67J10, PIC18F66J15, PIC18F66J10, PIC18F65J15, PIC18F65J10
MA180018	PIC18F85J11, PIC18F84J11, PIC18F83J11, PIC18F65J11, PIC18F64J11, PIC18F63J11
MA180020	PIC18F87J11, PIC18F86J16, PIC18F86J11, PIC18F67J11, PIC18F66J16, PIC18F66J11

How is the PIC18 J-series different from the 5V PIC18F Family?

Feature	PIC18F	PIC18 J-series
Voltage Range	2.0 to 5.5	2.0 to 3.6
Max Speed (MHz)	40	40-48
MIPS	10	10-12
Program Flash (KB)	4 - 128	8 - 128
Flash Erase Write Cycles	100K	1K - 10K
Flash Retention (min)	40 years	20 years
Self-Write	√	√
Data EEPROM	√	
EEPROM Emulation in Flash		√
5V tolerant I/O	√	√