


AE-B64-SP3

DIP40/BGA64 specialized adapter for FLASH memory.
 Device package dimensions: 11.6 x 8.0 x 1.2 mm, 0.8 mm pitch.

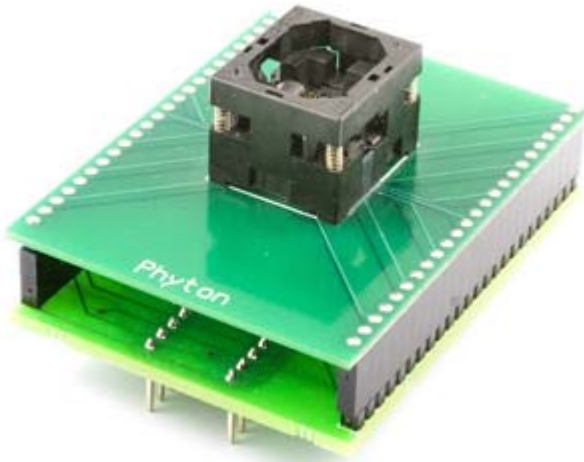

Click the programmer model below to get an appropriate list of the devices supported by the adapter:

- [ChipProg+](#)
- [ChipProg-40](#)
- [ChipProg-48, ChipProg-G4](#)

Adapter Connection Table:

| DIP-40 | BGA-64 | U1, 74HC573 | U2, 74HC573 | C1, 150pF | C2, 0.1uF |
|--------|--------|-------------|-------------|-----------|-----------|
| 1 | | | | | |
| 2 | | | | | |
| 3 | | 11 | 11 | 1 | |
| 4 | D5 | | | | |
| 5 | | | | | |
| 6 | | | | | |
| 7 | C6 | | | | |
| 8 | E5 | | | | |
| 9 | C5 | | | | |
| 10 | C3 | | | | |
| 11 | D3 | | | | |
| 12 | E3 | | | | |
| 13 | F3 | | | | |
| 14 | D2 | | | | |
| 15 | E2 | | | | |
| 16 | F2 | | | | |
| 17 | G2 | | | | |
| 18 | | | | | |
| 19 | | | | | |
| | | | | | |

AE-B64-SP3

| | | | | | |
|----|----------|-------|-------|---|---|
| 20 | G3,J9 | 1, 10 | 1, 10 | 2 | 2 |
| 21 | H2 | | | | |
| 22 | H3 | | | | |
| 23 | J3 | 2 | | | |
| 24 | K3 | | 2 | | |
| 25 | G4 | 3 | | | |
| 26 | H4 | | 3 | | |
| 27 | K4 | 4 | | | |
| 28 | J4 | | 4 | | |
| 29 | H5 | 5 | | | |
| 30 | K5 | | 5 | | |
| 31 | H6 | 6 | | | |
| 32 | J7 | | 6 | | |
| 33 | K7 | 7 | | | |
| 34 | H7 | | 7 | | |
| 35 | G7 | 8 | | | |
| 36 | K8 | | 8 | | |
| 37 | J8 | 9 | | | |
| 38 | H8 | | 9 | | |
| 39 | | | | | |
| 40 | J5,J6,J2 | 20 | 20 | | 1 |
| | | | 12 | | |
| | F9 | | 13 | | |
| | D9 | 12 | | | |
| | F8 | 13 | | | |
| | E8 | 14 | | | |
| | D8 | 15 | | | |
| | C8 | 16 | | | |
| | F7 | 17 | | | |
| | E7 | 18 | | | |
| | C7 | 19 | | | |
| | D7 | | 16 | | |
| | E6 | | 15 | | |
| | E9 | | 14 | | |
| | E4 | | 17 | | |
| | F4 | | 18 | | |
| | G9 | | 19 | | |