


MODEL 6126

SINGLE ZONE BURGLARY CONTROL



- LOOP STATUS INDICATOR
- BELL CUT-OFF/AUTOMATIC RESET
- REGULATED VOLTAGE OUTPUT
- BUILT-IN BATTERY CHARGER
- LATCHING PANIC CIRCUIT
- REMOTE KEYSWITCH CAPABILITY
- REMOTE LOOP STATUS CAPABILITY
- DRY CONTACTS RATED 5 AMPERES
- FULL STATIC AND LIGHTNING PROTECTION

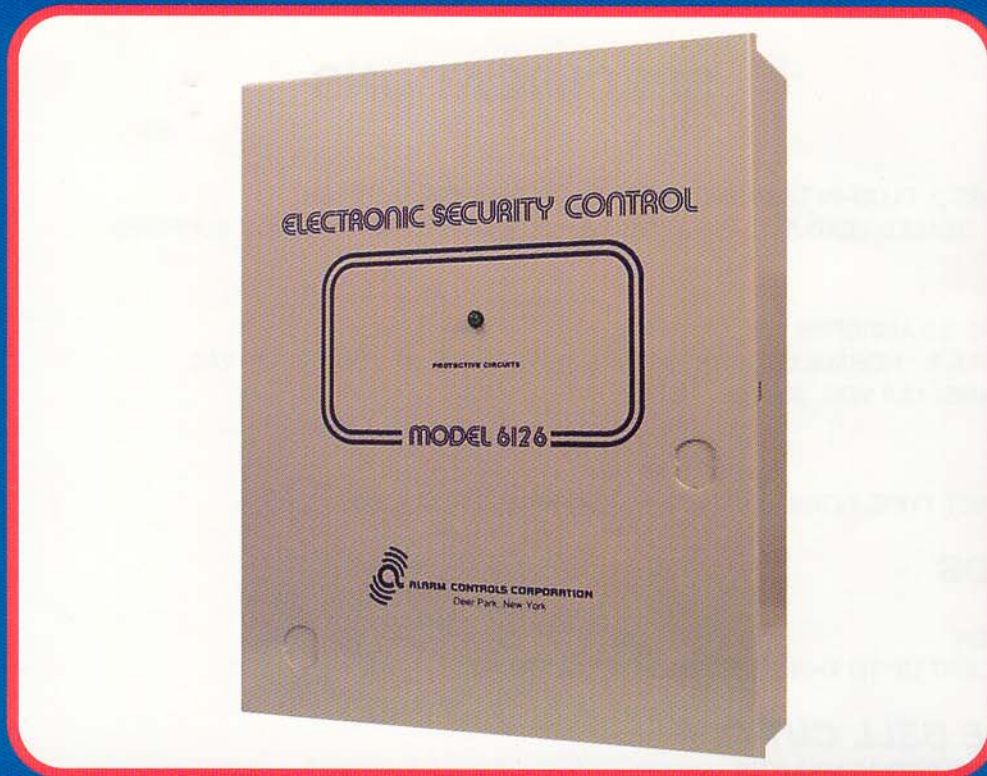

ALARM CONTROLS CORPORATION
DEER PARK, NEW YORK

MODEL 6126

SINGLE ZONE BURGLARY CONTROL

SPECIFICATIONS

POWER

INPUT: 12 VAC, CLASS 2, PLUG-IN TRANSFORMER, *TRANSFORMER SUPPLIED*

STAND-BY: 12 VOLT SEALED LEAD ACID BATTERY, 4 A.H. CAPACITY, *BATTERY NOT SUPPLIED*

OUTPUTS

BELL/SIREN: 12 VDC, 2.5 AMPERES

DRY CONTACTS: S.P.S.T. , NORMALLY-OPEN RATED 5 AMPERES @ 28 VDC OR 120 VAC

REGULATED VOLTAGE: 13.8 VDC, 300 MA., FILTERED

KEYSWITCH

MAINTAINED CONTACT TYPE, ROUND OR FLAT KEY, *KEYSWITCH NOT SUPPLIED*

REMOTE LEDS

ARMED LED: RED

SECURE LED: GREEN

CONTROL WILL ACCEPT UP TO THREE LED REMOTE STATIONS

ADJUSTABLE BELL CUT-OFF

AUTO RESTORE TIME: 2 TO 15 MINUTES

INPUTS

OPEN CIRCUIT INSTANT LOOP

CLOSED CIRCUIT INSTANT LOOP: MAXIMUM LOOP RESISTANCE 1000 OHMS

24 HOUR LATCHING PANIC CIRCUIT: OPEN CIRCUIT, (RESETS WITH ARMING KEYSWITCH)

CABINET

BEIGE FINISH, KNOCKOUT FOR OPTIONAL CAMLOCK, KNOCKOUT FOR CABINET MOUNTED KEYSWITCH, SECURE LED, FIVE ADDITIONAL KNOCKOUTS

DIMENSIONS

HEIGHT 11" , WIDTH 9" , DEPTH 3"

ALARM CONTROLS CORPORATION

"QUALITY SECURITY EQUIPMENT SINCE 1971"

19 BRANDYWINE DRIVE, P.O. BOX 280, DEER PARK, NEW YORK 11729

1 800 645-5538 631 586-4220 FAX 631 586-6500

EMAIL: INFO@ALARMCONTROLS.COM WWW.ALARMCONTROLS.COM