




E 90 fuse-disconnectors

E 90 series fuse-disconnectors are designed for connecting and disconnecting circuits under load, providing protection against short circuits and overloads. The case is made of self-extinguishing thermoplastic material resistant to high temperatures (all materials are UL listed) while the contact clips are in silver plated copper.


E 90 fuse-disconnectors can be sealed or padlocked to ensure operator safety during maintenance. Versions with blown fuse indicator allow to check whether the fuse is still working correctly or not. For easy and quick installation E 90 range is fully compatible with connecting bars, terminals and caps of S 200 MCBs



E 90 fuse-disconnectors for 10.3 x 38 mm fuses (AC-22B)

Poles	Rated current In	Modules	Order details Type code	Order code	Bbn 8012542 EAN	Price 1 piece	Price group	Weight 1 piece kg	Pack unit pc.
1	32	1	E 91/32	2CSM200923R1801	009238			0.061	6
1	32	1	E 91/32s	2CSM202483R1801	024835			0.062	6
1+N	32	2	E 91N/32	2CSM200893R1801	008934			0.130	3
2	32	2	E 92/32	2CSM200883R1801	008835			0.122	3
3	32	3	E 93/32	2CSM204753R1801	047537			0.183	2
3+N	32	4	E 93N/32	2CSM204733R1801	047339			0.252	1
4	32	4	E 94/32	2CSM204723R1801	047230			0.244	1
N	32	-	E 9N	2CSM277953R1801	779537			0.069	6

s: version with blown fuse indicator light



E 90 fuse-disconnectors for 8.5 x 31.5 mm fuses (AC-22B)

1	20	1	E 91/20	2CSM200983R1801	009832			0.061	6
1	20	1	E 91/20s	2CSM202423R1801	024231			0.062	6
2	20	2	E 92/20	2CSM200953R1801	009535			0.122	3
3	20	3	E 93/20	2CSM200943R1801	009436			0.183	2
N	20	-	E 9N	2CSM277953R1801	779537			0.069	6

s: version with blown fuse indicator light

Technical features

Type	E 90/20		E 90/32	
Fuse	8 x 32		10 x 38	
Kind of current			AC / DC	
Rated frequency	[Hz]		= / 50-60	
Rated current	[A]	20	32	
Tightening torque	[Nm]		PZ2 2-2.5	
Protection degree	IP20			
Padlocked (open)	■			
Sealed (closed)	■			
IEC 60947-3				
Rated operational voltage	[V]	400	690	
Utilization category			AC-22B / DC-20B	
Power consumption per pole	aM [W]	0.9	1.2	
	gG [W]	2.5	3.0	
IEC 60269-1				
Rated voltage AC	[V]	400	690	
Rated voltage DC	[V]	400	690	
IEC 60269-2				
Fuse system	F			
Rated voltage AC	[V]	400	690	
Rated voltage DC	[V]	250	440	
Minimum rated breaking capacity	50 AC – 25 DC			
IEC 60269-3				
Fuse system	B			
Rated voltage AC	[V]	400		

Materials


Plastic parts	Case:	Material PA 6 +30% glass fibre
		Self extinguishing class: V2 (UL94)
		Temperature resistance: 130 °C
	Opening handle:	Material PA 66 +25% glass fibre
Self-extinguishing class V0 (UL94)		
Temperature resistance: 140 °C		
Metal parts	Clips	Silver plated copper
	Clip spring	Stainless steel
	Terminals	Galvanized steel

Utilization category


Current type	Utilization category	Typical applications
Alternating current	AC-20A - AC-20B	Connecting and disconnecting under no load (in this case the devices must be marked "Do not disconnect under load")
	AC-21A - AC-21B	Switching of resistive loads, including moderate overloads
	AC-22A - AC-22B	Switching of mixed resistive/inductive loads, including moderate overloads
	AC-23A - AC-23B	Switching of motors and other highly inductive loads
Direct current	DC-20A - DC-20B	Connecting and disconnecting under no load (in this case the devices must be marked "Do not disconnect under load")
	DC-21A - DC-21B	Switching of resistive loads, including moderate overloads
	DC-22A - DC-22B	Switching of mixed resistive / inductive loads, including moderate overloads
	DC-23A - DC-23B	Switching of motors or other highly inductive loads
	Suffix A	Frequent use
	Suffix B	Infrequent use

5

Electrical symbols

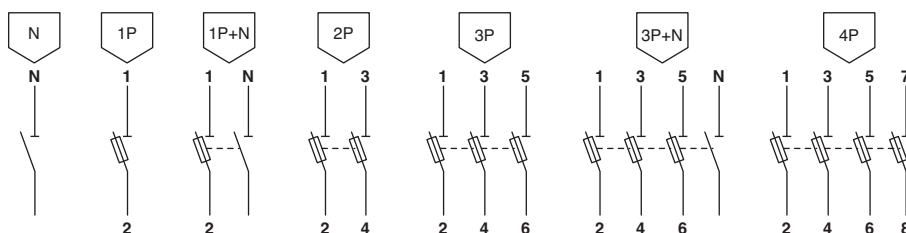


Multi-pole coupling

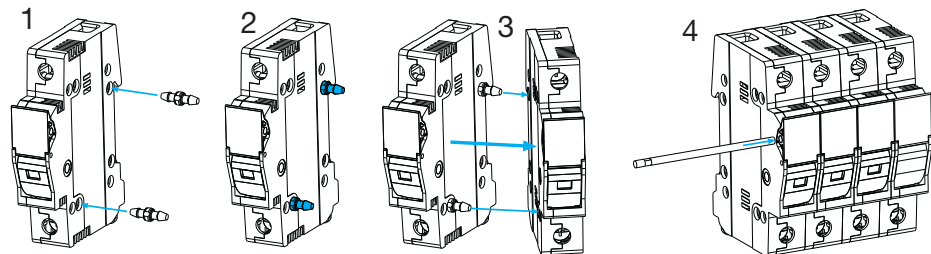



E 90 range class CC fuseholders are appropriate to protect against overloads and short circuits. They are designed for use with class CC cartridge fuses and they are available in 1P, 1P+N, 2P, 3P, 3P+N, 4P and N poles. Fuseholders can be safely locked in open position and sealed in closed position. E 90 range assure maximum protection against direct contacts thanks to IP20 finger-safe protection degree. They are the ideal solution in industrial and process control systems, automated systems, industrial systems and individual control circuits. Versions with blown fuse indicator allow to check whether the fuse is still working correctly or not.

E 90 for class CC cartridge fuses



Poles	Rated current In	Modules	Order details Type code	Order code	Bbn 8012542 EAN	Price 1 piece	Price group	Weight 1 piece kg	Pack unit pc.
1	30	1	E 91/30	2CSM205833R1801	058335			0,061	6
1	30	1	E 91/30s	2CSM251533R1801	515333			0,062	6
1+N	30	2	E 91N/30	2CSM200693R1801	006930			0,13	3
2	30	2	E 92/30	2CSM202443R1801	024439			0,122	3
3	30	3	E 93/30	2CSM200683R1801	006831			0,183	2
3+N	30	4	E 93N/30	2CSM202433R1801	024330			0,252	1
4	30	4	E 94/30	2CSM200673R1801	006732			0,244	1
N	30	1	E 9N	2CSM277953R1801	779537			0,069	6

s: version with blown fuse indicator light

Accessories for E 90 disconnecter fuseholders

Order details Type code	Order code	Bbn 8012542 EAN	Price 1 piece	Price group	Weight 1 piece kg	Pack unit pc.
E 90/ACP	2CSM205823R1801	058236			0,050	1

Technical features

			30A
Rated voltage Un	[V]		600 AC/DC
Rated current In	[A]		30
Rated frequency	[Hz]		50/60
Fuse dimensions	[mm]		10,4 x 38,1
Tightening torque	[lib-in]		18-22
Rated temperature	[°C]		75
Sealability			■
Lockability			■
Marking			UL CSA
Standards			UL 512

5



5

E 90h fuse holders

E 90h fuse holders are suitable for protection against overloads and short circuits. Available in a single module 1P+N version and in a three-module 3P+N version, they are designed for use with gG and aM cylindrical fuse links. The body is made from self-extinguishing material resistant to high temperatures, while the contact clips are in silver-plated copper. E 90h fuse holders can be sealed or padlocked to assure operator safety during maintenance. Versions with blown fuse indicator allow to check whether the fuse is still working correctly or not.

E 90h fuse holders for 10.3 x 38 mm fuses (AC-20B)



Poles	Rated current In	Modules	Order details Type code	Order code	Bbn 8012542 EAN	Price 1 piece	Price group	Weight 1 piece kg	Pack unit pc.
1+N	32	1	E 91hN/32	2CSM200913R1801	009139			0.070	6
1+N	32	1	E 91hN/32s	2CSM206573R1801	065739			0.071	6
3+N	32	3	E 93hN/32	2CSM204743R1801	047438			0.192	2

s: version with blown fuse indicator light

E 90h fuse holders for 8.5 x 31.5 mm fuses (AC-20B)



Poles	Rated current In	Modules	Order details Type code	Order code	Bbn 009634 EAN	Price 1 piece	Price group	Weight 1 piece kg	Pack unit pc.
1+N	20	1	E 91hN/20	2CSM200963R1801	009634			0.070	6
1+N	20	1	E 91hN/20s	2CSM200703R1801	007036			0.071	6
3+N	20	3	E 93hN/20	2CSM200933R1801	009337			0.192	2

s: version with blown fuse indicator light

Accessories for E90 fuse disconnectors and for E 90h fuse holders series

-	-	-	E 90/ACP	2CSM205823R1801	058236			0.118	1
---	---	---	-----------------	-----------------	---------------	--	--	-------	---


Fuse indicator LED



Technical features

Type	E 90h/20	E 90h/32
Fuse	8 x 32	10 x 38
Kind of current		AC / DC
Rated frequency	[Hz]	= / 50-60
Rated current	[A]	32
Power consumption per pole	aM [W]	1.2
	gG [W]	3.0
Tightening torque	[Nm]	PZ2 2-2.5
Protection degree		IP20
Padlocked (open)		■
Sealed (closed)		■

Electrical symbols



IEC 60269-1

Rated voltage AC	[V]	400	690
Rated voltage DC	[V]	400	690

IEC 60269-2

Fuse system		F	
Rated voltage AC	[V]	400	690
Rated voltage DC	[V]	250	440
Minimum rated breaking capacity		50 AC – 25 DC	

IEC 60269-3

Fuse system		B	
Rated voltage AC	[V]	400	




E 90 PV fuse-disconnectors

E 90 PV series fuse-disconnectors, designed for operating voltages of 1000 V d.c. with utilization category DC-20B, are particularly suited for protection against overcurrents of photovoltaic systems.

The single-pole or two-pole E 90 PV disconnectors for 10.3 x 38 mm cylindrical fuse links offer a reliable, compact and affordable solution for photovoltaic installations. Versions with blown fuse indicator allow to check whether the fuse is still working correctly or not.

E 90 PV fuse-disconnectors for 10.3 x 38 mm fuses (DC-20B)




Poles	Rated current In	Modules	Order details Type code	Order code	Bbn 8012542 EAN	Price 1 piece	Price group	Weight 1 piece kg	Pack unit pc.
1	32	1	E 91/32 PV	2CSM204713R1801	047131			0,061	6
1	32	1	E 91/32 PVs	2CSM204693R1801	046936			0,062	6
2	32	2	E 92/32 PV	2CSM204703R1801	047032			0,122	3

s: version with blown fuse indicator light

5

Electrical symbols




Technical features

Type	E 90/32 PV	
Fuse	10 x 38	
Kind of current	DC	
Rated frequency	[Hz]	= / 50-60
Rated Current	[A]	32
Tightening Torque	[Nm]	PZ2 2-2.5
Protection degree	IP20	
Padlocked (open)	■	
Sealed (closed)	■	

IEC 60947-3


Rated operational voltage	[V]	1000
Utilization category	DC-20B	
Power consumption per pole	aM [W]	1.2
	gG [W]	3.0

Application example of fuse disconnectors in photovoltaic system

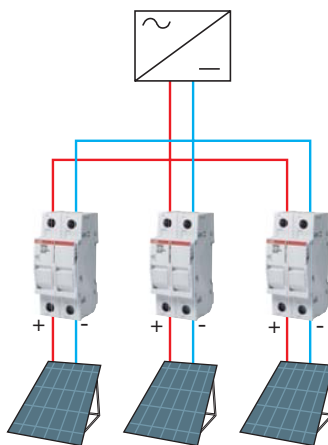


Lines protection

E 90 PV fuse-disconnectors allow overload protection of each line, thus preventing damage of critical plant components.

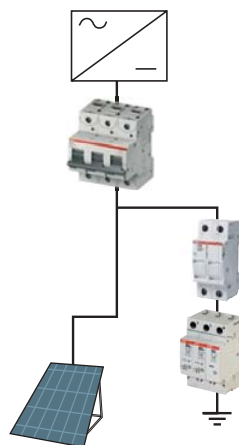

OVR Surge Protective Device protection

E 90 PV fuse-disconnectors can be installed in field enclosure as back-up protection of Surge Protective Device.

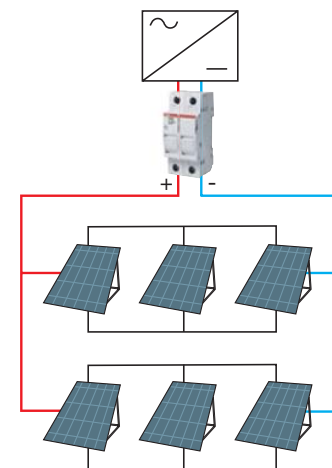

Inverter protection

In small photovoltaic plants, inverter protection against overload and short-circuit is possible by means of E 90 PV.