

## Data Sheet

### Description


The MSA-1105 is a high performance silicon bipolar Monolithic Microwave Integrated Circuit (MMIC) housed in a low cost, surface mount plastic package. This MMIC is designed for high dynamic range in either 50 or 75  $\Omega$  systems by combining low noise figure with high  $IP_3$ . Typical applications include narrow and broadband linear amplifiers in commercial and industrial systems.

The MSA-series is fabricated using Avago's 10 GHz  $f_T$ , 25 GHz  $f_{MAX}$  silicon bipolar MMIC process which uses nitride self-alignment, ion implantation, and gold metallization to achieve excellent performance, uniformity and reliability. The use of an external bias resistor for temperature and current stability also allows bias flexibility.


### Features

- High Dynamic Range Cascadable 50 $\Omega$  or 75 $\Omega$  Gain Block
- 3 dB Bandwidth: 50 MHz to 1.3 GHz
- 17.5 dBm Typical  $P_{1\text{ dB}}$  at 0.5 GHz
- 3.6 dB Typical Noise Figure at 0.5 GHz
- Surface Mount Plastic Package
- Tape-and-Reel Packaging Option Available
- Lead-free Option Available

### 05 Plastic Package



### Typical Biasing Configuration

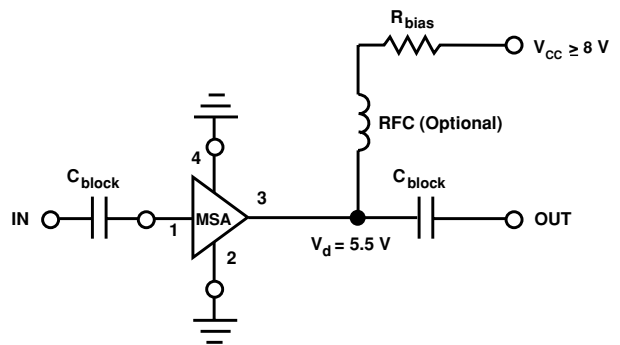

## MSA-1105 Absolute Maximum Ratings

| Parameter                          | Absolute Maximum <sup>[1]</sup> |
|------------------------------------|---------------------------------|
| Device Current                     | 80 mA                           |
| Power Dissipation <sup>[2,3]</sup> | 550 mW                          |
| RF Input Power                     | +13 dBm                         |
| Junction Temperature               | 150°C                           |
| Storage Temperature                | -65 to 150°C                    |

Thermal Resistance<sup>[2]</sup>:

$$\theta_{jc} = 125^{\circ}\text{C/W}$$

Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2.  $T_{\text{CASE}} = 25^{\circ}\text{C}$ .
3. Derate at 8 mW/°C for  $T_C > 124^{\circ}\text{C}$ .

## Electrical Specifications<sup>[1]</sup>, $T_A = 25^{\circ}\text{C}$

| Symbol             | Parameters and Test Conditions: $I_d = 60 \text{ mA}$ , $Z_0 = 50 \Omega$ | Units                                 | Min.  | Typ. | Max.      |     |
|--------------------|---|---------------------------------------|-------|------|-----------|-----|
| $G_p$              | Power Gain ( $ S_{21} ^2$ )   | $f = 0.05 \text{ GHz}$                | dB    |      | 12.7      |     |
|                    |   | $f = 0.5 \text{ GHz}$                 | dB    | 10.0 | 12.0      |     |
|                    |   | $f = 1.0 \text{ GHz}$                 | dB    |      | 10.5      |     |
| $\Delta G_p$       | Gain Flatness   | $f = 0.1 \text{ to } 1.0 \text{ GHz}$ | dB    |      | $\pm 1.0$ |     |
| $f_{3 \text{ dB}}$ | 3 dB Bandwidth <sup>[2]</sup>   |                                       | GHz   |      | 1.3       |     |
| VSWR               | Input VSWR  | $f = 0.1 \text{ to } 1.0 \text{ GHz}$ |       |      | 1.5:1     |     |
|                    | Output VSWR   | $f = 0.1 \text{ to } 1.0 \text{ GHz}$ |       |      | 1.7:1     |     |
| NF                 | 50 $\Omega$ Noise Figure  | $f = 0.5 \text{ GHz}$                 | dB    |      | 3.6       |     |
| $P_{1 \text{ dB}}$ | Output Power at 1 dB Gain Compression                                     | $f = 0.5 \text{ GHz}$                 | dBm   |      | 17.5      |     |
| $IP_3$             | Third Order Intercept Point   | $f = 0.5 \text{ GHz}$                 | dBm   |      | 30.0      |     |
| $t_D$              | Group Delay   | $f = 0.5 \text{ GHz}$                 | psec  |      | 200       |     |
| $V_d$              | Device Voltage  |                                       | V     | 4.4  | 5.5       | 6.6 |
| $dV/dT$            | Device Voltage Temperature Coefficient                                    |                                       | mV/°C |      | -8.0      |     |

Notes:

1. The recommended operating current range for this device is 40 to 70 mA.  
Typical performance as a function of current is on the following page.
2. Referenced from 50 MHz gain (GP).

## Ordering Information

| Part Numbers  | No. of Devices | Comments |
|---------------|----------------|----------|
| MSA-1105-STR  | 10             | Bulk     |
| MSA-1105-STRG | 100            | Bulk     |
| MSA-1105-TR1  | 500            | 7" Reel  |
| MSA-1105-TR1G | 500            | 7" Reel  |
| MSA-1105-TR2  | 1500           | 13" Reel |
| MSA-1105-TR2G | 1500           | 13" Reel |

Note: Order part number with a "G" suffix if lead-free option is desired.

MSA-1105 Typical Scattering Parameters ( $Z_0 = 50 \Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $I_d = 60 \text{ mA}$ )

| Freq.<br>GHz | $S_{11}$ |      | dB   | $S_{21}$ |     | dB    | $S_{12}$ |     | $S_{22}$ |      | k    |
|--------------|----------|------|------|----------|-----|-------|----------|-----|----------|------|------|
|              | Mag      | Ang  |      | Mag      | Ang |       | Mag      | Ang | Mag      | Ang  |      |
| .0005        | .80      | -17  | 19.0 | 8.94     | 171 | -26.0 | .050     | 51  | .81      | -16  | 0.53 |
| .005         | .26      | -62  | 13.9 | 4.98     | 163 | -16.8 | .144     | 15  | .26      | -64  | 0.93 |
| .025         | .07      | -48  | 12.8 | 4.36     | 174 | -16.4 | .151     | 4   | .08      | -52  | 1.08 |
| .050         | .06      | -38  | 12.7 | 4.33     | 174 | -16.3 | .153     | 2   | .06      | -48  | 1.08 |
| .100         | .05      | -41  | 12.7 | 4.31     | 170 | -16.4 | .152     | 3   | .06      | -52  | 1.09 |
| .200         | .06      | -58  | 12.6 | 4.26     | 162 | -16.2 | .155     | 5   | .08      | -73  | 1.08 |
| .300         | .07      | -74  | 12.4 | 4.19     | 154 | -16.1 | .157     | 7   | .10      | -91  | 1.07 |
| .400         | .09      | -91  | 12.2 | 4.10     | 146 | -15.8 | .163     | 8   | .12      | -105 | 1.06 |
| .500         | .10      | -105 | 12.0 | 4.00     | 138 | -15.6 | .166     | 8   | .14      | -116 | 1.05 |
| .600         | .11      | -116 | 11.8 | 3.88     | 131 | -15.4 | .171     | 10  | .17      | -126 | 1.04 |
| .700         | .13      | -128 | 11.5 | 3.76     | 123 | -15.0 | .178     | 11  | .18      | -135 | 1.03 |
| .800         | .15      | -136 | 11.2 | 3.63     | 116 | -14.7 | .184     | 11  | .21      | -144 | 1.01 |
| .900         | .16      | -145 | 10.9 | 3.49     | 109 | -15.5 | .188     | 11  | .22      | -151 | 1.01 |
| 1.000        | .18      | -152 | 10.5 | 3.37     | 102 | -14.1 | .197     | 11  | .24      | -159 | 1.00 |
| 1.500        | .28      | 174  | 8.8  | 2.75     | 72  | -13.2 | .219     | 7   | .31      | 170  | 1.00 |
| 2.000        | .38      | 150  | 7.1  | 2.28     | 48  | -12.1 | .248     | 0   | .34      | 151  | 0.99 |
| 2.500        | .46      | 133  | 5.6  | 1.90     | 28  | -11.9 | .254     | -4  | .38      | 134  | 1.02 |
| 3.000        | .53      | 118  | 4.2  | 1.62     | 11  | -11.6 | .262     | -8  | .40      | 122  | 1.04 |

Typical Performance,  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50 \Omega$

(unless otherwise noted)

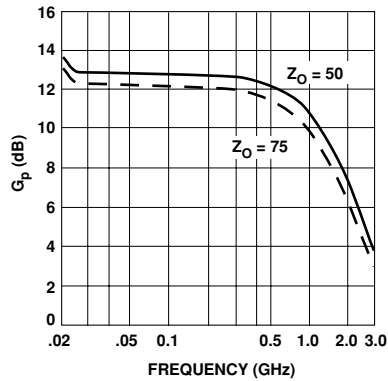


Figure 1. Typical Power Gain vs. Frequency,  $I_d = 60 \text{ mA}$ .

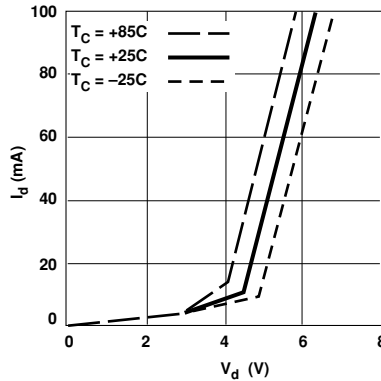


Figure 2. Device Current vs. Voltage.

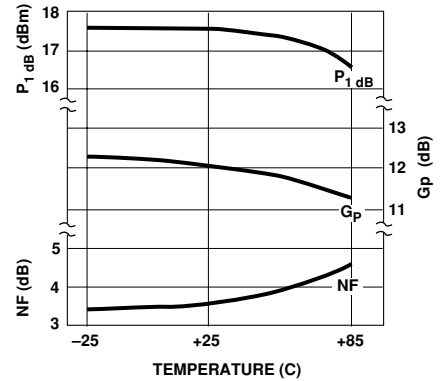


Figure 3. Output Power at 1 dB Gain Compression, Noise Figure and Power Gain vs. Case Temperature,  $f = 0.5 \text{ GHz}$ ,  $I_d = 60 \text{ mA}$ .

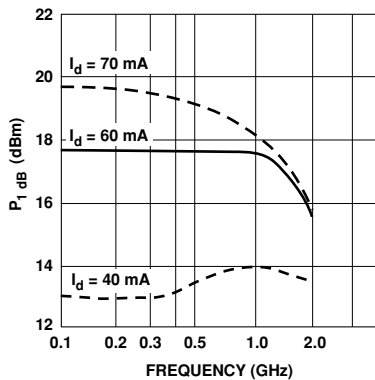


Figure 4. Output Power at 1 dB Gain Compression vs. Frequency.


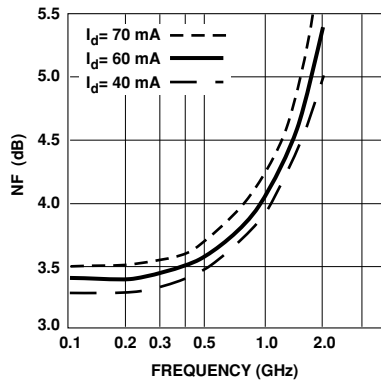


Figure 5. Noise Figure vs. Frequency.

## 05 Plastic Package Dimensions

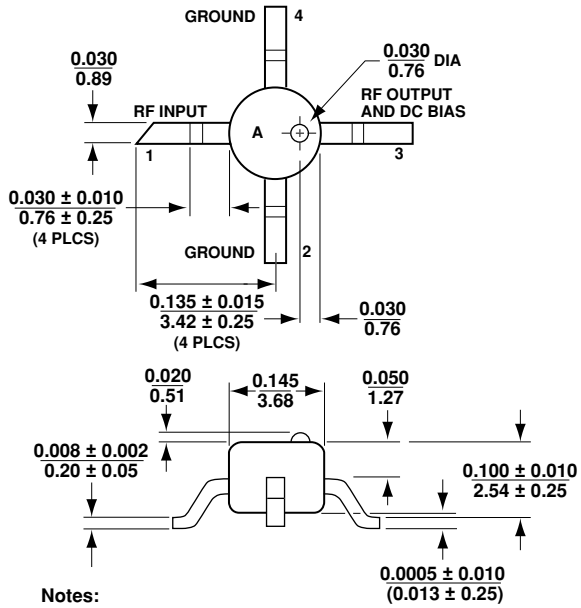

### Notes:

(unless otherwise specified)

1. Dimensions are  $\frac{\text{in}}{\text{mm}}$
2. Tolerances  
in .xxx = 0.005  
mm .xx = 0.13

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Limited in the United States and other countries. Data subject to change. Copyright © 2008 Avago Technologies, Limited. All rights reserved. Obsoletes 5989-2746EN AV02-1232EN - May 15, 2008

**AVAGO**  
TECHNOLOGIES