

APPLICATION NOTE PB58

EVALUATION KIT

EK50 is an easy to use engineering platform for prototype evaluation. Provided items include: PC board, socket, thermal washers and heatsink rated at 0.2°C/W. Amplifiers are sold separately.

HEATSINKS


The following heatsinks are mechanically compatible with this amplifier. Thermal ratings are for optimum mounting in free air.




HS01 11.6°C/W



HS02 4.5°C/W

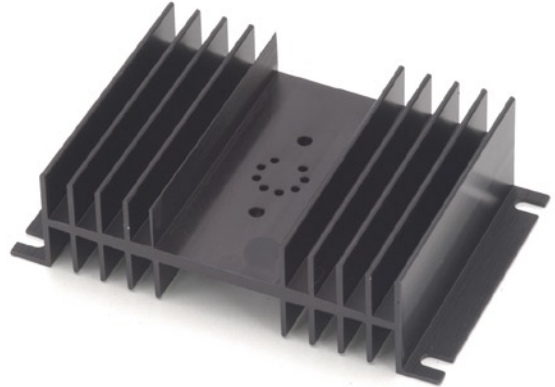


HS03 1.7°C/W

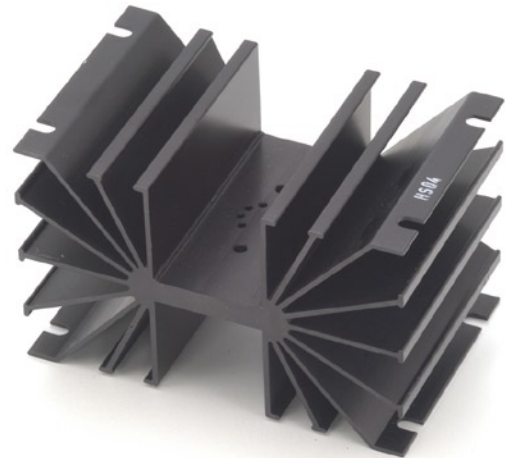

HS04 0.95°C/W



HS05 0.85°C/W

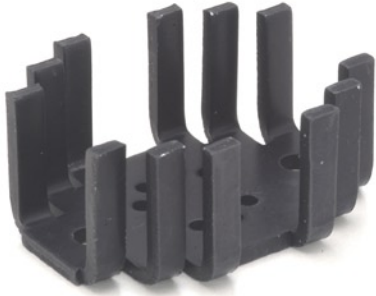

HS09 11.7°C/W



HS14 2°C/W

CAGE JACKS



HS11 0.68°C/W


With liquid cooling the HS11 thermal rating can be reduced to .1°C/W.



MS02




HS13 1.48°C/W

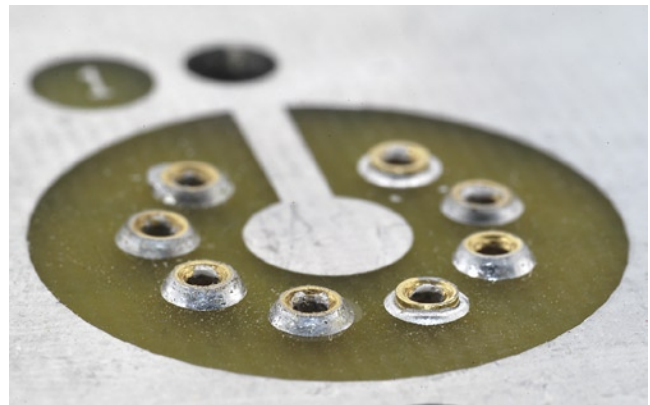


Part number MS02 consists of a package of 8 cage jacks. These are mounted directly in a print circuit board. Use a spacer between the PCB and the heatsink to avoid short circuits.

SOCKET

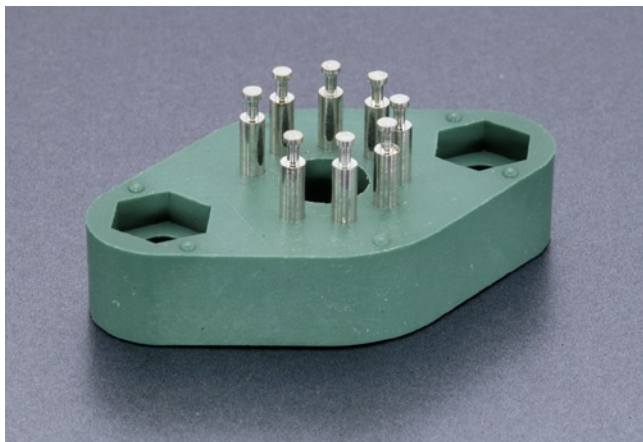

MS03

THERMAL WASHER

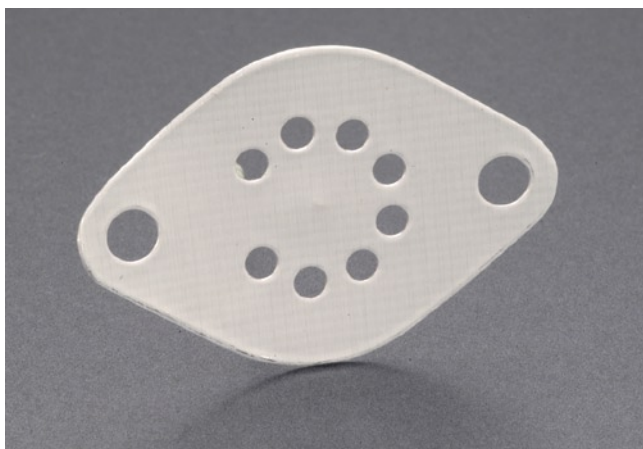

TW03

NOTES:

1. Base material is aluminum, 0.002" thick. Do not allow the washer to touch pins of the amplifier.
2. For optimum thermal transfer, avoid abrasive handling of washers which can damage their 0.5mil thick layer of thermal compound with which each side is coated.
3. The dry thermal compound will flow filling header to heatsink voids as soon as the material reached 60°C.
4. Do not store unused thermal washers above 40°C.
5. A new washer must be used for each mounting.
6. Part number TW03 consists of a package of 10 washers.
7. Thermal resistance is 0.1°C/W.