



Pressure switches - Vacuum

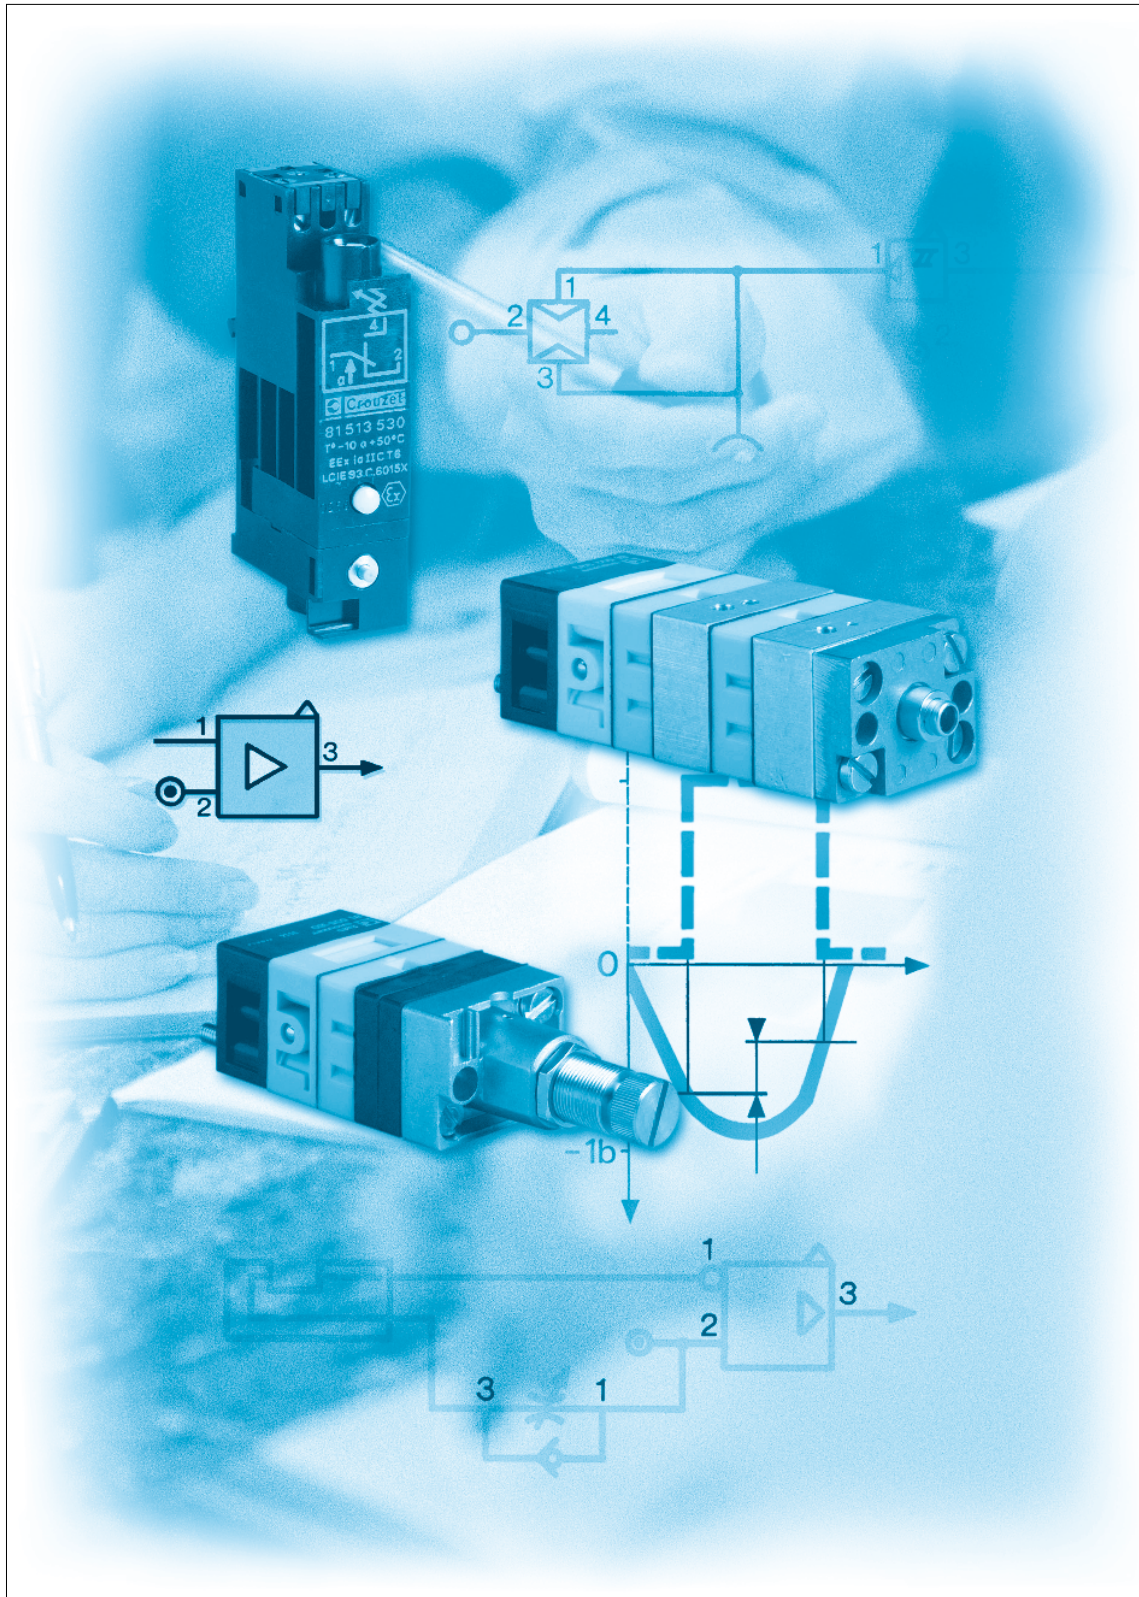

Pressure switches - vacuum (electrical output)


- Conform to the Low Voltage Directive
- Can be used without enclosure according to IEC 664-1 pollution group III



Part numbers

Pressure and vacuum switches	81 513 552	81 513 502	81 513 501	81 513 522
Mounting	DIN rail	DIN rail	DIN rail	DIN rail
	EN 50022	EN 50022	EN 50022	EN 50022
Actuators	Pressure	Pressure	Low pressure	Vacuum
Manual override	with	without	without	without

Symbol



Characteristics

Pneumatic connection	Push-in connection for semi-rigid tubing (NFE 49100)	mm	Ø 4 ext.	Ø 4 ext.	Ø 4 ext.	Ø 4 ext.
	Tapped BSP via connector		—	—	—	—
Protection		IEC 529	IP 20	IP 20	IP 20	IP 20
Permissible fluid:	air, inert gases and liquids					
Adjustment of switching pressure (* adjusted to 0.3)		bar	2 → 8	2 → 8	0.3 → 1.2 *	-0.3 → -0.8
Hysteresis		bar	0.5	0.5	—	—
	at 1 bar	bar	0.6	0.6	—	—
	at 2 bars	bar	0.8	0.8	—	—
	at 4 bars	bar	1	1	—	—
	at 6 bars	bar	—	—	—	—
	max. 200 mb		—	—	●	—
	max. 250 mb		—	—	—	●
Pressure to break			—	—	—	—
Mechanical life (operations)			10 ⁶	10 ⁶	10 ⁶	10 ⁶
Contact rating (V resistive)			5A - 220-230 V	5A - 220-230 V	5A - 220-230 V	5A - 220-230 V
Wire cross-section		mm ²	0.75	0.75	0.75	0.75
Operating temperature		°C	-10+70	-10+70	-10+70	-10+70
Weight		g	48	46	46	46
Standard electrical contact			V4 83 170 4 I W2	V4 83 170 4 I W2	V4 83 170 4 I W2	V4 83 170 4 I W2
UL and cUL approval			MH15213 (R)	MH15213 (R)	MH15213 (R)	MH15213 (R)



Operation

Pressure operated


Vacuum operated

Electrical life

(Crouzet microswitch "V4" ref 83 170 4-1-W2)

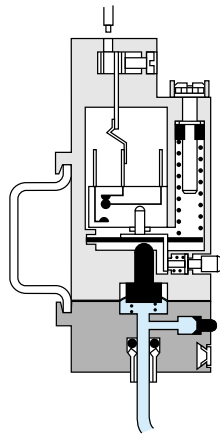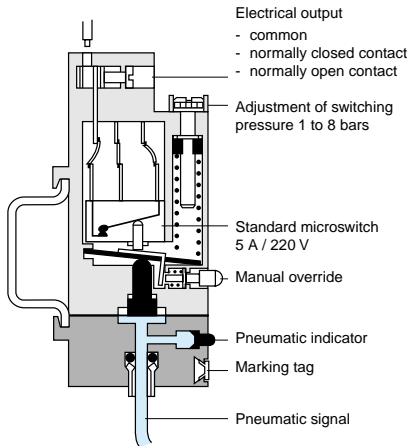



For continuous vacuum applications, please consult us.

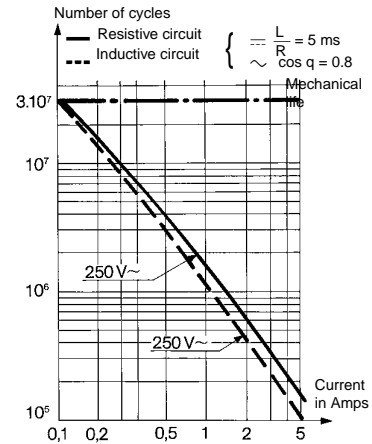


Other information

On request :

- Microswitch V4 ref. 83 170 0 i W2 high current
- Microswitch V4 ref. 83 170 9 i W2 low current

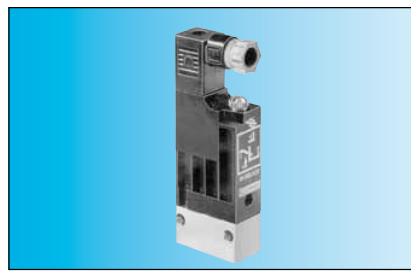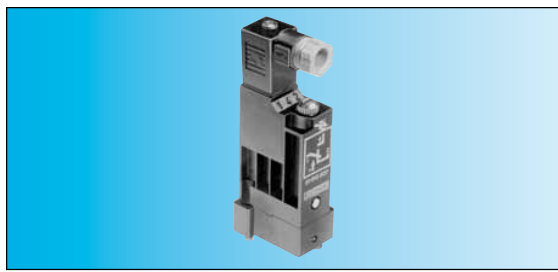

81 513 516	81 513 510	81 513 527	81 513 533	81 513 523	81 509 080	81 509 085
Base mounted page 4/14	Base mounted page 4/14	Base mounted page 4/14	2 screws M4	2 screws M4	Base mounted page 4/14	Base mounted page 4/14
Pressure without	Pressure with	Vacuum without	Pressure without	Vacuum without	Pressure without	Pressure with





Ø 4 ext.	Ø 4 ext.	Ø 4 ext.	—	—	—	—
IP 54	IP 54	IP 54	1/8 BSP IP 54	1/8 BSP IP 54	Via sub-base IP 54	Via sub-base IP 54
2 → 8	2 → 8	-0.3 → -0.9	2 → 8	-0.3 → -0.8	1.4 ± 0.5	1.4 ± 0.5
0.5	0.5	—	0.5	—	—	—
0.6	0.6	—	0.6	—	—	—
0.8	0.8	—	0.8	—	—	—
1	1	—	1	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	0.6 ± 0.2	0.6 ± 0.2
10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶
5A - 220-230 V	5A - 220-230 V	5A - 220-230 V	5A - 220-230 V	5A - 220-230 V	5A - 220-230 V	5A - 220-230 V
0.75	0.75	0.75	0.75	0.75	1.5	1.5
-10+70	-10+70	-10+70	-10+70	-10+70	-10+70	-10+70
56	58	56	65	65	80	80
V4 83 170 41 W2	V4 83 170 41 W2	V4 83 170 41 W2	V4 83 170 41 W2	V4 83 170 41 W2	83 133 004	83 133 004
MH15213 (R)	MH15213 (R)	MH15213 (R)	MH15213 (R)	MH15213 (R)		

Electrical connections
81 513 501 - 81 513 502
81 513 522 - 81 513 552

Dimensions
81 513 552 - 81 513 502
81 513 501 - 81 513 522

Pressure switch with connector
81 513 516 - 81 513 510
81 513 527

81 516 082
81 513 533
81 513 523

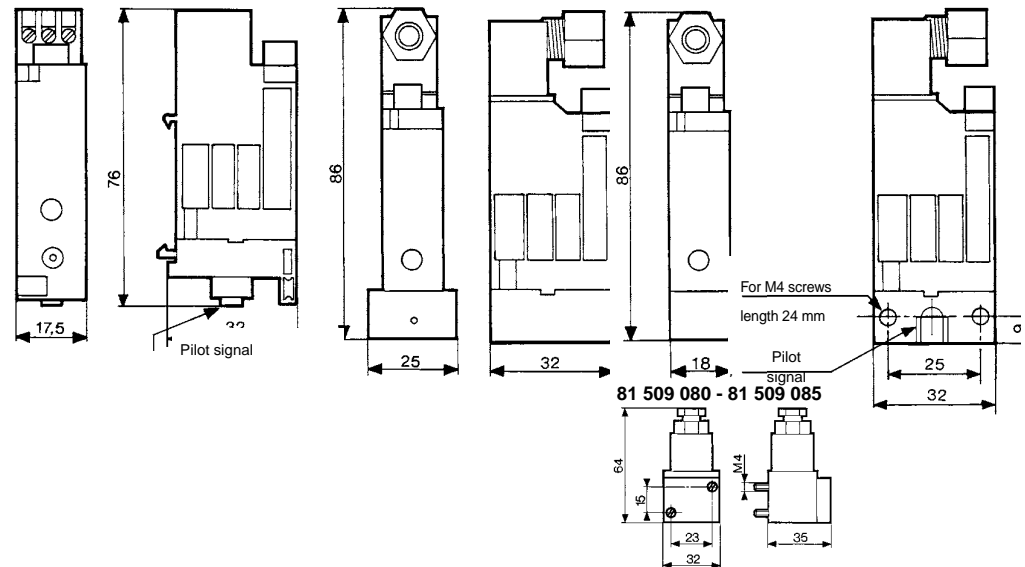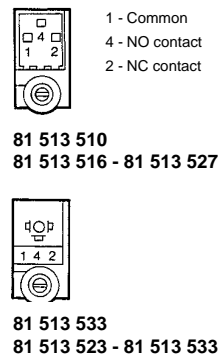

Adjustable pressure switches (manostats) (pneumatic output)



■ 100 % pneumatic



Part numbers (and adjustment ranges)

Adjustment range	50 → 500 mb	81 505 140	81 502 140
	0.1 → 2.5 b	81 505 150	81 502 150
	2 → 8 b	81 505 160	81 502 160
Version		Positive output	Negative output
Accuracy	50 → 500 mb	10 %	10 %
	0.1 → 2.5 b	4 %	4 %
	2 → 8 b	4 %	4 %

Symbol




Characteristics

Orifice diameter	mm	2.5	2.5
Flow at 4 bars	Nl/min	170	170
Hysteresis	50 → 500 mb	60 mb	60 mb
	0.1 → 2.5 b	100 mb	100 mb
	2 → 8 b	320 mb	320 mb
Connection - sub-base pages 54/55			
Operating temperature	°C	-5 +50	-5 +50
Mechanical life	operations	3 x 10 ⁶	3 x 10 ⁶
Weight	g	160	160

Connections


Example of pressure threshold adjustment (mini-regulator - manostat)




Principle of operation

The manostats provide an on or off output signal when the input signal reaches a predetermined pressure threshold.

Positive output

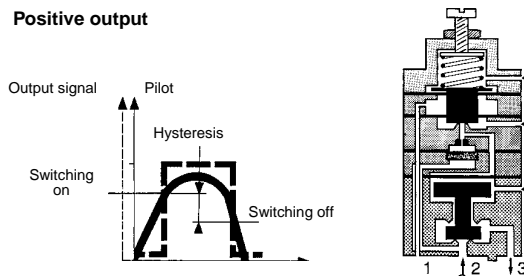


Negative output

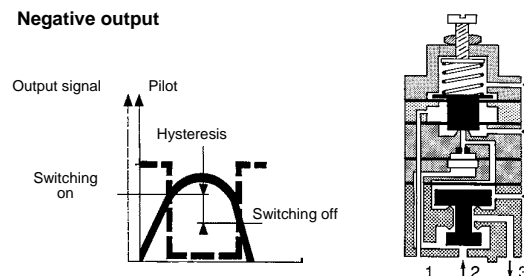

Dimensions

81 502 140 - 81 502 150 - 81 502 160
81 505 140 - 81 505 150 - 81 505 160

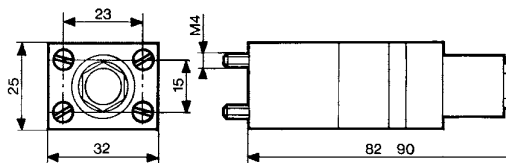


Other information

Pressure switches with electrical output on request.

Adjustable vacuum switches (vacuostat)

- 100 % pneumatic
- For vacuum $-0,1 \rightarrow -0,9 \text{ B}$






Part numbers

81 505 110
Positive output

81 502 110
Negative output

81 508 110
Electrical output

Symbol




Characteristics

Adjustment range	b	$-0,1 \cdot -0,9$	$-0,1 \cdot -0,9$	$-0,1 \cdot -0,9$
Flow at 6 bars	NI/min	170	170	170
Hysteresis	mb	80	80	80
Connection - sub-base pages 54/55		•	•	•
Operating temperature	°C	$-5 \text{ } +50$	$-5 \text{ } +50$	$-5 \text{ } +50$
Mechanical life	operations	3×10^6	3×10^6	3×10^6
Weight	g	160	160	180

Connections



Example of use:
Vacuum handling (vacuum generator, vacuum pad, vacuostats).

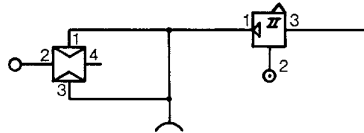



Principle of operation

Vacuostats provide an on or off output signal when the input signal reaches a predetermined pressure threshold.

Positive output




Negative output




Dimensions

81 502 110 - 81 505 110

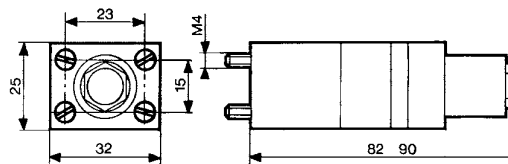

81 508 110

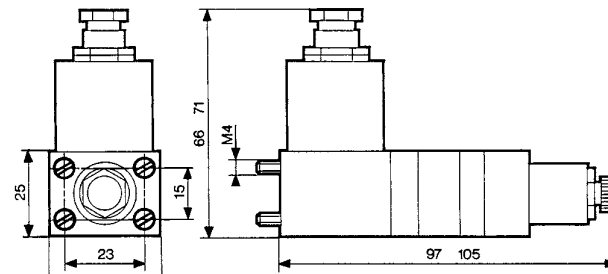

Vacuum handling components

- Sur le principe du Venturi
- Facilement raccordable




Part numbers

Vacuum generators

81 535 301
Sub-base mounting

81 545 001
Plug-in


81 545 005
Plug-in



Characteristics

Push-in connectors for semi-rigid tubing (NFE 49100)	Male/Female/Female (MFF) Female/Female/ Female (FFF)	—	Ø 4 mm	—
Operating pressure	bar	2 → 8	—	Ø 6 mm
Vacuum pad material		—	—	—
Weight	g	80	13	25

Detection of the pressure decrease can be achieved by the use of manostats (see pages 38/39)

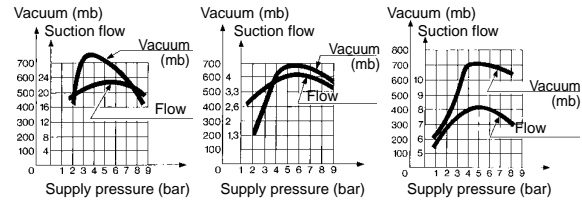


3


Dimensions

81 535 301

Sub-base mounting 81 531... and 81 532...

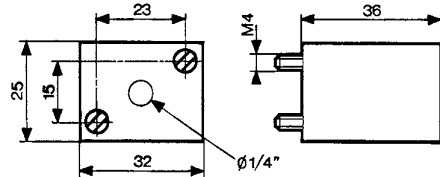

81 545 001

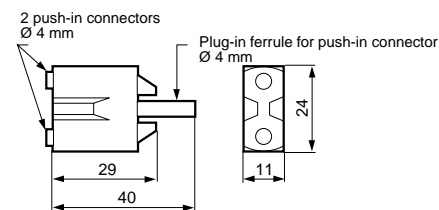

81 545 005

