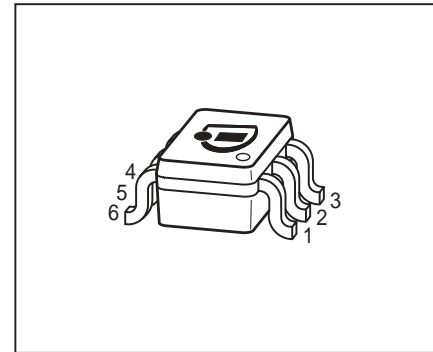

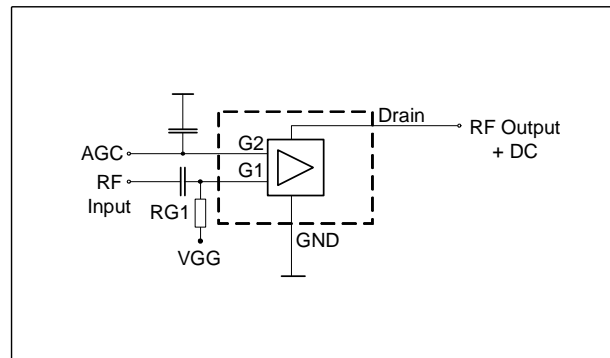



**DUAL N-Channel MOSFET Tetrode**

- Two gain controlled input stages for UHF and VHF -tuners e.g. (NTSC, PAL)
- Optimized for UHF (amp. B) and VHF (amp. A)
- Integrated gate protection diodes
- High AGC-range, low noise figure, high gain
- Improved cross modulation at gain reduction
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101


**BG3123**

**BG3123R**


**ESD (Electrostatic discharge) sensitive device, observe handling precaution!**

| Type    | Package | Pin Configuration |      |      |       |      |        | Marking |
|---------|---------|-------------------|------|------|-------|------|--------|---------|
| BG3123  | SOT363  | 1=G1*             | 2=G2 | 3=D* | 4=D** | 5=S  | 6=G1** | KOs     |
| BG3123R | SOT363  | 1=G1*             | 2=S  | 3=D* | 4=D** | 5=G2 | 6=G1** | KRs     |

\* For amp. A; \*\* for amp. B

180° rotated tape loading orientation available

**Maximum Ratings**

| Parameter                          | Symbol           | Value       | Unit |
|------------------------------------|------------------|-------------|------|
| Drain-source voltage               | $V_{DS}$         | 8           | V    |
| Continuous drain current<br>amp. A | $I_D$            | 25          | mA   |
| amp. B                             |                  | 20          |      |
| Gate 1/ gate 2-source current      | $\pm I_{G1/2SM}$ | 1           |      |
| Gate 1/ gate 2-source voltage      | $\pm V_{G1/G2S}$ | 6           | V    |
| Total power dissipation            | $P_{tot}$        | 200         | mW   |
| Storage temperature                | $T_{stg}$        | -55 ... 150 | °C   |
| Channel temperature                | $T_{ch}$         | 150         |      |

**Thermal Resistance**

| Parameter                               | Symbol      | Value | Unit |
|---|-------------|-------|------|
| Channel - soldering point <sup>1)</sup> | $R_{thchs}$ | ≤ 150 | K/W  |

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified


| Parameter  | Symbol          | Values |      |      | Unit          |
|--|-----------------|--------|------|------|---------------|
|  |                 | min.   | typ. | max. |               |
| <b>DC Characteristics</b>  |                 |        |      |      |               |
| Drain-source breakdown voltage<br>$I_D = 10 \mu\text{A}$ , $V_{G1S} = 0 \text{ V}$ , $V_{G2S} = 0 \text{ V}$   | $V_{(BR)DS}$    | 12     | -    | -    | V             |
| Gate1-source breakdown voltage<br>$+I_{G1S} = 10 \text{ mA}$ , $V_{G2S} = 0 \text{ V}$ , $V_{DS} = 0 \text{ V}$  | $+V_{(BR)G1SS}$ | 6      | -    | 15   |               |
| Gate2-source breakdown voltage<br>$+I_{G2S} = 10 \text{ mA}$ , $V_{G1S} = 0 \text{ V}$ , $V_{DS} = 0 \text{ V}$  | $+V_{(BR)G2SS}$ | 6      | -    | 15   |               |
| Gate1-source leakage current<br>$V_{G1S} = 6 \text{ V}$ , $V_{G2S} = 0 \text{ V}$  | $+I_{G1SS}$     | -      | -    | 50   | $\mu\text{A}$ |
| Gate2-source leakage current<br>$V_{G2S} = 8 \text{ V}$ , $V_{G1S} = 0 \text{ V}$ , $V_{DS} = 0 \text{ V}$   | $+I_{G2SS}$     | -      | -    | 50   | nA            |
| Drain current<br>$V_{DS} = 5 \text{ V}$ , $V_{G1S} = 0 \text{ V}$ , $V_{G2S} = 4.5 \text{ V}$  | $I_{DSS}$       | -      | -    | 10   | $\mu\text{A}$ |
| Drain-source current<br>$V_{DS} = 5 \text{ V}$ , $V_{G2S} = 4 \text{ V}$ , $R_{G1} = 60 \text{ k}\Omega$ ,<br>amp. A<br>$V_{DS} = 5 \text{ V}$ , $V_{G2S} = 4 \text{ V}$ , $R_{G1} = 50 \text{ k}\Omega$ ,<br>amp. B | $I_{DSX}$       | -      | 14   | -    | mA            |
| Gate1-source pinch-off voltage<br>$V_{DS} = 5 \text{ V}$ , $V_{G2S} = 4 \text{ V}$ , $I_D = 20 \mu\text{A}$  | $V_{G1S(p)}$    | -      | 0.7  | -    | V             |
| Gate2-source pinch-off voltage<br>$V_{DS} = 5 \text{ V}$ , $I_D = 20 \mu\text{A}$  | $V_{G2S(p)}$    | -      | 0.6  | -    |               |

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter  | Symbol       | Values                         |                                    |                            | Unit |
|--|--------------|--------------------------------|------------------------------------|----------------------------|------|
|  |              | min.                           | typ.                               | max.                       |      |
| <b>AC Characteristics</b> $V_{DS} = 5\text{V}$ , $V_{G2S} = 4\text{V}$ , ( $I_D = 14\text{ mA}$ ) (verified by random sampling)  |              |                                |                                    |                            |      |
| Forward transconductance<br>amp. A<br>amp. B   | $g_{fs}$     | -<br>-<br>-                    | 30<br>25                           | -<br>-                     | mS   |
| Gate1 input capacitance<br>$f = 10\text{ MHz}$ , amp. A<br>$f = 10\text{ MHz}$ , amp. B  | $C_{g1ss}$   | -<br>-                         | 1.9<br>1.5                         | -<br>-                     | pF   |
| Output capacitance<br>$f = 10\text{ MHz}$ , amp. A<br>$f = 10\text{ MHz}$ , amp. B   | $C_{dss}$    | -<br>-                         | 1.3<br>1.1                         | -<br>-                     |      |
| Power gain<br>$f = 800\text{ MHz}$ , amp. A<br>$f = 800\text{ MHz}$ , amp. B<br>$f = 45\text{ MHz}$ , amp. A<br>$f = 45\text{ MHz}$ , amp. B   | $G_p$        | -<br>-<br>-<br>-               | 25<br>24<br>32<br>30               | -<br>-<br>-<br>-           | dB   |
| Noise figure<br>$f = 800\text{ MHz}$ , amp. A<br>$f = 800\text{ MHz}$ , amp. B<br>$f = 45\text{ MHz}$ , amp. A<br>$f = 45\text{ MHz}$ , amp. B   | $F$          | -<br>-<br>-<br>-               | 1.8<br>1.8<br>1.4<br>1.6           | -<br>-<br>-<br>-           | dB   |
| Gain control range<br>$V_{G2S} = 4 \dots 0\text{ V}$ , $f = 800\text{ MHz}$  | $\Delta G_p$ | 45                             | -                                  | -                          |      |
| Cross-modulation $k=1\%$ , $f_w=50\text{MHz}$ , $f_{unw}=60\text{MHz}$<br>amp.A , AGC = 0 dB<br>amp. B, AGC = 0 dB<br>amp. A , AGC = 10 dB<br>amp. B , AGC = 10 dB<br>amp. A, AGC = 40 dB<br>amp. B, AGC = 40 dB | $X_{mod}$    | 90<br>90<br>-<br>-<br>98<br>98 | 96<br>97<br>91<br>94<br>103<br>104 | -<br>-<br>-<br>-<br>-<br>- | -    |


**Total power dissipation  $P_{tot} = f(T_S)$**

amp. A

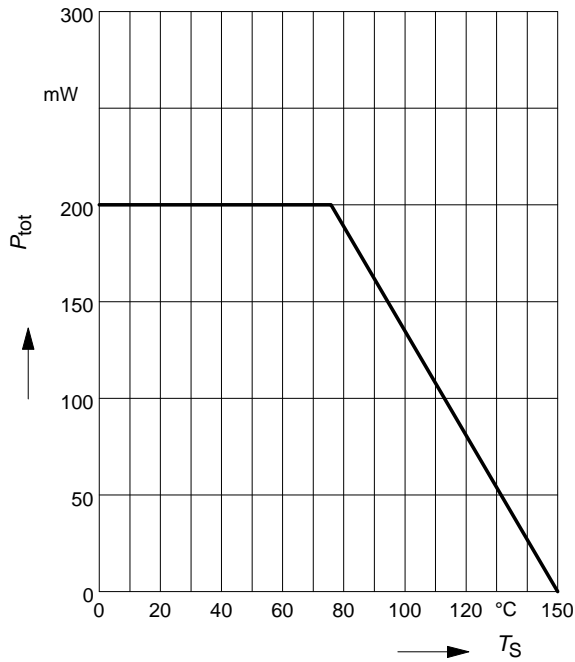

**Total power dissipation  $P_{tot} = f(T_S)$**


amp. B

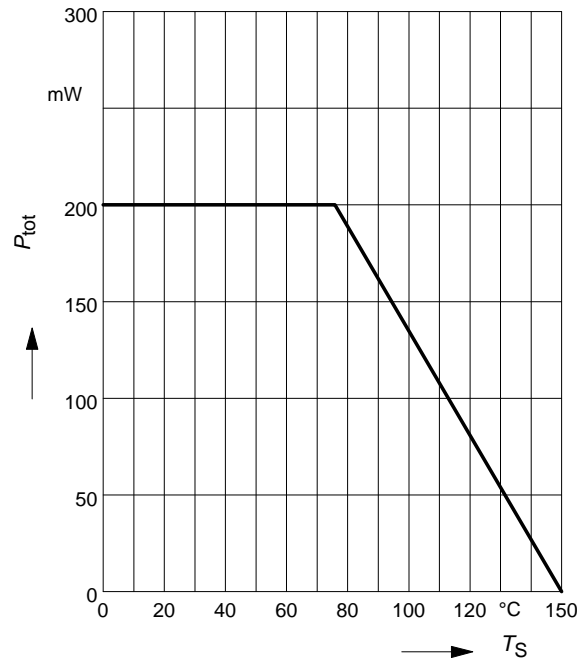

**Drain current  $I_D = f(I_{G1})$**

$V_{G2S} = 4V$


amp. A




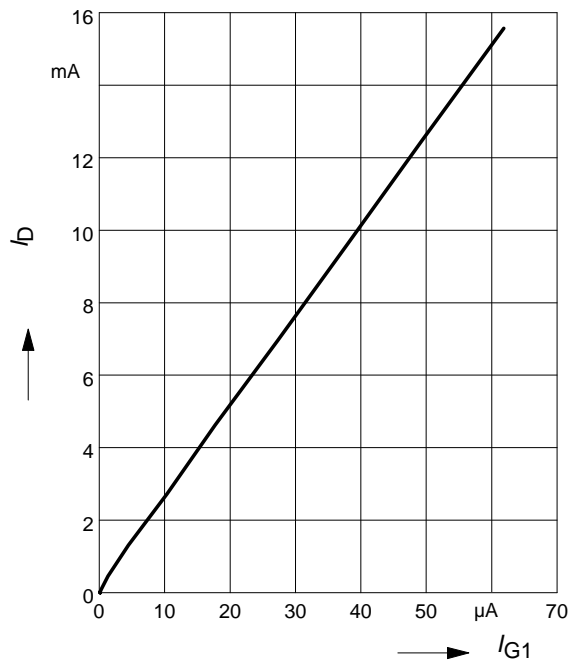






**Drain current  $I_D = f(I_{G1})$**

$V_{G2S} = 4V$

amp. B

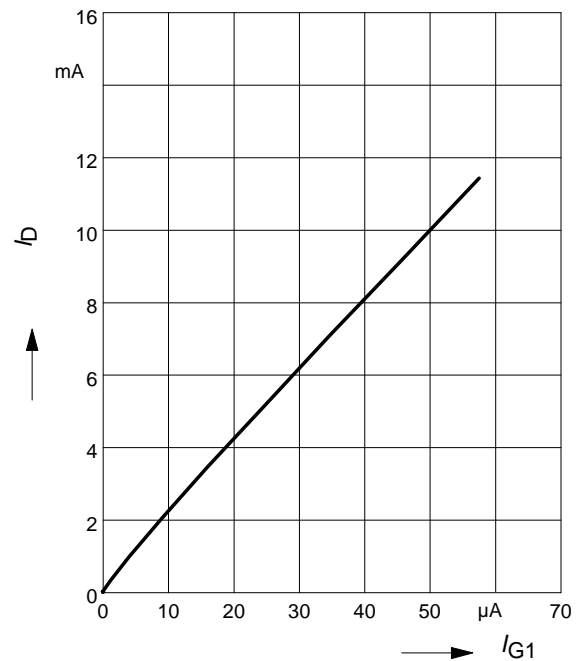

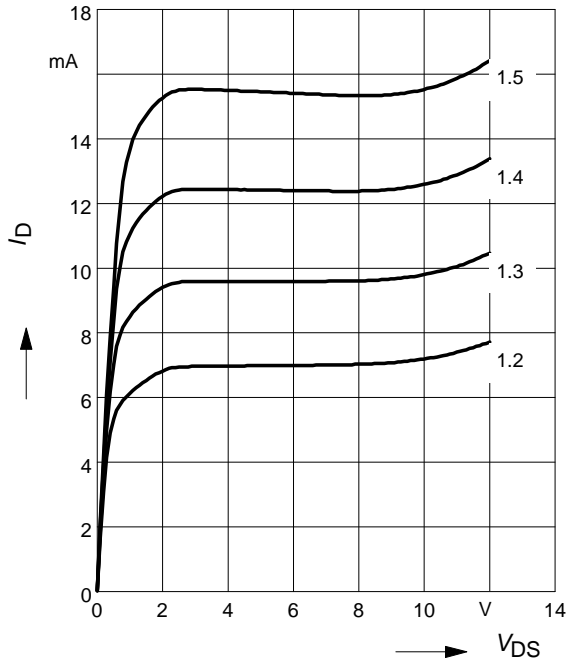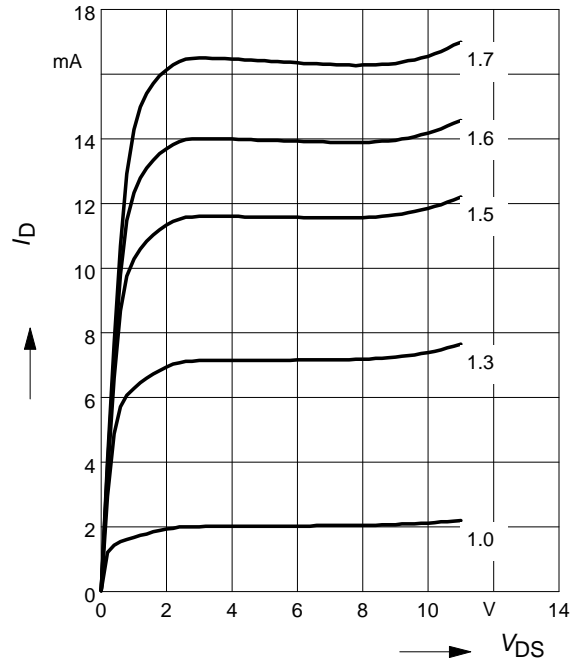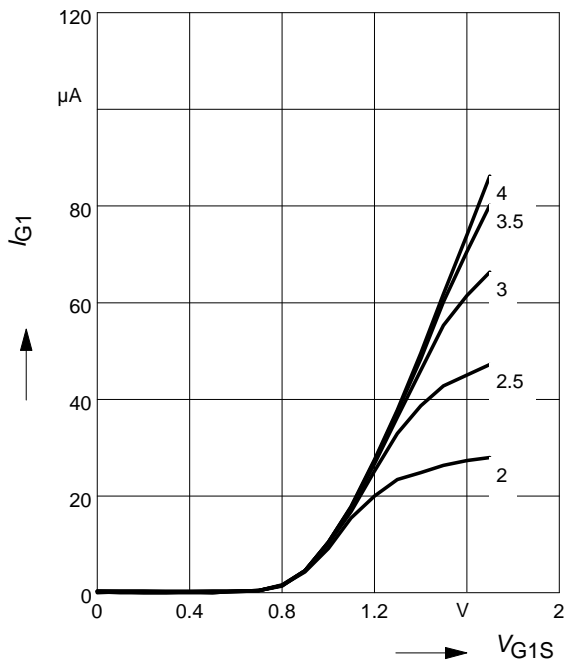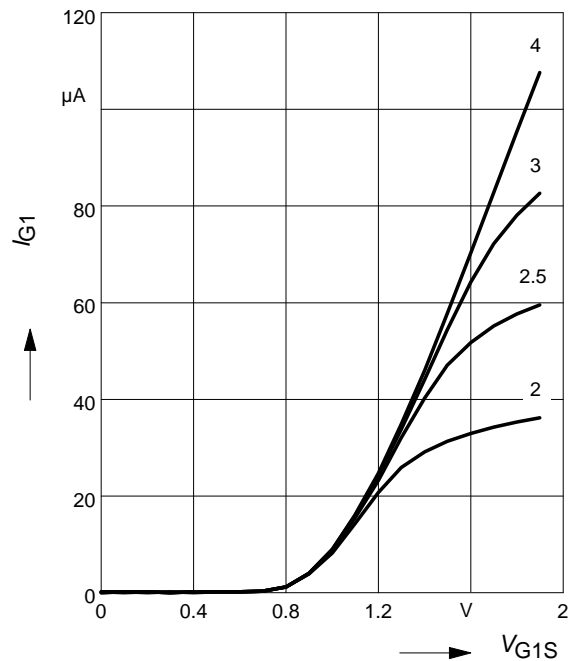
**Output characteristics  $I_D = f(V_{DS})$** 
 $V_{G2S} = 4V$ ,  $V_{G1S} =$  Parameter in V  
 amp. A

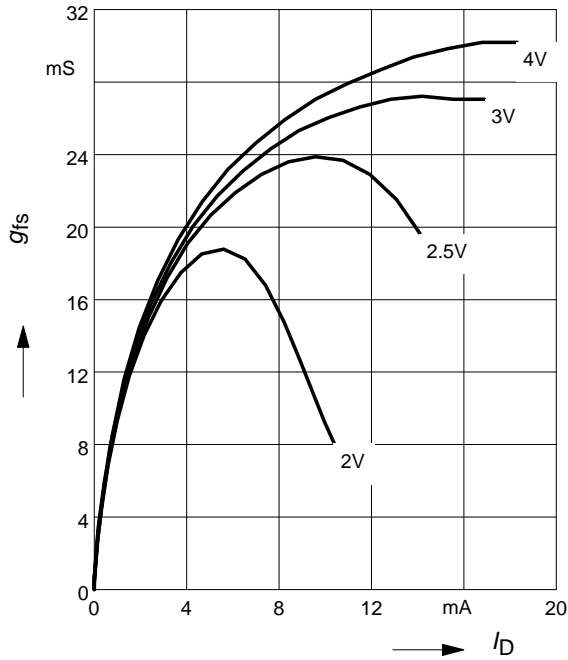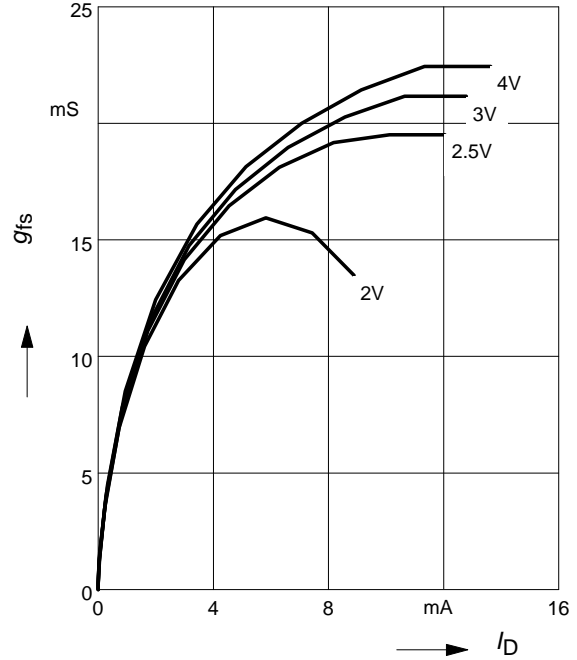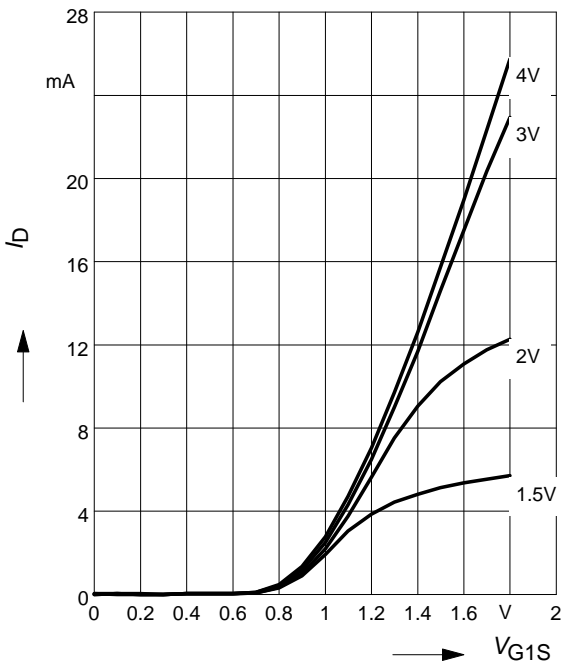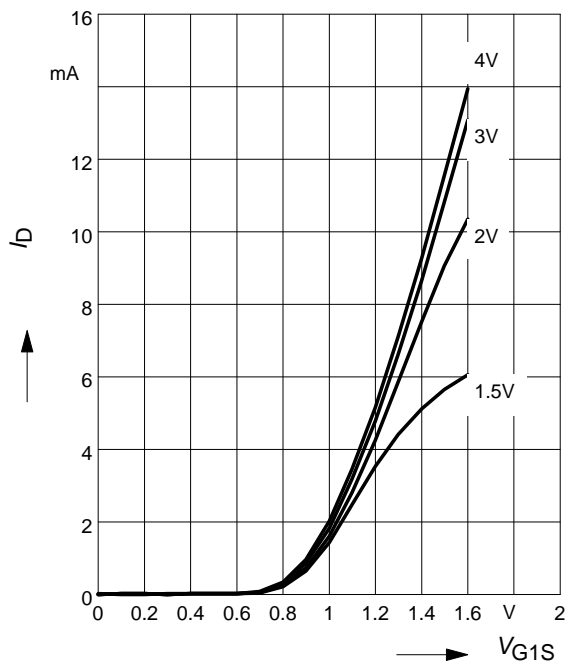**Output characteristics  $I_D = f(V_{DS})$** 
 $V_{G2S} = 4V$ ,  $V_{G1S} =$  Parameter in V  
 amp. B

**Gate 1 current  $I_{G1} = f(V_{G1S})$** 
 $V_{DS} = 5V$ ,  $V_{G2S} =$  Parameter in V  
 amp. A

**Gate 1 current  $I_{G1} = f(V_{G1S})$** 
 $V_{DS} = 5V$ ,  $V_{G2S} =$  Parameter in V  
 amp. B


**Gate 1 forward transconductance**
 $g_{fs} = f(I_D)$ ,  $V_{DS} = 5V$ ,  $V_{G2S} = \text{Parameter}$   
 amp. A

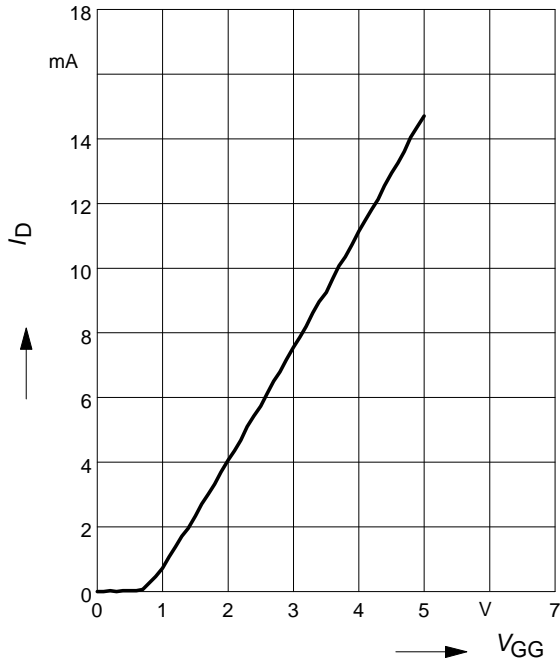**Gate 1 forward transconductance**
 $g_{fs} = f(I_D)$ ,  $V_{DS} = 5V$ ,  $V_{G2S} = \text{Parameter}$   
 amp. B

**Drain current  $I_D = f(V_{G1S})$** 
 $V_{DS} = 5V$ ,  $V_{G2S} = \text{Parameter}$   
 amp. A

**Drain current  $I_D = f(V_{G1S})$** 
 $V_{DS} = 5V$ ,  $V_{G2S} = \text{Parameter}$   
 amp. B


**Drain current  $I_D = f(V_{GG})$  amp. A**

$V_{DS} = 5V, V_{G2S} = 4V, R_{G1} = 60k\Omega$


(connected to  $V_{GG}$ ,  $V_{GG} = \text{gate1}$  supply voltage)



**Drain current  $I_D = f(V_{GG})$  amp. B**

$V_{DS} = 5V, V_{G2S} = 4V, R_{G1} = 50k\Omega$


(connected to  $V_{GG}$ ,  $V_{GG} = \text{gate1}$  supply voltage)

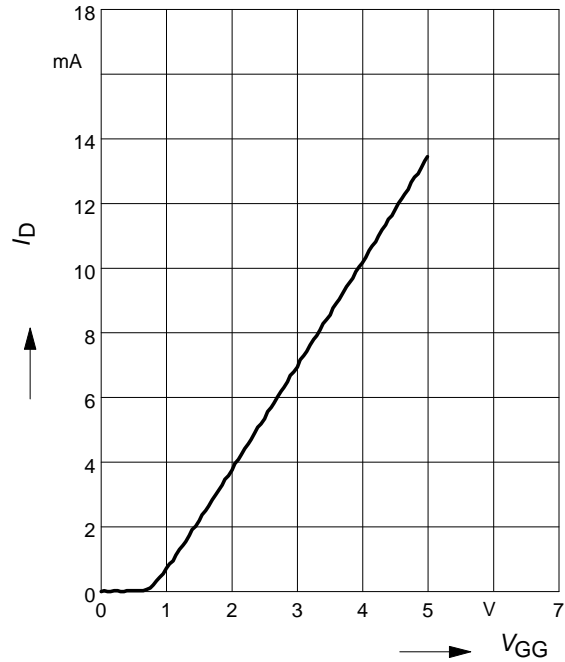

**Drain current  $I_D = f(V_{GG})$**

$V_{G2S} = 4V, R_{G1} = \text{Parameter in } k\Omega$


amp. A

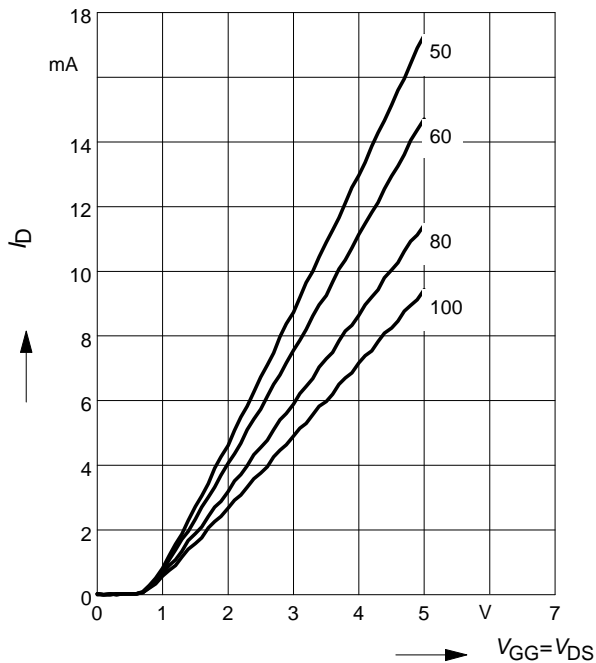

**Drain current  $I_D = f(V_{GG})$**

$V_{G2S} = 4V, R_{G1} = \text{Parameter in } k\Omega$


amp. B

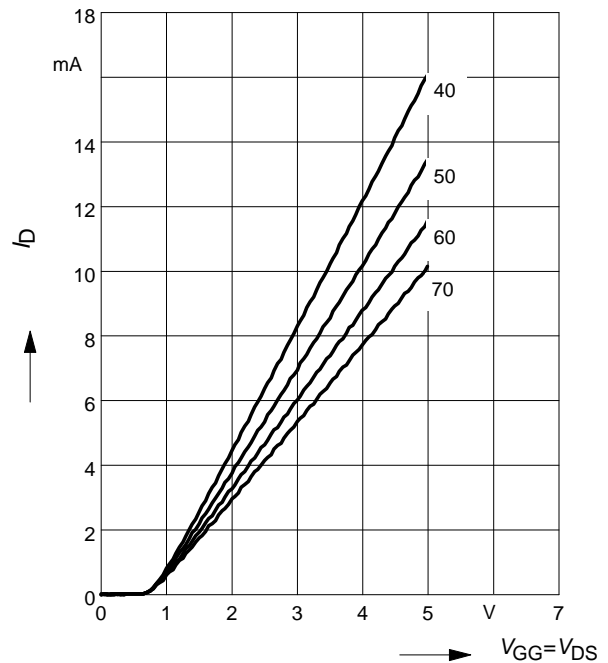




**Crossmodulation  $V_{unw} = (AGC)$** 
 $V_{DS} = 5\text{ V}, R_{g1} = 68\text{ k}\Omega$ 


amp.A

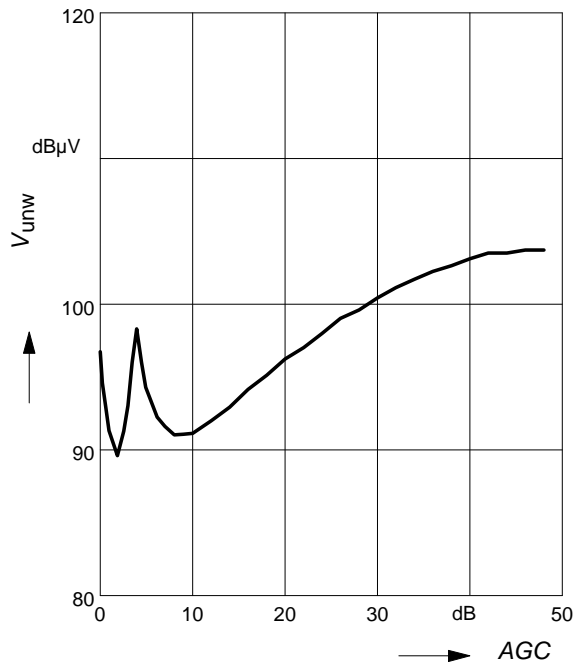
**Crossmodulation  $V_{unw} = (AGC)$** 
 $V_{DS} = 5\text{ V}, R_{g1} = 56\text{ k}\Omega$ 


amp.B

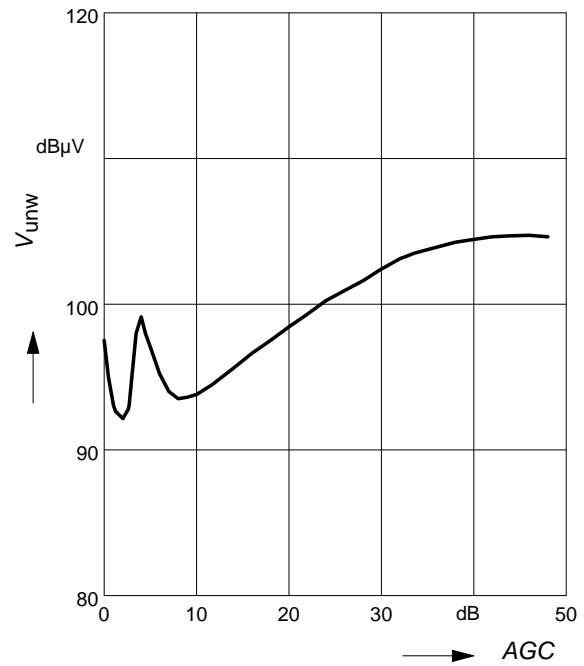


Crossmodulation test circuit

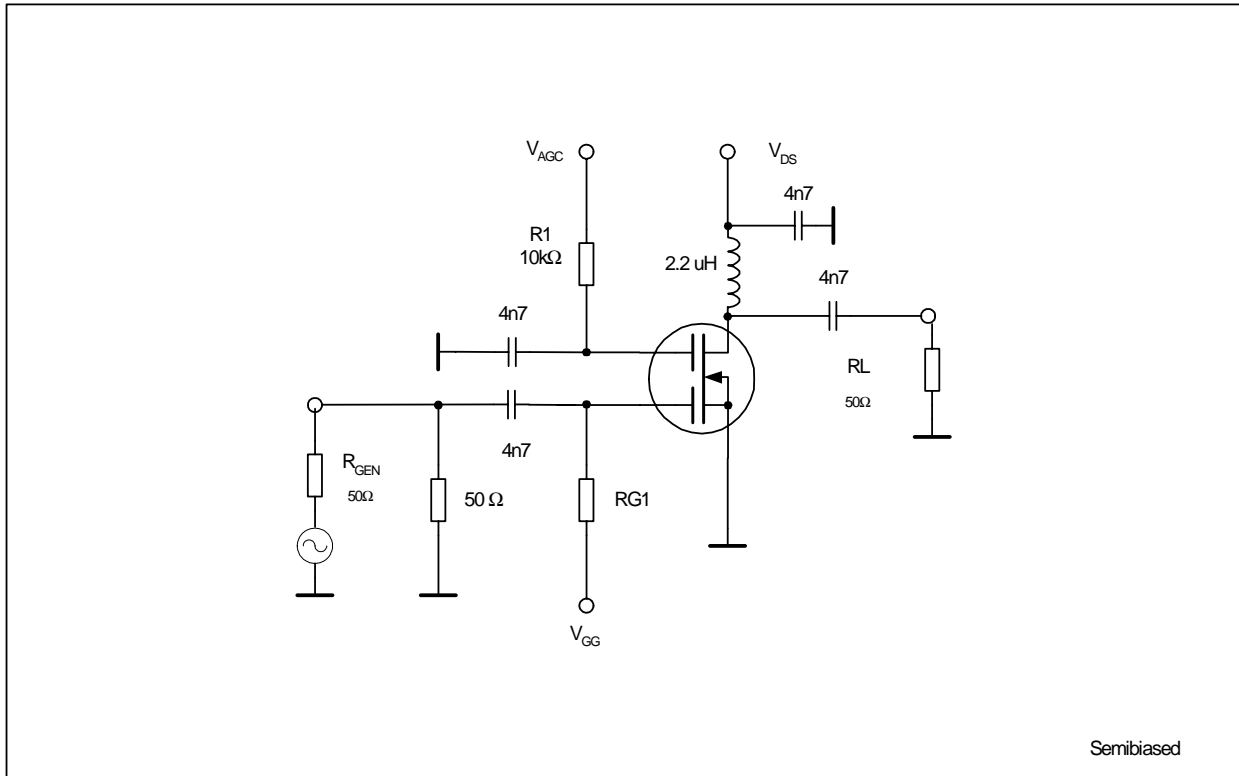

Package Outline

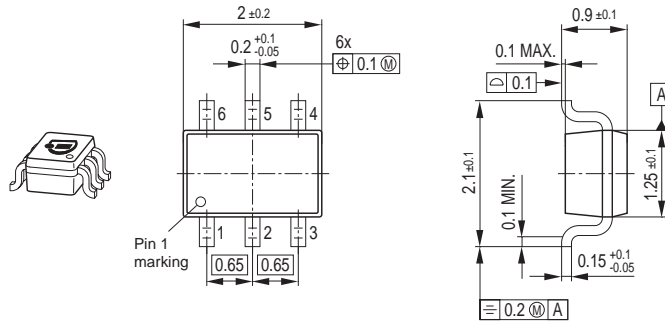


Foot Print



Marking Layout (Example)


Small variations in positioning of Date code, Type code and Manufacture are possible.

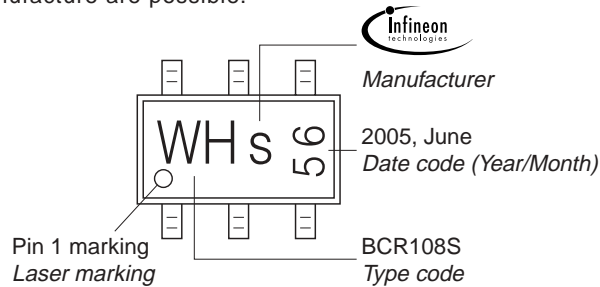

Standard Packing

Reel  $\varnothing 180$  mm = 3.000 Pieces/Reel  
 Reel  $\varnothing 330$  mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

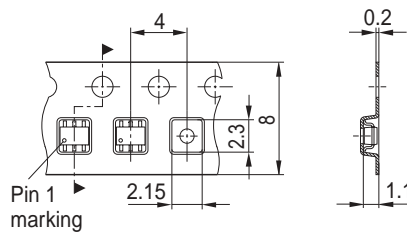

Edition 2006-02-01  
Published by  
Infineon Technologies AG  
81726 München, Germany  
© Infineon Technologies AG 2007.  
All Rights Reserved.

### **Attention please!**

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.