

Data Sheet

Description

The μ PD75116(A) is one of the 4-bit single-chip microcomputer 75X series.

The μ PD75116(A) is a product with the extended ROM capacity of the μ PD75108(A). In addition of high-speed operations, it can manipulate data in units of 1, 4 and 8 bits. In particular, the I/O operation of the μ PD75116 have been improved by a wide variety of bit control instructions. The μ PD75116 is provided with interface inputs/outputs with peripheral circuits having different power voltages, and analog inputs and suitable for controlling automobile electrical equipment, etc. For the μ PD75116(A), an on-chip pin-compatible one-time PROM product (μ PD75P116) is separately available for system development evaluation.

Functions are described in detail in the following User's Manual, which should be read when carrying out design work.

μ PD751XX Series User's Manual: IEM-992

Features

- Higher reliability than μ PD75116
- Architecture "75X" equivalent to 8-bit microcomputer
- Minimum instruction execution time (high-speed operation): 0.95 μ s (when operated at 4.19 MHz and 5 V)
- Instruction execution variable function: 0.95 μ s/1.91 μ s/15.3 μ s (when operated at 4.19 MHz)
- Many input/output ports: 58
- 3-channel on-chip 8-bit timers
- 8-bit on-chip serial interface
- Multi-interruptible vector interrupt function

Applications

Automobile electrical equipment, etc.

| Ordering Code | Package | Quality Grade |
|-----------------------------|--|---------------|
| μ PD75112CW(A)-XXXX | 64-pin plastic shrink DIP (750 mil) | Special |
| μ PD75112GF(A)-XXXX-3BE | 64-pin plastic QFP (14 × 20 mm) | Special |
| μ PD75116CW(A)-XXXX | 64-pin plastic shrink DIP (750 mil) | Special |
| μ PD75116GF(A)-XXXX-3BE | 64-pin plastic QFP (14 × 20 mm) | Special |

Remarks: XXXX is a ROM code number.

Please refer to "Quality Grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

Unless there are any particular functional differences, the μ PD75116(A) is described in this document as a representative product.

The information in this document is subject to change without notice.

The mark ★ shows major revised points.

μPD75112(A), 75116(A)**Defferences between μPD75112(A), 75116(A) and μPD75112, 75116**


| Item | Product Name | μPD75112(A), 75116(A) | μPD75112, 75116 |
|---------------------------|--------------------------|--|-----------------|
| Quality grade | Special | | Standard |
| Electrical specifications | Absolute maximum ratings | Different high-level output current and low-level output current | |
| | DC characteristics | Different low-level output voltage | |
| Direct LED drive | Not possible | | Possible |

Outline of Functions


| Item | Description |
|---------------------------------|---|
| No. of basic instruction | 43 |
| Min. instruction execution time | 0.95 μ s/1.91 μ s/15.3 μ s (when operated at 4.19 MHz), switchable at 3 levels |
| On-chip memory | 12160 \times 8 (<i>μPD75112(A)</i>), 16256 \times 8 (<i>μPD75116(A)</i>) |
| | RAM 512 \times 4 |
| General register | 4 bits \times 8 \times 4 banks (memory mapping) |
| Accumulator | Three accumulated in compliance with controlled date lengths • 1-bit accumulator (CY), 4-bit accumulator (A), 8-bit accumulator (XA) |
| Input/output port | 58 in total • CMOS input pin : 10 • CMOS input/output pin (LED direct drive enable) : 32 • Intermediate withstand voltage N-ch open drain : 12 input/output pin (bit-wise pull-up resistor incorporation possible) • Comparator input pin (4-bit accuracy) : 4 |
| Timer/counter | • 8-bit timer/event counter \times 2 • 8-bit basic interval timer (applicable to watchdog timer) |
| Serial interface | • 8-bits • First LSB/first MSB switchable • Two transfer modes (transmit and receiver/receive dedicated mode) |
| Vector interrupt | External : 3, Internal : 4 |
| Test input | External : 2 |
| Standby | • STOP/HALT mode |
| Operating temperature range | -40 to +85°C |
| Operating voltage | 2.7 to 6.0 V |
| Others | • On-chip power-on reset circuit (mask option) • On-chip bit contol memory (bit sequential buffer) |
| Package | • 64-pin plastic shrink DIP (750 mil) • 64-pin plastic QFP (14 \times 20 mm) |

CONTENTS

| | |
|--|-----------|
| 1. Pin Configuration (Top View)..... | 4 |
| 2. Block Diagram..... | 6 |
| 3. Pin Functions..... | 7 |
| 3.1 Port Pins..... | 7 |
| 3.2 Non-Port Pins..... | 8 |
| 3.3 Pin Input/Output Circuits..... | 9 |
| 3.4 Recommended Connection of Unused Pins..... | 10 |
| 3.5 Caution Relating to Use of P00/INT4 Pin and RESET Pin..... | 10 |
| 4. Memory Configuration..... | 11 |
| 5. Peripheral Hardware Functions..... | 14 |
| 5.1 Digital Input/Output Port..... | 14 |
| 5.2 Clock Generator..... | 14 |
| 5.3 Clock Output Circuit..... | 16 |
| 5.4 Basic Interval Timer..... | 16 |
| 5.5 Timer/Event Counter..... | 17 |
| 5.6 Serial Interface..... | 19 |
| 5.7 Programmable Threshold Port (Analog Input Port)..... | 21 |
| 5.8 Bit Sequential Buffer..... | 22 |
| 5.9 Power-On Flag (Mask Option)..... | 22 |
| 6. Interrupt Functions..... | 23 |
| 7. Standby Functions | 25 |
| 8. Reset Functions..... | 26 |
| 9. Instruction Set..... | 29 |
| 10. Mask Option Selection..... | 37 |
| 11. Electrical Specifications..... | 38 |
| 12. Package Information | 48 |
| 13. Recommended Soldering Conditions | 51 |
| APPENDIX A. Differences between μPD751xx(A) Series Products and Related PROM Products..... | 52 |
| APPENDIX B. Development Tools | 53 |
| APPENDIX C. Related Documentations | 54 |

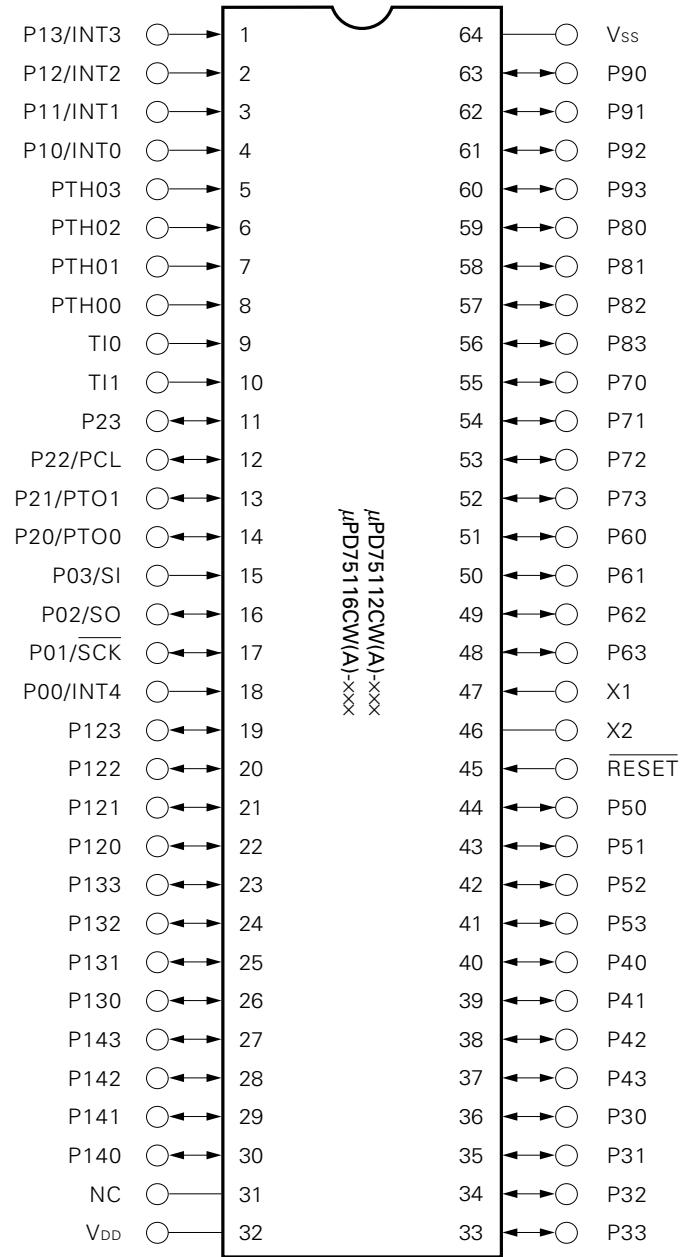μPD75112(A), 75116(A)**1. Pin Configuration (Top View)****64-Pin Plastic Shrink DIP (750 mil)**

64-Pin Plastic QFP (14 × 20 mm)

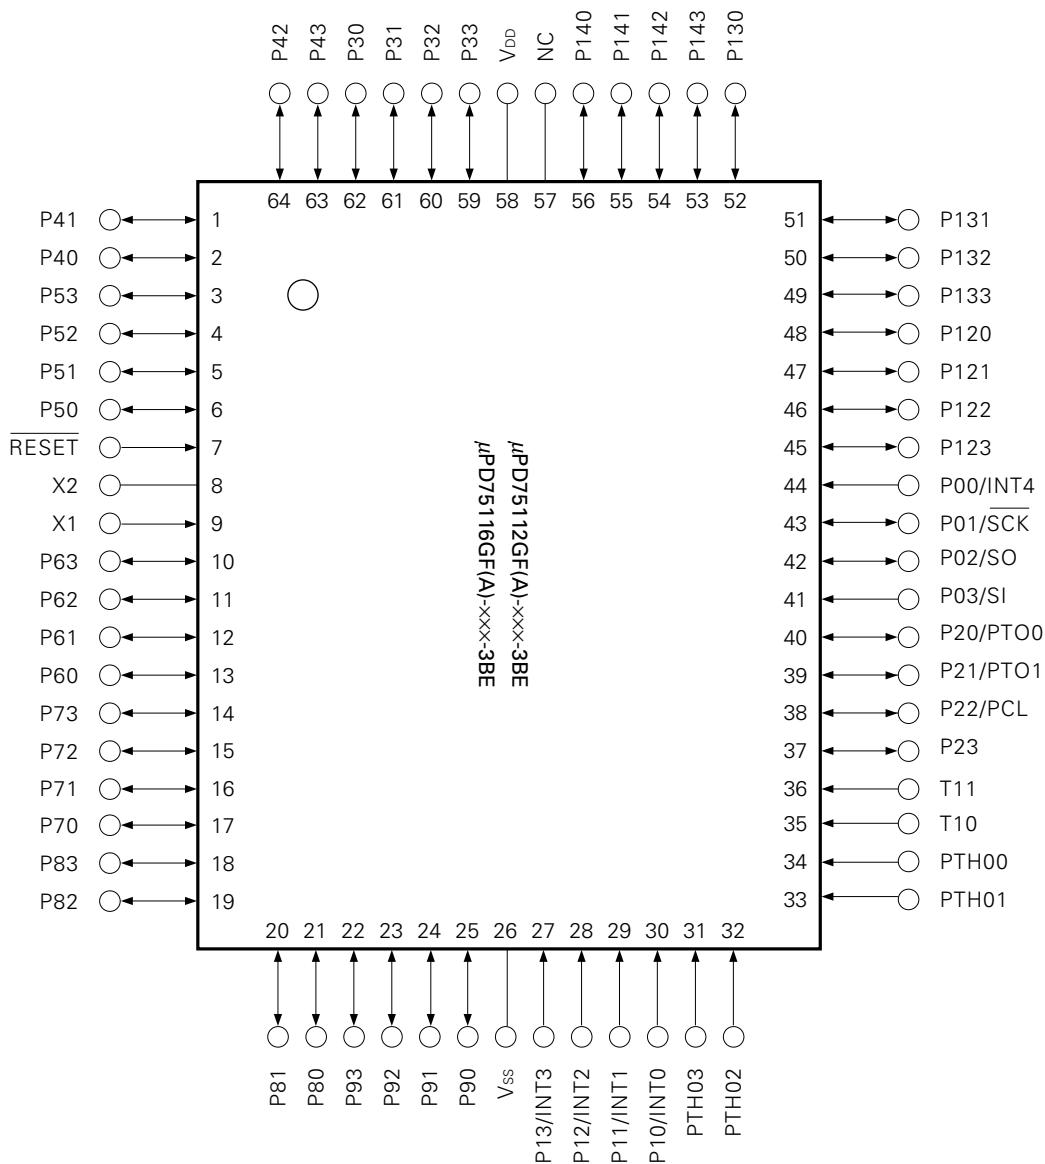


Pin Name ★

| | | | |
|-----------|----------|------------------|-------------------------------------|
| P00-P03 | : Port0 | SCK | : Serial Clock |
| P10-P13 | : Port1 | SO | : Serial Output |
| P20-P23 | : Port2 | SI | : Serial Input |
| P30-P33 | : Port3 | PTO0, PTO1 | : Programmable Timer Output |
| P40-P43 | : Port4 | PCL | : Programmable Clock |
| P50-P53 | : Port5 | PTH00-PTH03 | : Programmable Threshold Input |
| P60-P63 | : Port6 | INT0, INT1, INT4 | : External Vectored Interrupt Input |
| P70-P73 | : Port7 | INT2, INT3 | : External Test Input |
| P80-P83 | : Port8 | T10, T11 | : Timer Input |
| P90-P93 | : Port9 | X1, X2 | : Clock Oscillation |
| P120-P123 | : Port12 | RESET | : Reset |
| P130-P133 | : Port13 | NC | : No Connection |
| P140-P143 | : Port14 | V _{DD} | : Positive Power Supply |
| | | V _{SS} | : Ground |

NEC

μ PD75112(A), 75116(A)

2. Block Diagram

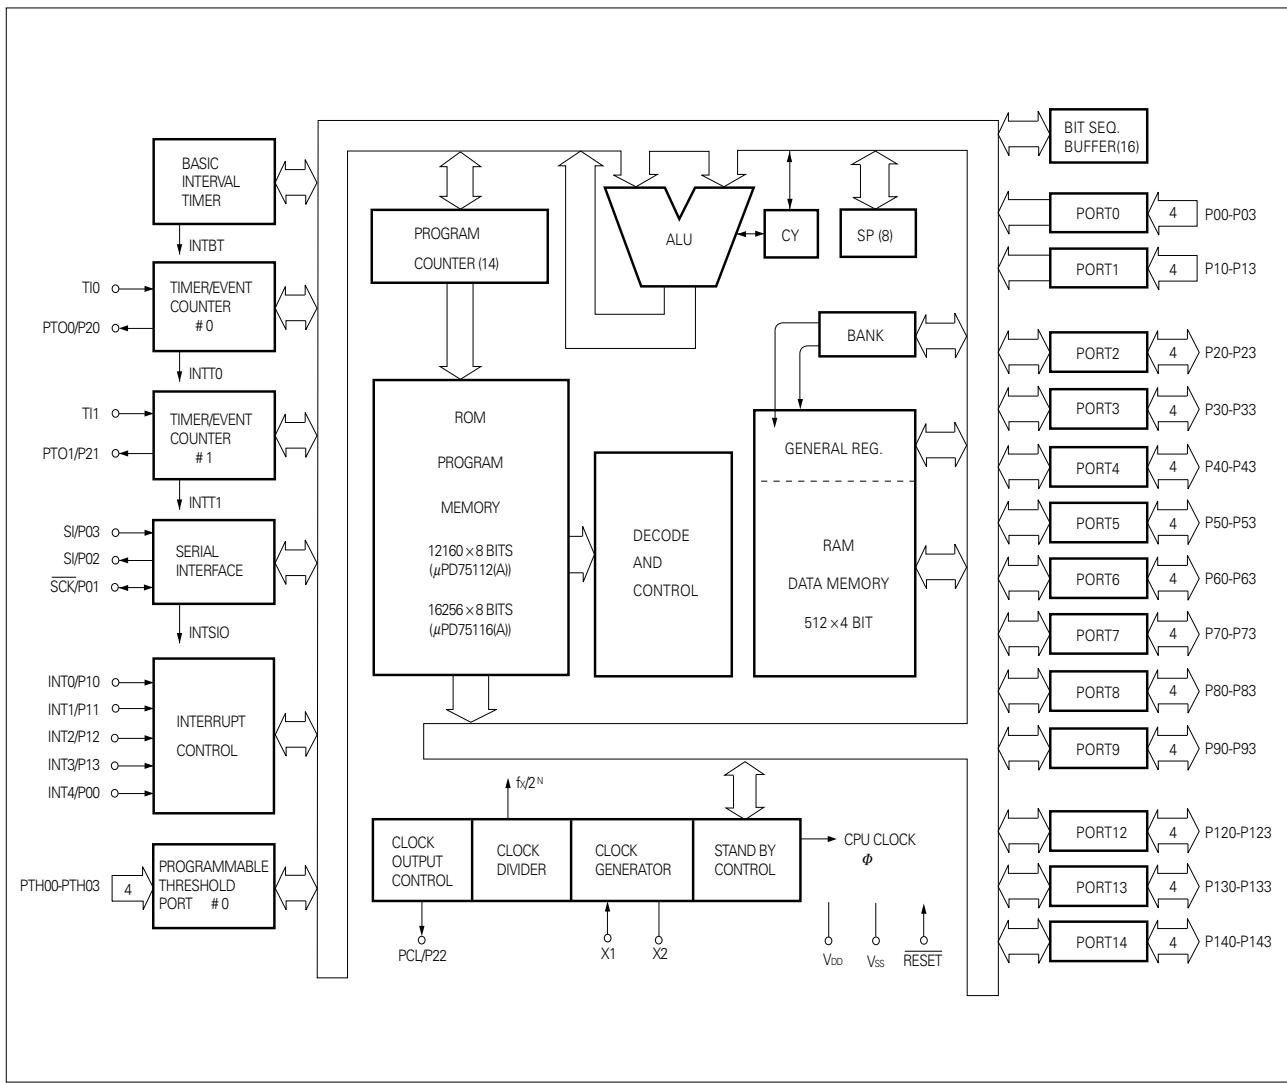

3. Pin Functions

3.1 Port Pins

| Pin Name | Input/ Output | Dual Function Pin | Function | 8-Bit I/O | At Reset | I/O Circuit Type *1 |
|--------------|---------------|-------------------|---|-----------|----------|---------------------|
| P00 | Input | INT4 | 4-bit input port (PORT0) | x | Input | (B) |
| P01 | Input/output | SCK | | | | (F) |
| P02 | Input/output | SO | | | | E |
| P03 | Input | SI | | | | (B) |
| P10 | Input | INT0 | 4-bit input port (PORT1) | | Input | (B) |
| P11 | | INT1 | | | | |
| P12 | | INT2 | | | | |
| P13 | | INT3 | | | | |
| P20 | Input/output | PT00 | 4-bit input/output port (PORT2) | x | Input | E |
| P21 | | PT01 | | | | |
| P22 | | PCL | | | | |
| P23 | | — | | | | |
| P30 to P33 | Input/output | — | Programmable 4-bit input/output port (PORT3) Bit-wise input/output setting enable | | Input | E |
| P40 to P43 | Input/output | — | 4-bit input/output port (PORT4) | | | E |
| P50 to P53 | Input/output | — | 4-bit input/output port (PORT5) | | Input | E |
| P60 to P63 | Input/output | — | Programmable 4-bit input/output port (PORT6) Bit-wise input/output setting enable | | | E |
| P70 to P73 | Input/output | — | 4-bit input/output port (PORT7) | | Input | E |
| P80 to P83 | Input/output | — | 4-bit input/output port (PORT8) | | | E |
| P90 to P93 | Input/output | — | 4-bit input/output port (PORT9) | | Input | E |
| P120 to P123 | Input/output | — | N-ch open drain 4-bit input/ output port (PORT12) Bit-wise pull-up resistor incorporation enable (mask option) 2 V withstand for open drain | | Input*2 | M |
| P130 to P133 | Input/output | — | N-ch open drain 4-bit input/ output port (PORT13) Bit-wise pull-up resistor incorporation enable (mask option) 12 V withstand for open drain | | | M |
| P140 to P143 | Input/output | — | N-ch open drain 4-bit input/output port (PORT14) Bit-wise pull-up resistor incorporation enable (mask option) 12 V withstand for open drain | — | Input*2 | M |

* 1: Circles indicate Schmitt trigger inputs.

2: High impedance for open drain

High level for on-chip pull-up resistors

μ PD75112(A), 75116(A)**3.2 Non-Port Pins**

| | Input/Output | Dual Function Pin | Function | At Reset | I/O Circuit Type*1 |
|----------------|--------------|-------------------|--|----------|--------------------|
| PTH00 to PTH03 | Input | — | Threshold voltage variable 4-bit analog input port. | | N |
| TI0 | Input | — | External event pulse input for the timer/event counter or edge detect vector interrupt input. 1-bit input enable. | | (B) |
| TI1 | | | | | |
| PTO0 | Input/output | P20 | Timer/event counter output. | Input | E |
| PTO1 | | P21 | | | |
| SCK | Input/output | P01 | Serial clock input/output. | Input | (F) |
| SO | Input/output | P02 | Serial data output. | Input | E |
| SI | Input | P03 | Serial data input. | Input | (B) |
| INT4 | Input | P00 | Edge detect vector interrupt input (for detecting both rising and falling edges). | Input | (B) |
| INT0 | Input | P10 | Edge detect vector interrupt input (detected edge selectable). | Input | (B) |
| INT1 | | P11 | | | |
| INT2 | Input | P12 | Edge detect testable input (for rising edge detection). | Input | (B) |
| INT3 | | P13 | | | |
| PCL | Input/output | P22 | Clock output. | Input | E |
| X1, X2 | | — | Crystal/ceramic connect pin (system clock oscillation). In case with the external clock, input a signal to X1 and the antiphase to X2. | | |
| RESET | Input | — | System reset input (low level active). | | (B) |
| NC*2 | — | — | No Connection | | |
| VDD | | — | Positive power supply. | | |
| Vss | | — | GND potential. | | |


* 1: Circles indicate Schmitt trigger inputs.

2: When the PWB is shared with the μ PD75P116, connect the NC pin to VDD directly.

3.3 Pin Input/Output Circuits

μ PD75116(A) pin input/output circuit are shown in schematic form.

Figure 3-1 Pin Input/Output Circuits

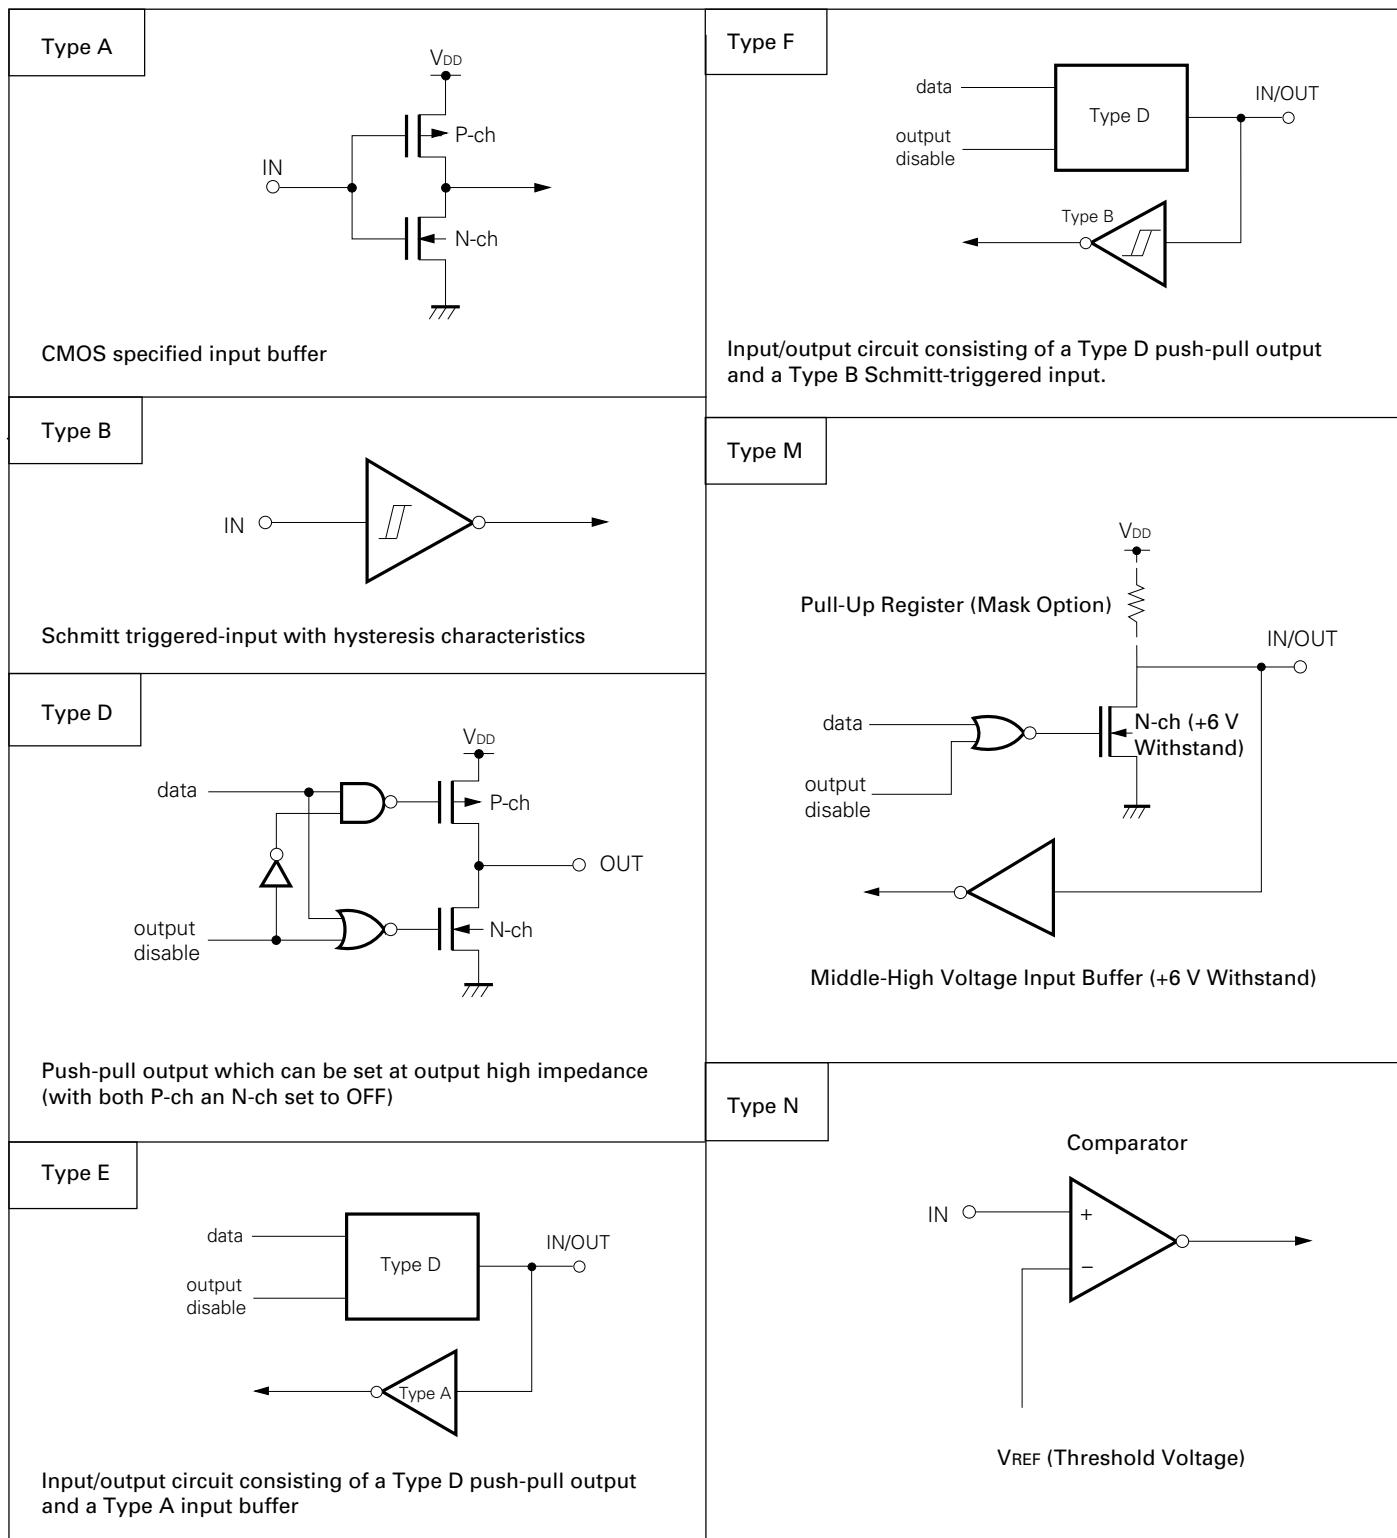

μ PD75112(A), 75116(A)

3.4 Recommended Connection of Unused Pins

| Pin | Recommended Connecting Method |
|----------------|--|
| PTH00 to PTH03 | Connect to Vss or VDD |
| TI0 | |
| TI1 | |
| P00 | Connect to Vss |
| P01 to P03 | Connect to Vss or VDD |
| P10 to P13 | Connect to Vss |
| P20 to P23 | Input state : Connect to Vss or VDD Output state : Leave open |
| P30 to P33 | |
| P40 to P43 | |
| P50 to P53 | |
| P60 to P63 | |
| P70 to P73 | |
| P80 to P83 | |
| P90 to P93 | |
| P120 to P123 | |
| P130 to P133 | |
| P140 to P143 | |
| RESET | Connect to VDD*1 |
| NC | Leave open or connect to VDD*2 |

*1: Only when a power-on reset generator is built in by mask option, connect to VDD.

2: When the PWB is shared with the μ PD75P116, connect the NC pin to VDD directly.

3.5 Caution Relating to Use of P00/INT4 Pin and RESET Pin


In addition to the functions described in sections 3.1 and 3.2, the P00/INT4 pin and the RESET pin have the function to set the IC test mode for testing the μ PD75116(A) internal operations.

When a voltage larger than VDD is applied to one of these two pins, the test mode is set. Thus, if noise exceeding VDD is applied even during normal operations, the test mode is set and normal operations may be discontinued.


For example, if a cable from the P00/INT4 or RESET pin is too long, inter-wiring noise may be applied to the pin, the pin voltage may become larger than VDD, causing malfunctioning.

Thus, carry out wiring to minimize inter-wiring noise. If the noise cannot be suppressed completely, carry out the following countermeasure against noise using an externally mounted component.

- o Connect a diode with low VF (max 0.3 V) between VDDS

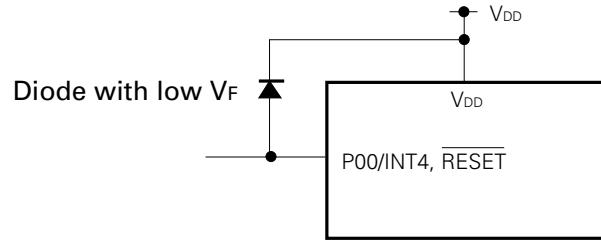

- o Connect a capacitor between VDDS

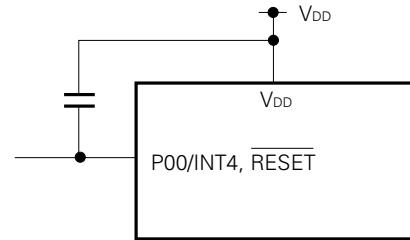


4. Memory Configuration

- Program Memory (ROM)
 - 12160×8 bits (0000H to 2F7FH): μ PD75112(A)
 - 16256×8 bits (0000H to 3F7FH): μ PD75116(A)
 - 0000H to 0001H: Vector table for writing the program start address by reset
 - 0002H to 000BH: Vector table for writing the program start address by interrupt


- 0020H to 007FH: Table area to be referred to by the GETI instruction
- Data Memory
 - Data area
 512×4 bits (000H to 1FFH)
 - Peripheral hardware area
 128×4 bits (F80H to FFFFH)

Figure 4-1 Program Memory Map (μ PD75112(A))

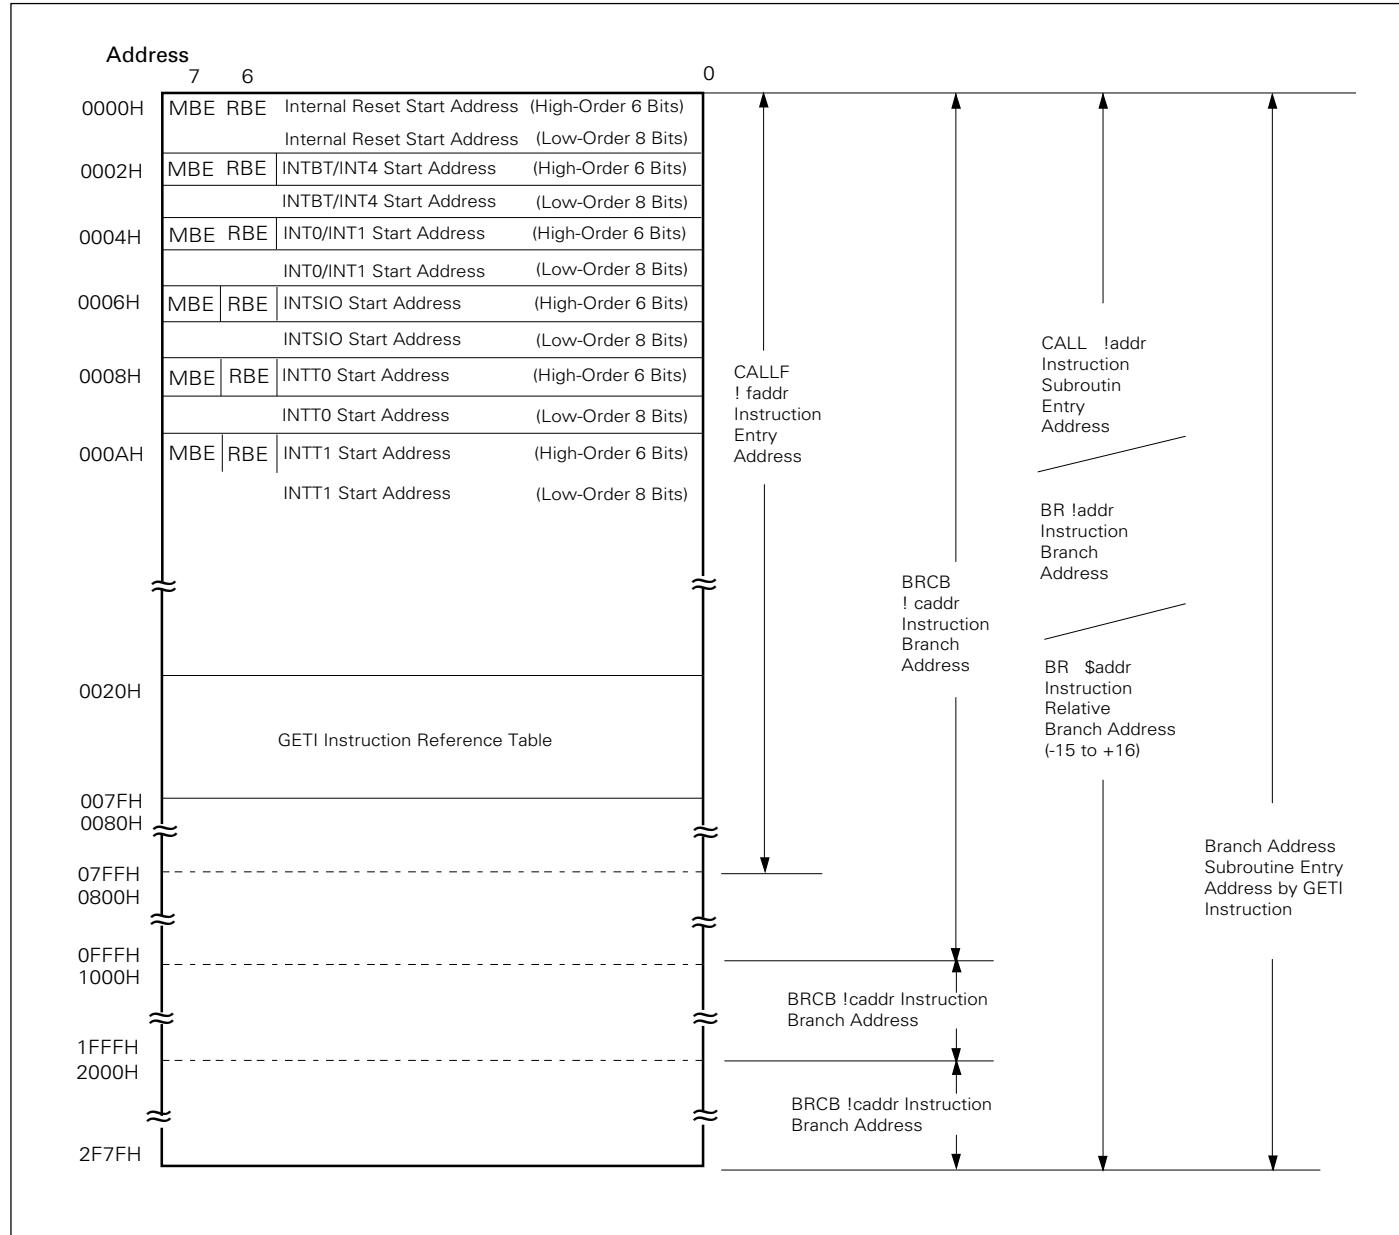


Remarks: In all other cases, the program can be branched by the BR PCDE and BR PCXA

instructions to an address with only the lower 8 bits of PC changed.

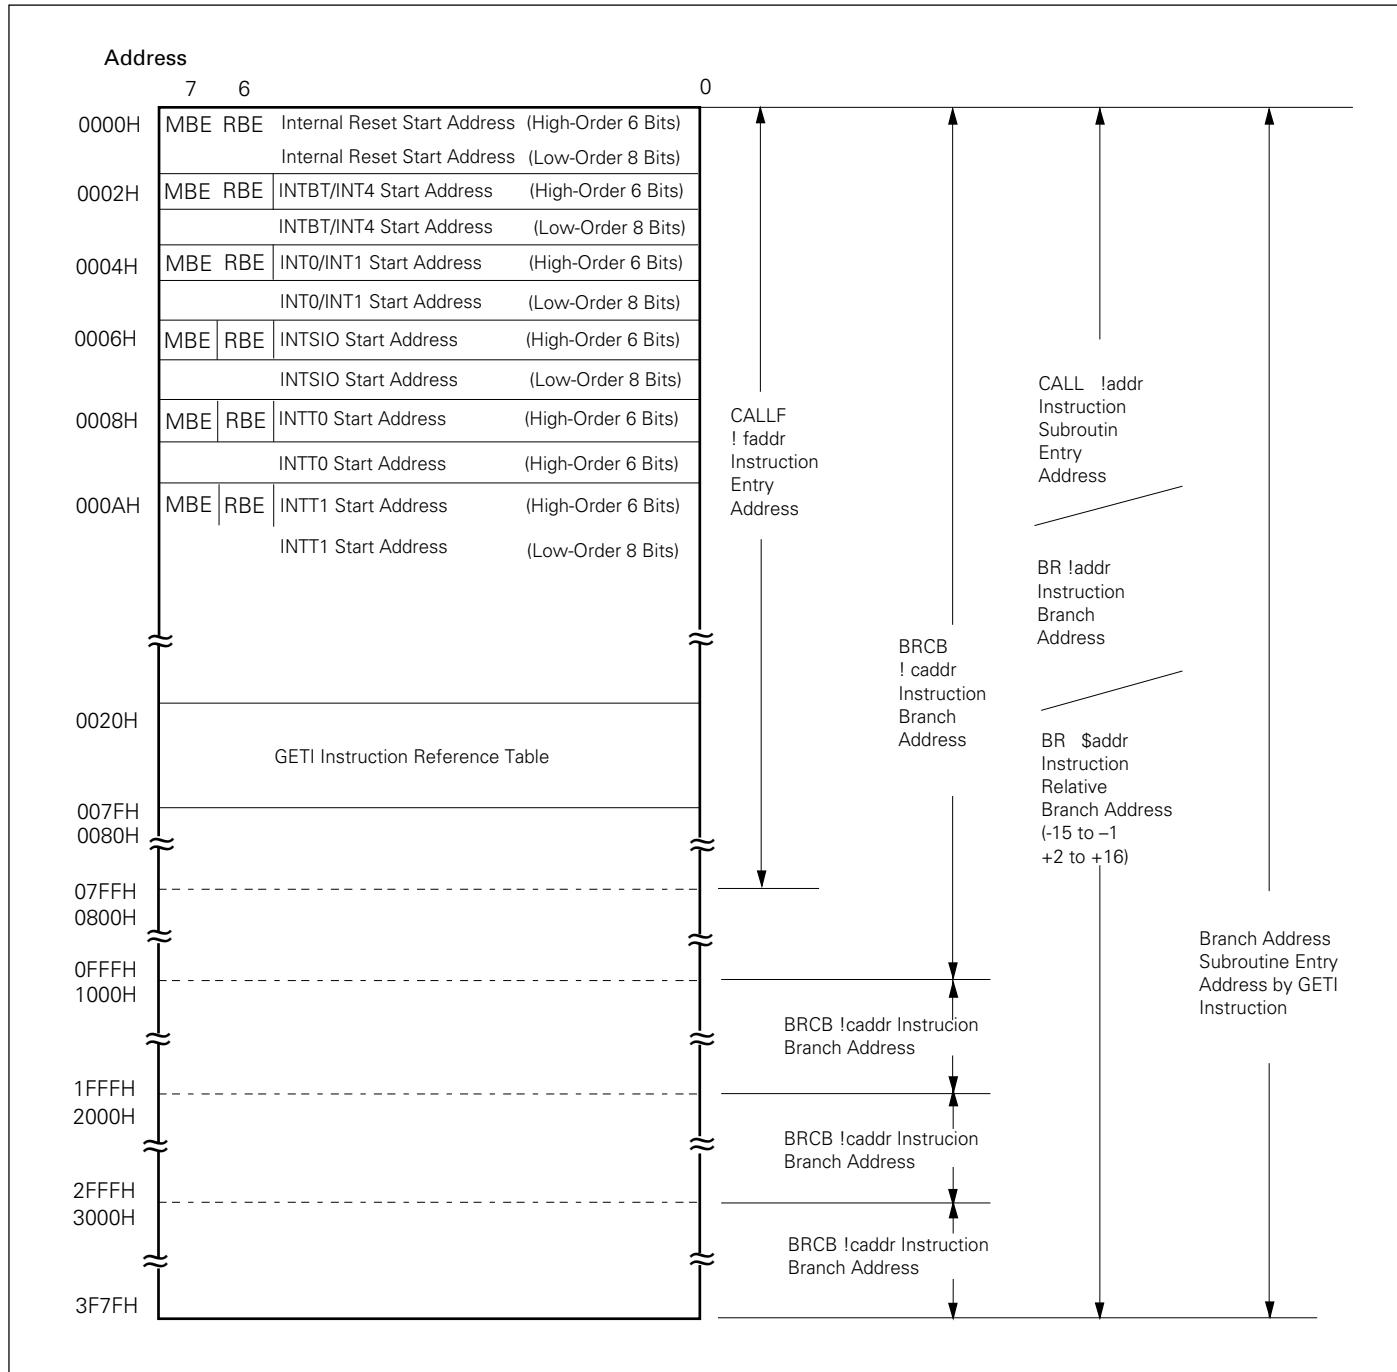μ PD75112(A), 75116(A)**Figure 4-2 Program Memory Map (μ PD75116(A))**

Remarks: In all other cases, the program can be branched by the BR PCDE and BR PCXA instructions to an address with only the lower 8 bits of PC changed.

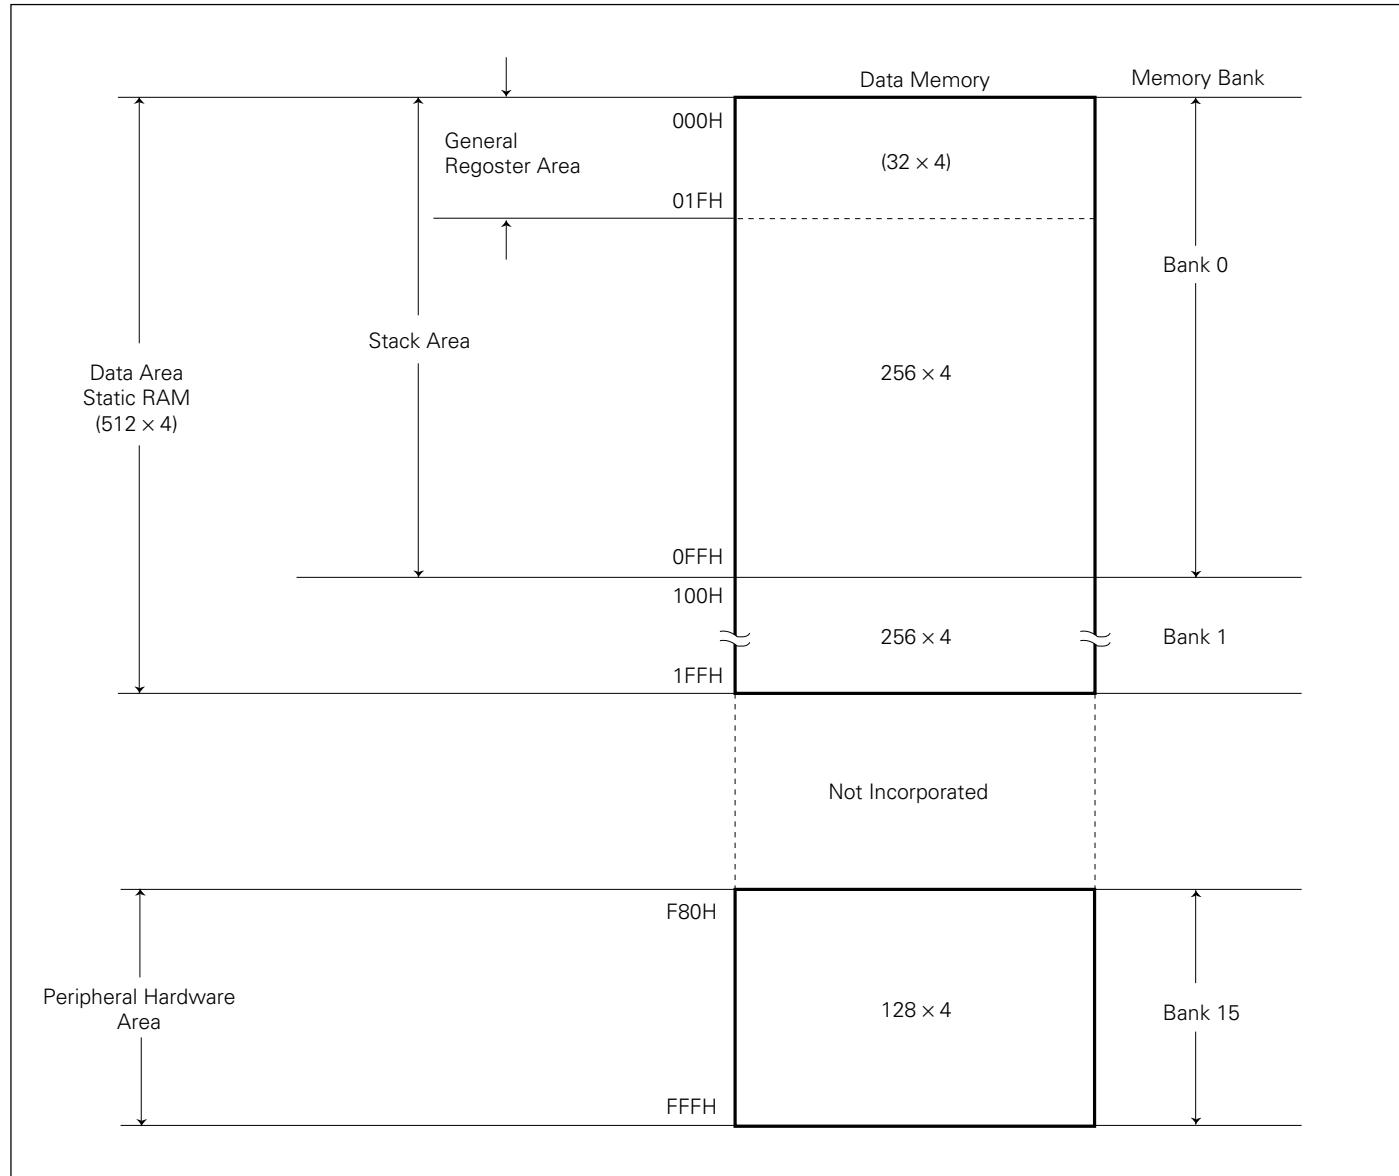Figure 4-3 Data Memory Map

5. Peripheral Hardware Functions

5.1 Digital Input/Output Port

The digital input/output port has the following tree types.

- CMOS input (PORT0, 1) : 8
- CMOS input/output (PORT 2 to PORT 9) : 32
- N-ch open-drain input/output (PORT 12 to PORT 14): 12

| | |
|-------|----|
| Total | 52 |
|-------|----|

Table 5-1 Functions of Digital Ports

| Port (Code) | Functions | Operations and Features | Remarks |
|--|---|---|---|
| PORT0 PORT1 | 4-bit input | Read or test always enable irrespectively of the operating mode of dual-function pins. | Share the pins with SI, SO, SCK and INT0 to 4. |
| PORT3 PORT6 | 4-bit input/ output | Can be set bit-wise to the input or output mode. | ————— |
| PORT2 PORT4 PORT5 PORT7 PORT8 PORT9 | | Can be set in 4-bit units to the input or output mode. Ports 4 and 5, 6 and 7, 8 and 9 can form pairs and data can be input/output in 8-bit units. | Port 2 shares the pin with PTO0, PTO1 and PCL. |
| PORT12 PORT13 PORT14 | 4-bit input/ output (N-ch open- drain, 12 V withstand voltage) | Can be set in 4-bit units the input or output mode. Ports 12 and 13 can form a pair and data can be input/output in 8-bit units. | On-chip pull-up registers can be specified bit-wise by mask option. |


5.2 Clock Generator

The clock generator is a circuit which supplies the CPU and peripheral hardware with various clocks and controls the CPU operating mode.

The instruction execution time can be changed.

- 0.95 μ s/1.91 μ s/15.3 μ s (at 4.19 MHz operation)

Figure 5-1 Block Diagram of Clock Generator ★

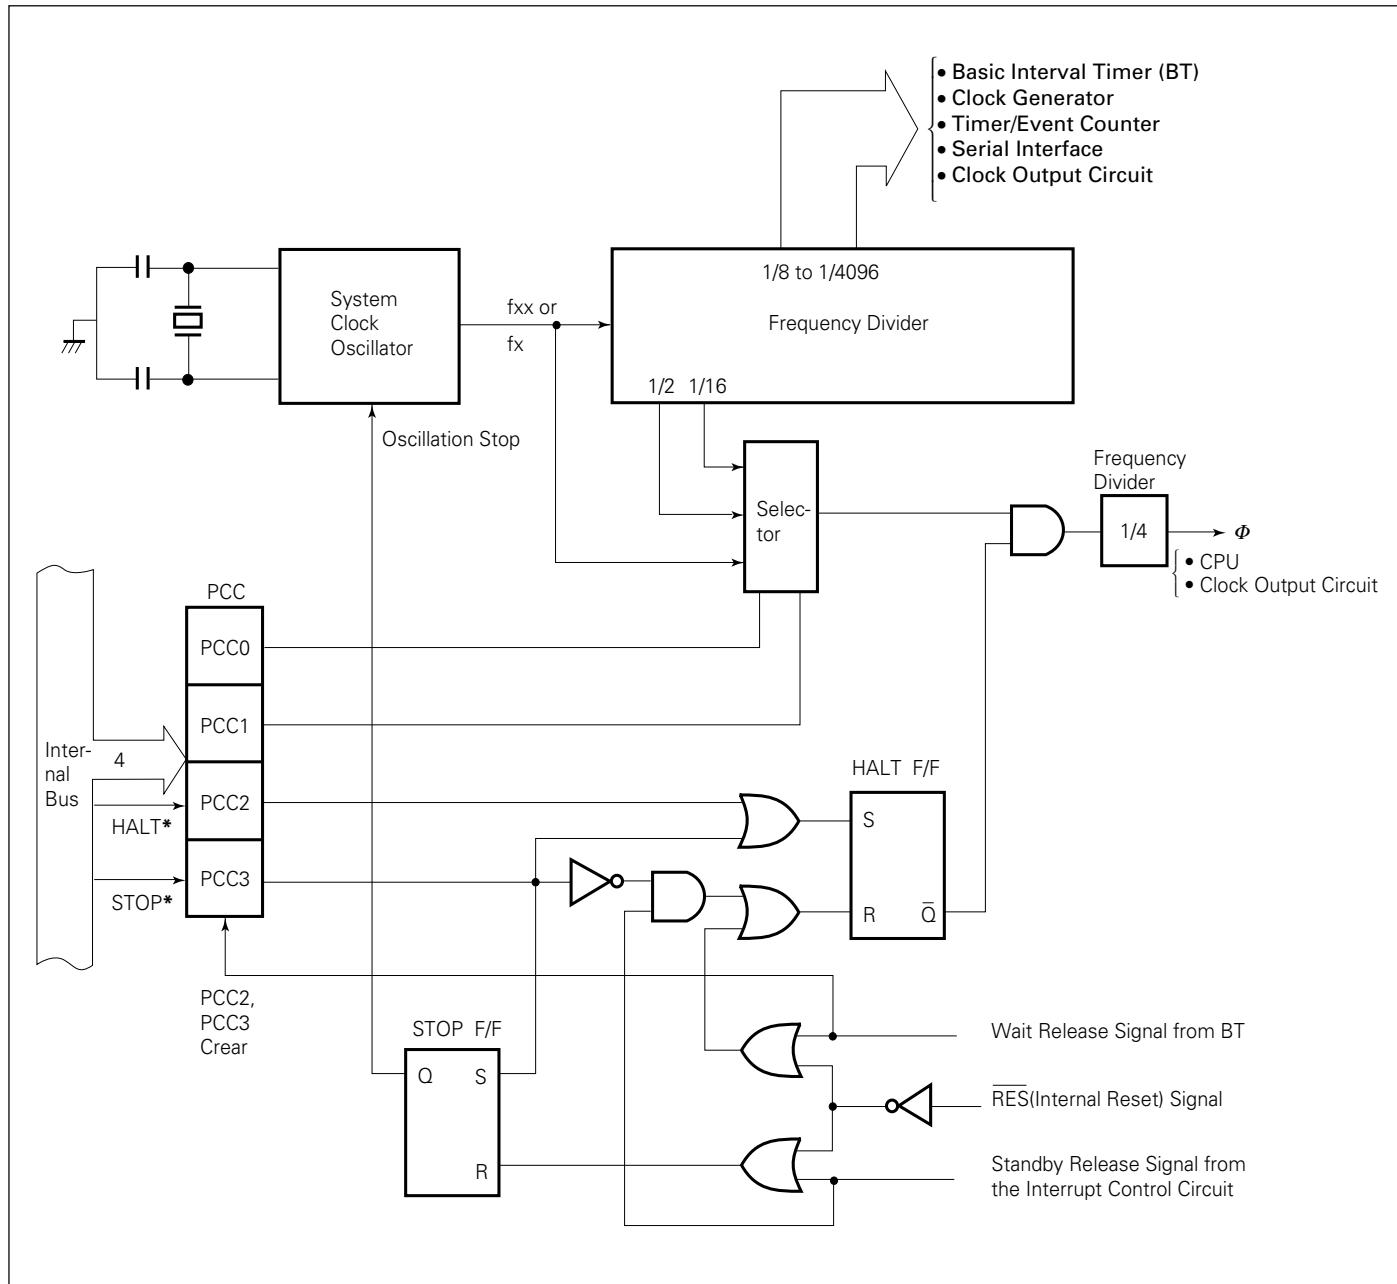

- Remarks**
- 1: f_{xx} =crystal/ceramic oscillator frequency.
 - 2: f_x =external clock frequency.
 - 3: ϕ =CPU clock
 - 4: *indicates instruction execution.
 - 5: PCC (processor clock control register)
 - 6: 1 clock cycle (tcy) of ϕ is 1 machine cycle of the instruction. For tcy, see the AC characteristics in the 11."Electrical Specifications".


μ PD75112(A), 75116(A)**5.3 Clock Output Circuit**

The clock output circuit is a circuit to generate clock pulses from the P22/PCL pin. It is used to supply the peripheral LSIs with clock pulses.

- Clock output (PCL): ϕ , 524 kHz, 262 kHz (at 4.19 MHz operation)

The clock output circuit configuration is shown as the following.


Figure 5-2 Clock Output Circuit Configuration

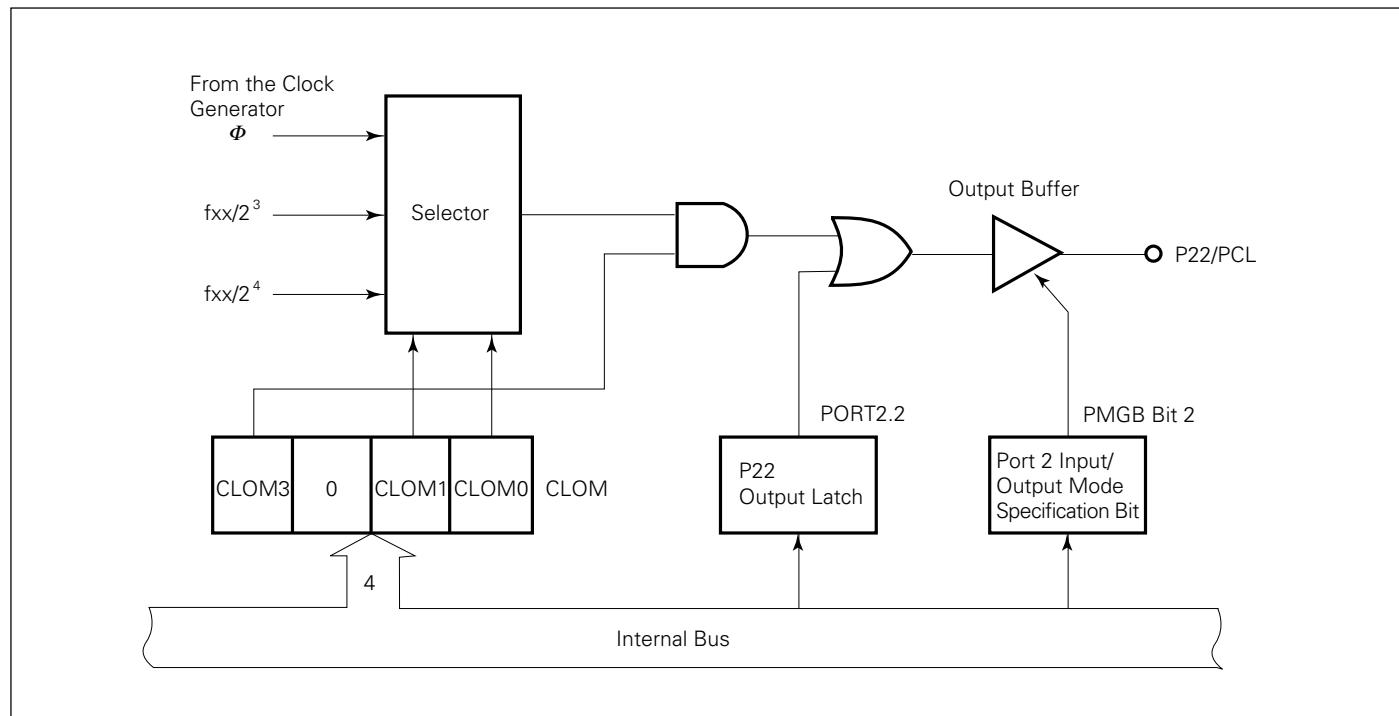**5.4 Basic Interval Timer**

The basic interval timer has the following functions;

- Interval timer operation to generate reference time interrupts
- Watchdog timer application to detect program overrun
- Wait time selection and count when the standby mode is released
- Count content read

Figure 5-3 Basic Interval Timer Configuration

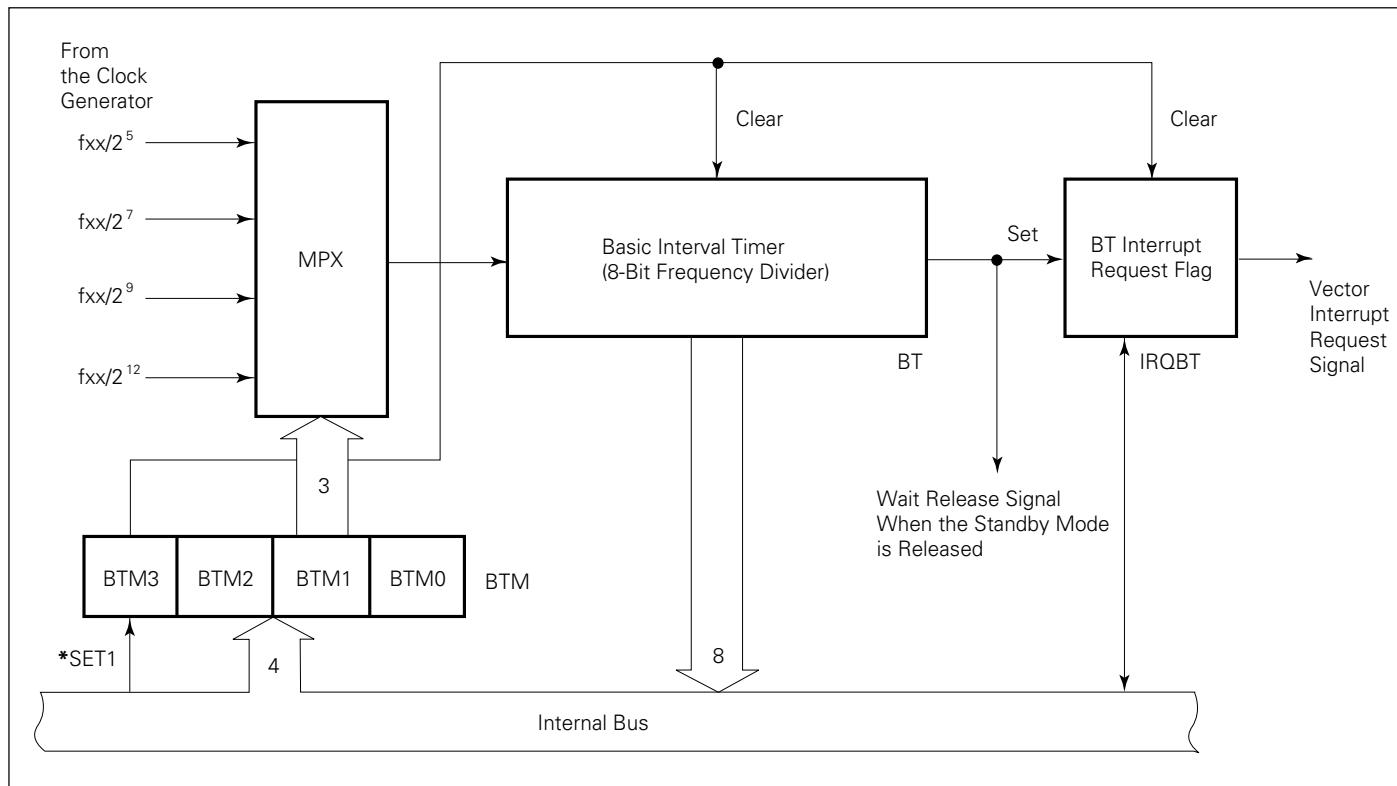

Remark: * indicates instruction execution.

5.5 Timer/Event Counter


The μ PD75116(A) has a two-channel on-chip timer/event counters.

Channels 0 and 1 of the timer/event counter have the same configuration and functions. They differ only in the selectable count pulse (CP) and the function of supplying clocks to the serial interface.

The timer/event counter has the following functions:

- Programmable interval timer operation
- Output of square wave having any selected frequency to PTOn pin
- Event counter operation
- Use of TIn pin as an external interrupt input pin
- Output of TIn pin input divided by N to PTOn pin (frequency divider operation)
- Serial shift clock supply to the serial interface circuit (channel 0 only)
- Count status read function

Figure 5-4 Block Diagram of Timer/Event Counter ($n=0, 1$)

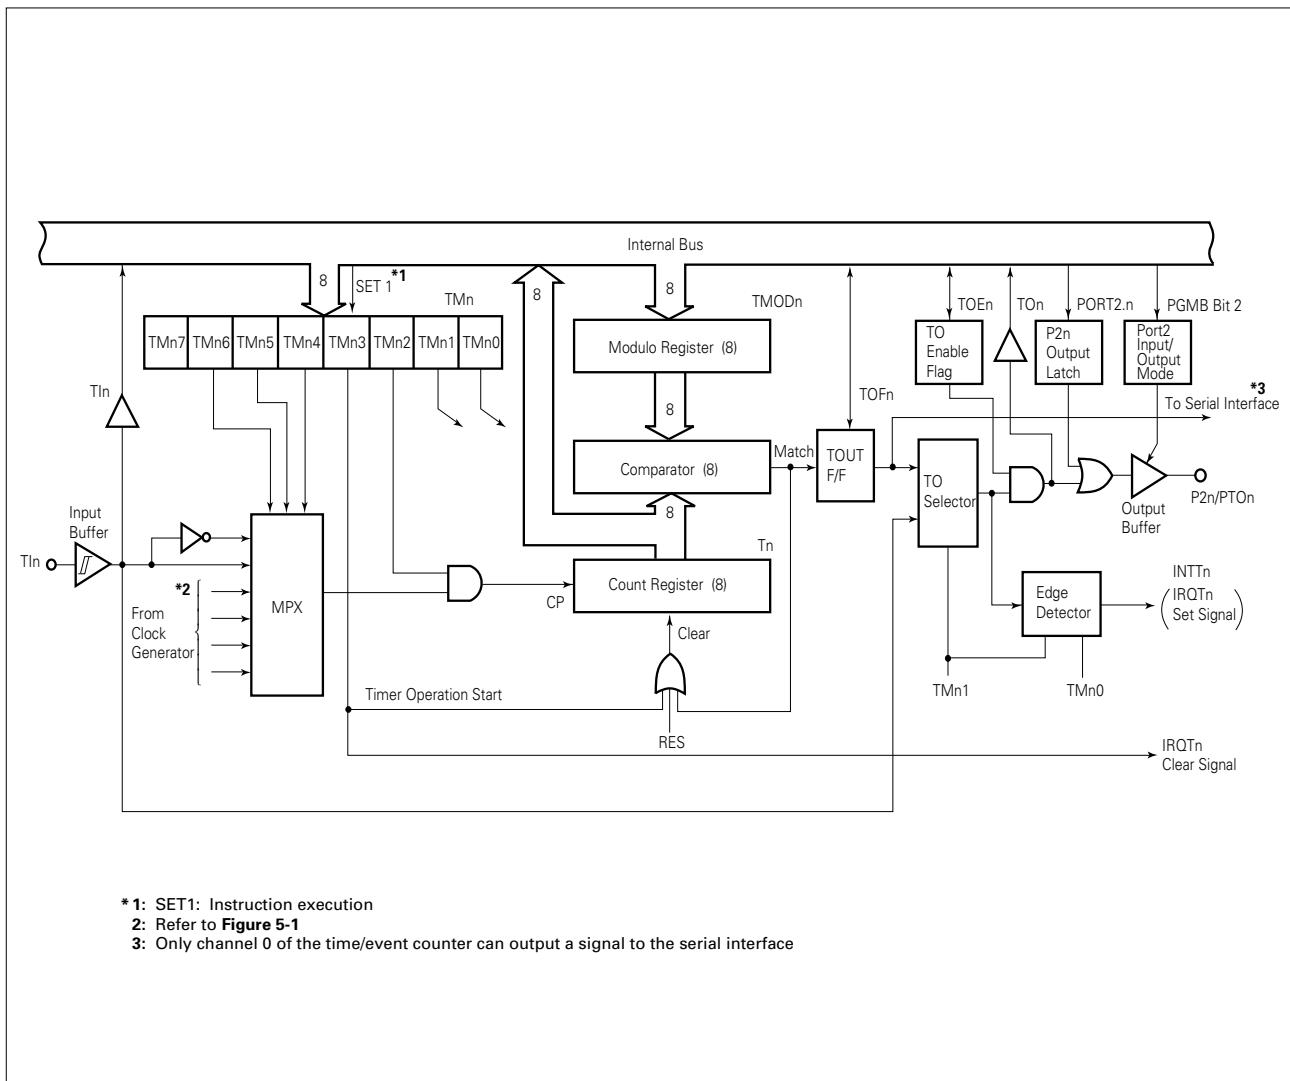


5.6 Serial Interface

The μ PD75116(A) incorporates the clock synchronous 8-bit serial interface. The serial interface has the following two modes.

- Operation stop mode
- 3-wire serial I/O mode (MSB/LSB top switching possible)

Connection with the μ PD75116(A) and the 75X series, 78K series and various I/O devices is possible in the 3-wire serial I/O mode.

Figure 5-5 Block Diagram of Serial Interface

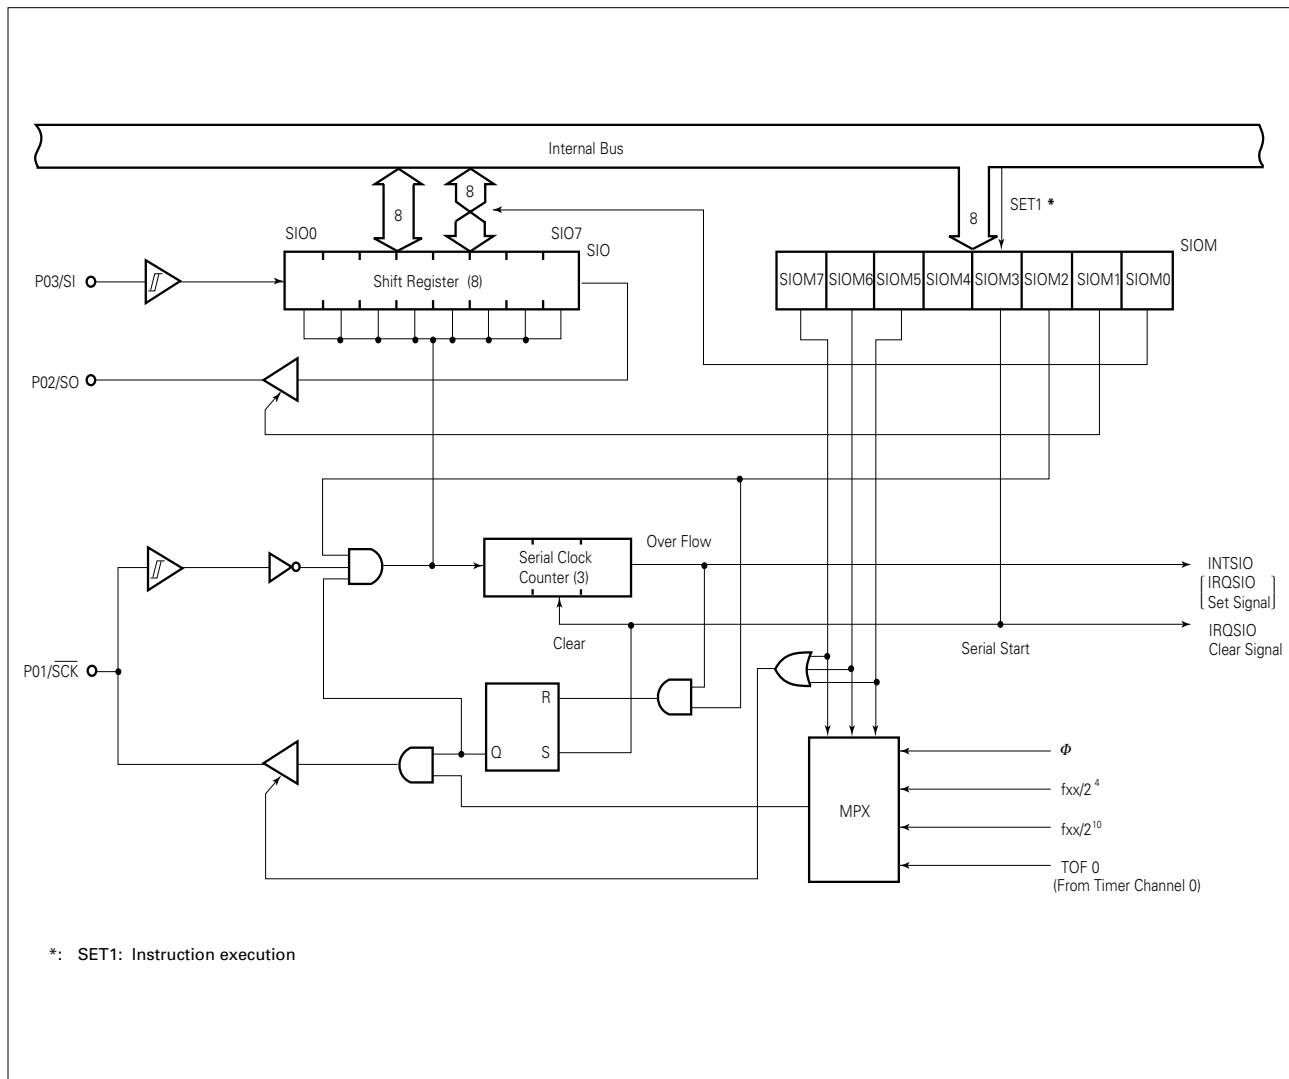


5.7 Programmable Threshold Port (Analog Input Port)

The μ PD75116(A) is equipped with 4-bit analog input pins (PTH00 to PTH03) capable of changing the threshold voltage. These pins are configured as shown in Figure 5-6.

Sixteen threshold voltage (V_{REF}) values ($V_{DD} \times \frac{0.5}{16} - V_{DD} \times \frac{15.5}{16}$) are available and analog signals can be directly input.


The analog input port can also be used as a digital signal input port by selecting $V_{DD} \times \frac{7.5}{16}$ for V_{REF} .

Figure 5-6 Block Diagram of Programmable Threshold Port

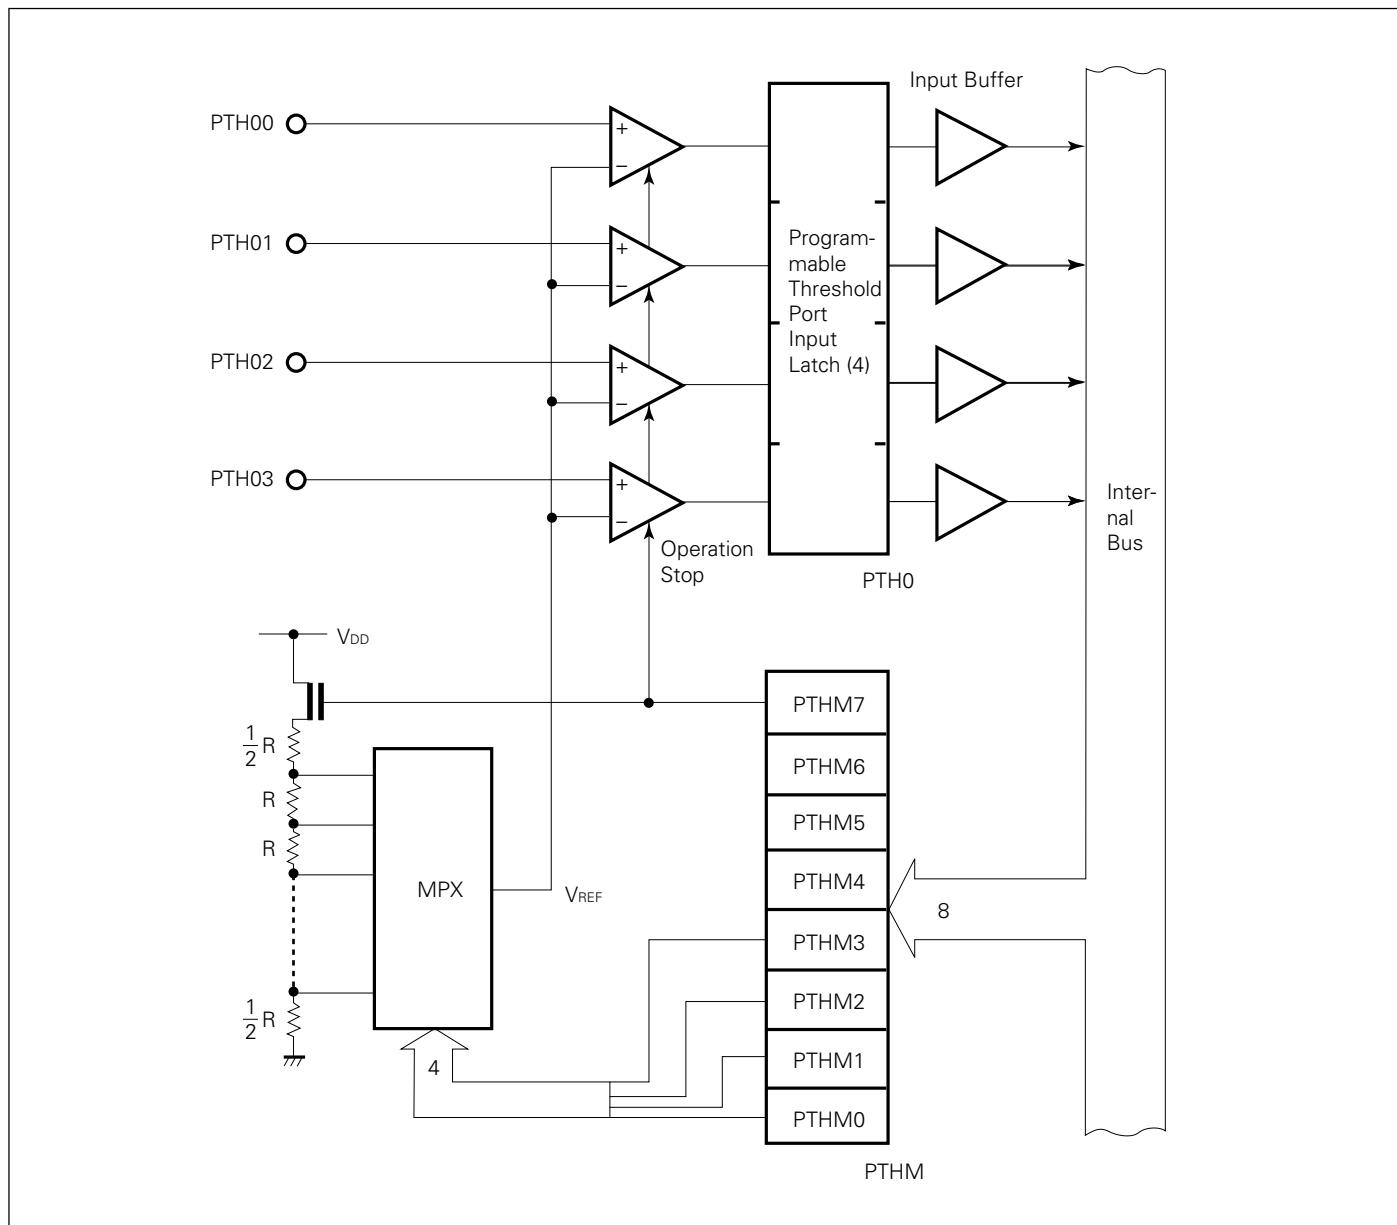

5.8 Bit Sequential Buffer ... 16 bit

The bit sequential buffer is a special data memory for bit control. Since this buffer can easily operate bits by sequentially changing address and bit specifications, it can be conveniently be used for bit-wise processing of data having long bit lengths.

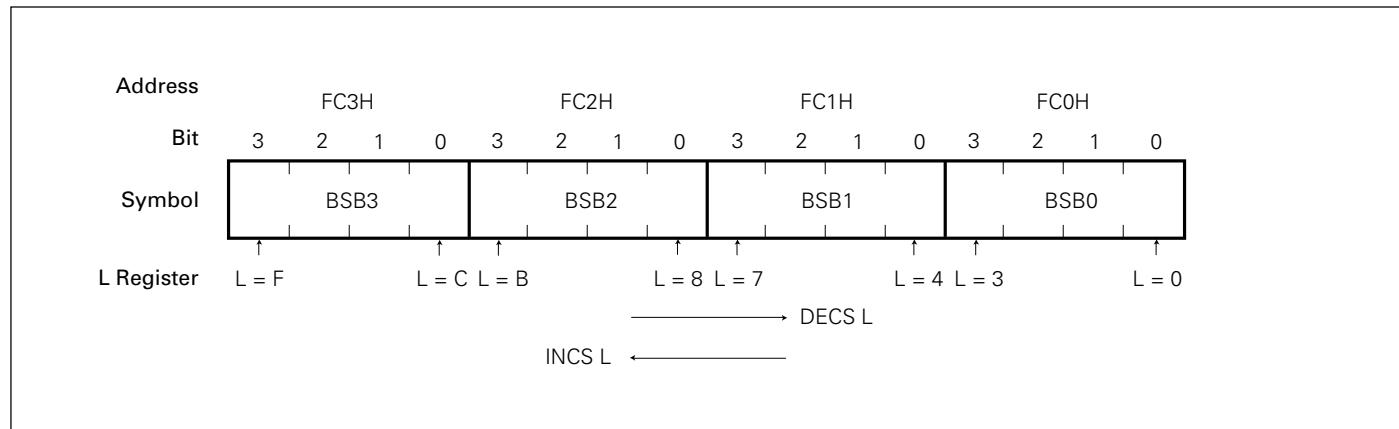Figure 5-7 Bit Sequential Buffer Format

Remarks: In pmen. @L addressing, the specified bit moves in accordance with the L register.

5.9 Power-On Flag (Mask Option)

The power-on flag (PONF) is only set (1) when the power-on reset circuit is activated and the power-on reset signal is generated (see **Figure 8-1**).

PONF is mapped on bit 0 at address FD1H of the data memory space and is manipulated by a bit manipulation instruction

However, it cannot be set(1) by the SET1 instruction.

6. Interrupt Functions


There are seven types of interrupt sources for the μ PD75116(A) to allow multi-interruption with priority.

The μ PD75116(A) is also provided with two types of edge detection testable inputs.

The μ PD75116 interrupt control circuit has the following functions;

- Hardware controlled vector interrupt function which enables to control by the interrupt enable flag (IE_{xxxx}) and the interrupt master enable flag (IME) whether an interrupt should be enabled.
- Interrupt start address can be set freely.
- Multiple interrupt function which enables to specify priority by the interrupt priority select register (IPS).
- Interrupt request flag (IRQ_{xxxx}) test function (interrupt generation can be checked by the software).
- Standby mode release (the interrupt to be released can be selected by the interrupt enable flag).

Figure 6-1 Block Diagram of Interrupt Control Circuit

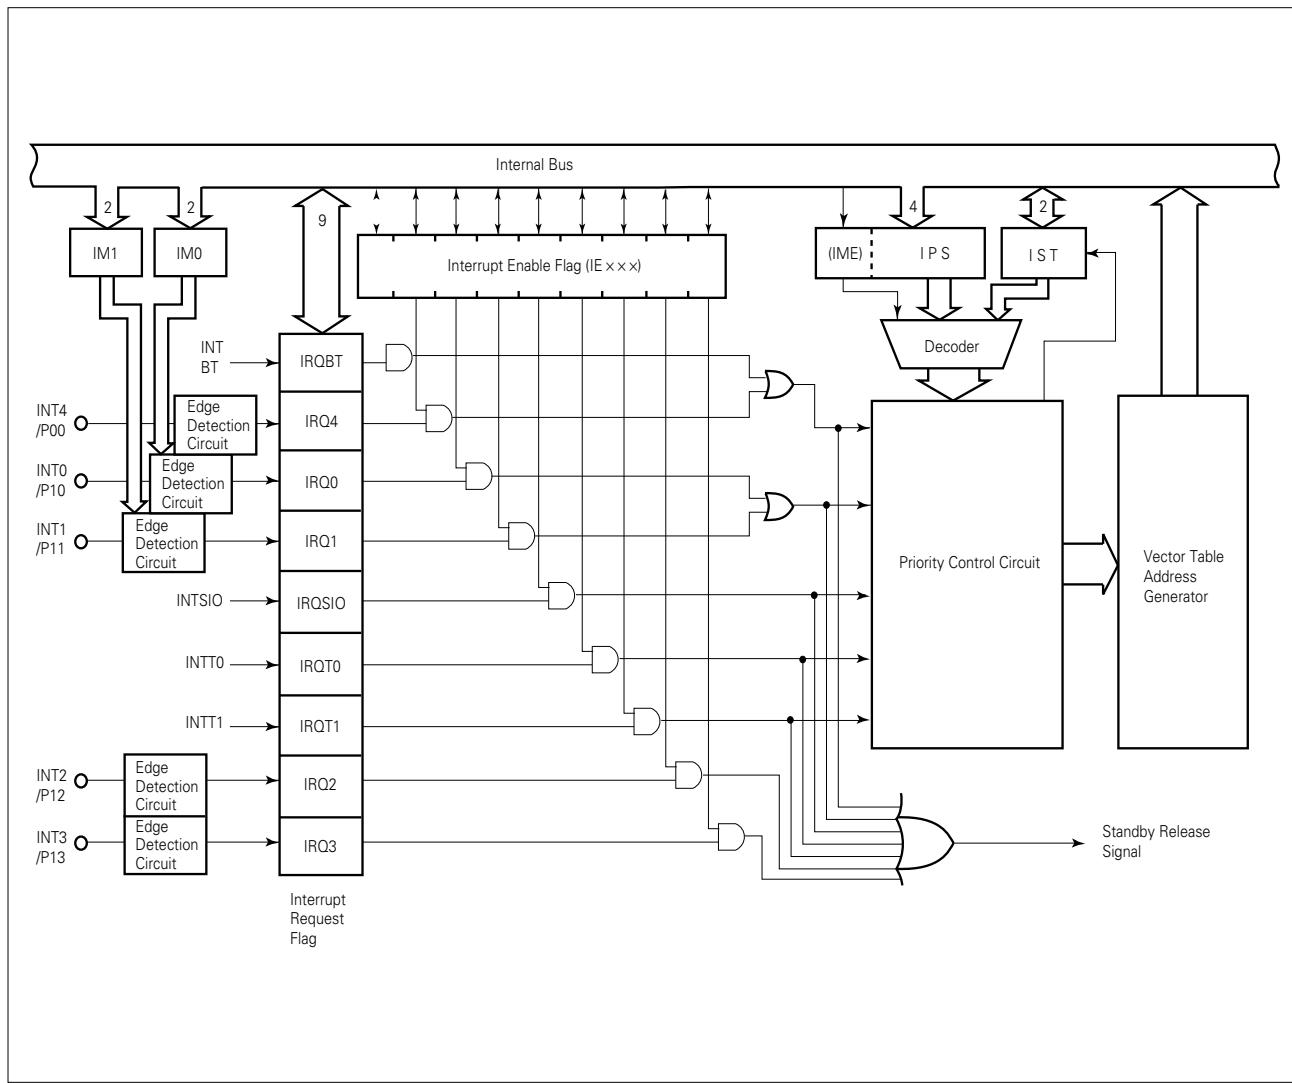

7. Standby Functions

Two types of standby modes (STOP and HALT modes) are available for the μ PD75116(A) to decrease power consumption during standby for program.


Table 7-1 Operation Statuses in Standby Mode

| | | STOP Mode | HALT Mode |
|------------------|----------------------|---|--|
| Set instruction | | STOP instruction | HALT instruction |
| Operation status | Clock generator | Clock oscillation stop | Only CPU clock ϕ stop |
| | Basic interval timer | Operation stop | Operation (IRQBT set at reference time intervals) |
| | Serial interface | Operation enabled only when external \overline{SCK} input and T00 clock are set for serial clocks (when timer/event counter 0 is set to external TI0 input) is selected | Operation enabled when a clock other than ϕ is specified for the serial clock |
| | Timer/event counter | Operation enabled only when TIn pin input is specified for the count clock | Operation enabled |
| | Clock output circuit | Operation stop | Clock other than CPU clock ϕ enabled for output |
| | CPU | Operation stop | Operation stop |
| Release signal | | Interrupt request signal enabled by interrupt enable flag or RESET input | |

8. Reset Functions

The reset signal (RES) generator is configured as shown in Figure 8-1.

Figure 8-1 Reset Signal Generator

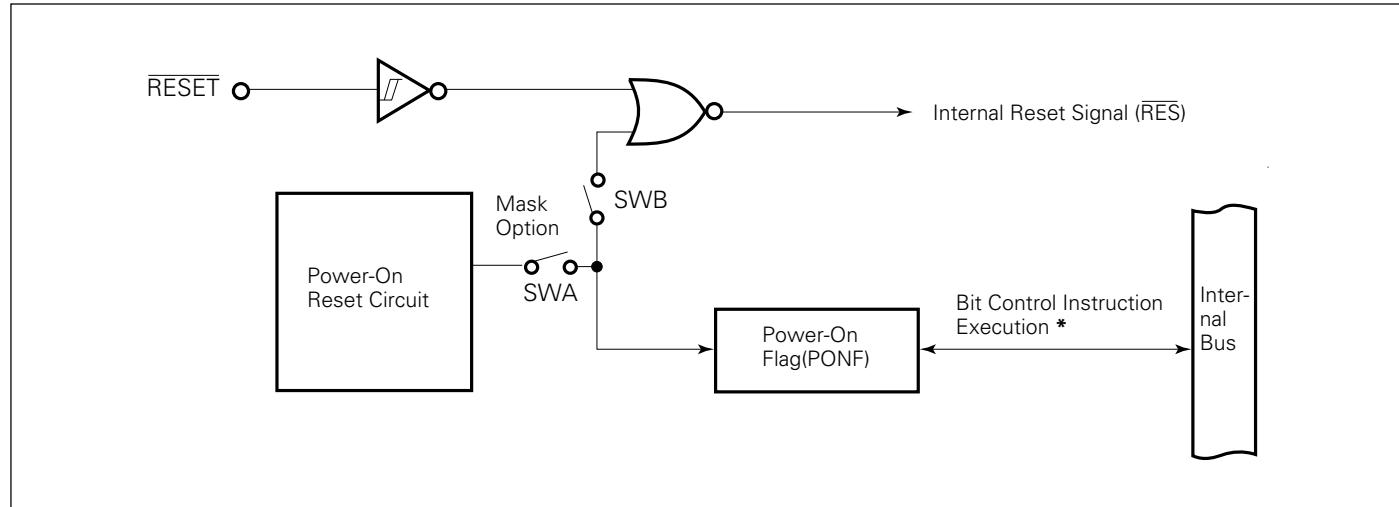

*: PONF setting (1) by SET1 instruction is not possible.

The power-on reset circuit generates the internal reset signal by rising of supply voltage. This pulse is used in the three ways according to the specification of mask option of SWA and SWB shown in Figure 8-1 (refer to "10. Mask Option Selection").

Reset operations are shown in Figures 8-2 and 8-3.

Figure 8-2 Reset Operation by Power-on Reset


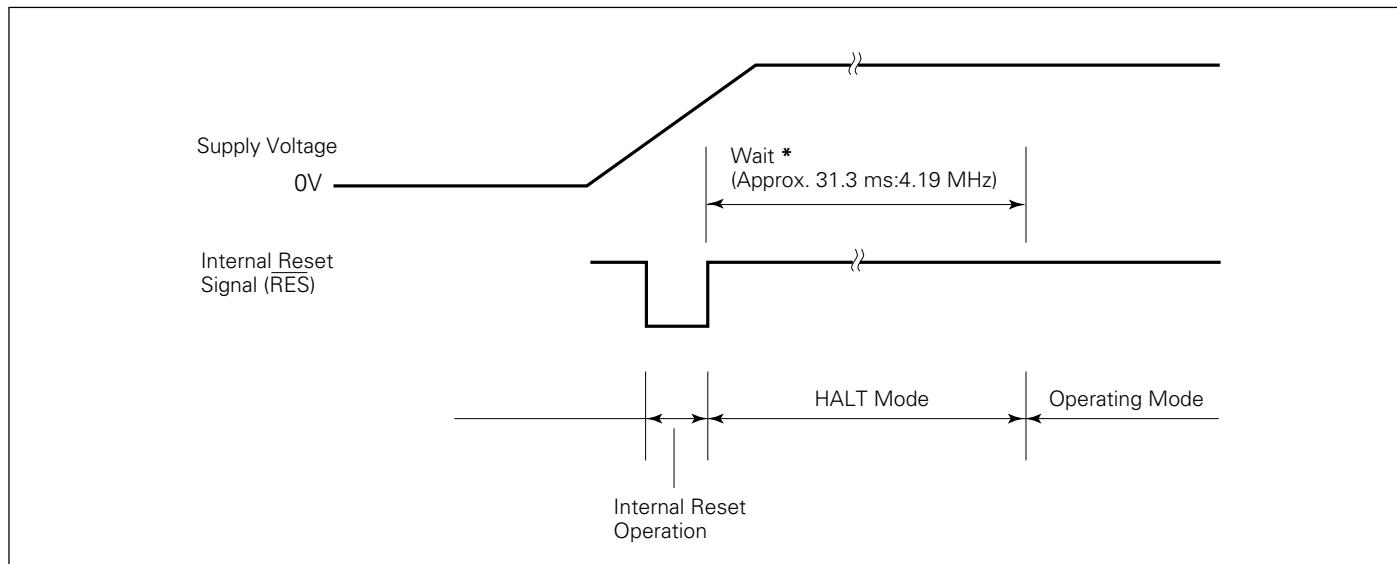


Figure 8-3 Reset Operation by Reset Input

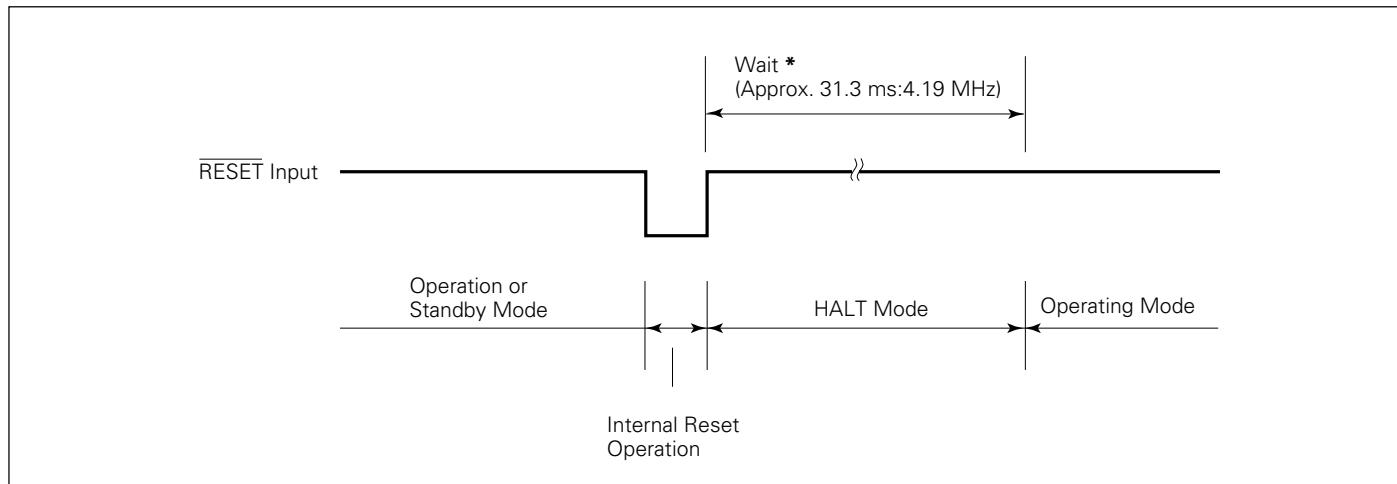

*: The wait time does not include a time from the generation of RES signal to the start of oscillation.

Each hardware status after reset operation is shown in Table 8-1.

Table 8-1 Hardware Statuses after Reset

| Hardware | | <u>RESET</u> Input in Standby Mode | <u>RESET</u> Input in Power-On Reset or Operation |
|--|--|---|---|
| Program counter (PC) | | Lower 6 bits of address 0000H of the program memory are set to PC13 to PC8 and the content of address 0001H is set to PC7 to PC0. | same as left |
| PWS | Carry flag (CY) | Hold | Undefined |
| | Skip flag (SK0 to SK2) | 0 | 0 |
| | Interrupt status flag (IST0, 1) | 0 | 0 |
| | Bank enable flags (MBE, RBE) | Bits 6 and 7 of address 0000H of the program memory are set to RBE and MBE, respectively. | same as left |
| Stack pointer (SP) | | Undefined | Undefined |
| Data memory (RAM) | | Hold *1 | Undefined |
| General registers (X, A, H, L, D, E, B, C) | | Hold | Undefined |
| Bank select registers (MBS, RBS) | | 0, 0 | 0, 0 |
| Basic interval timer | Counter (BT) | Undefined | Undefined |
| | Mode register (BTM) | 0 | 0 |
| Timer/ event counter (n = 0, 1) | Counter (Tn) | 0 | 0 |
| | Modulo register (TMODn) | FFH | FFH |
| | Mode register (TMn) | 0 | 0 |
| | TOEn, TOFn | 0, 0 | 0, 0 |
| Serial interface | Shift register (SIO) | Hold | Undefined |
| | Mode register (SIOM) | 0 | 0 |
| Clock generator, clock output circuit | Processor clock control register (PCC) | 0 | 0 |
| | Clock output mode register (CLOM) | 0 | 0 |
| Interrupt | Interrupt request flag (IROxxx) | Reset (0) | Reset (0) |
| | Interrupt enable flag (IExxx) | 0 | 0 |
| | Priority select register (IPS) | 0 | 0 |
| | INT0, 1 mode registers (IM0, IM1) | 0, 0 | 0, 0 |
| Digital port | Output buffer | Off | Off |
| | Output latch | Clear (0) | Clear (0) |
| | Input/output mode registers (PMGA, PMGB, PMGC) | 0 | 0 |
| Analog port | PTH00 to PTH03 input latches | Undefined | Undefined |
| | Mode register (PTHM) | 0 | 0 |
| Power-on flag (PONF) | | Hold | 1 or undefined *2 |
| Bit sequential buffers (BSB0 to BSB3) | | 0 | 0 |

* 1: Power-on reset 1

RESET input in operation ... Undefined2: Data at addresses 0F8H to 0FDH of the data memory becomes undefined due to RESET input.

9. Instruction Set

(1) Operand identifier and description method

In the operand column of each instruction, describe the corresponding operand in accordance with the description method for the operand identifier of the instruction (refer to the "**RA75X Assembler Package User's Manual Language Volume**" (EEU-730) for details). If more than one description method is available, select one of them. Capital alphabetic letters, plus and minus signs are key words. Describe them as they are.

In the case of immediate data, describe appropriate numeric values or labels.

Symbols of various registers and flags can be described as labels instead of mem, fmem, pmem, bit, etc. (Refer to the " **μ PD751xx Series User's Manual (IEM-922)**" for details). Labels which can be described are limited for fmem and pmem.

| Identifier | Description Method | |
|--|--|---|
| reg reg1 | X, A, B, C, D, E, H, L X, B, C, D, E, H, L | |
| rp rp1 rp2 rp' rp'1 | XA, BC, DE, HL BC, DE, HL BC, DE XA, BC, DE, HL, XA', BC', DE', HL' BC, DE, HL, XA', BC', DE', HL' | |
| rpa rpa1 | HL, HL+, HL-, DE, DL DE, DL | |
| n4 n8 | 4-bit immediate data or label 8-bit immediate data or label | |
| mem bit | 8-bit immediate data or label* 2-bit immediate data or label | |
| fmem pmem | FB0H to FBFH and FF0H to FFFFH immediate data or labels FC0H to FFFFH immediate data or labels | |
| addr | μ PD75112(A) | 0000H to 2F7FH immediate data or labels |
| | μ PD75116(A) | 0000H to 3F7FH immediate data or labels |
| caddr | 12-bit immediate data or label | |
| faddr | 11-bit immediate data or label | |
| taddr | 20H to 7FH immediate data (bit = 0) or labels | |
| PORTn IE _{xxx} RBn MBn | PORT0 to PORT9, PORT12 to PORT14 IETB, IESIO, IET0, IET1, IE0 to IE4 RB0 to RB3 MB0, MB1, MB15 | |


*: In the case of 8-bit data processing, only even address can be described for "mem".

μPD75112(A), 75116(A)

(2) Legend in the description of operations

| | | |
|-------------------|---|---------------------------------------|
| A | : | A register; 4-bit accumulator |
| B | : | B register |
| C | : | C register |
| D | : | D register |
| E | : | E register |
| H | : | H register |
| L | : | L register |
| X | : | X register |
| XA | : | Register pair (XA); 8-bit accumulator |
| BC | : | Register pair (BC) |
| DE | : | Register pair (DE) |
| HL | : | Register pair (HL) |
| XA' | : | Extended register pair (XA') |
| BC' | : | Extended register pair (BC') |
| DE' | : | Extended register pair (DE') |
| HL' | : | Extended register pair (HL') |
| PC | : | Program counter |
| SP | : | Stack pointer |
| CY | : | Carry flag; bit accumulator |
| PSW | : | Program status word |
| MBE | : | Memory bank enable flag |
| RBE | : | Register bank enable flag |
| PORTn | : | Port n (n = 0 to 9, 12 to 14) |
| IME | : | Interrupt mask enable flag |
| IPS | : | Interrupt priority select register |
| IE _{XXX} | : | Interrupt enable flag |
| RBS | : | Register bank select register |
| MBS | : | Memory bank select register |
| PCC | : | Processor clock control register |
| . | : | Address and bit division |
| (XX) | : | Content addressed by XX |
| XXH | : | Hexadecimal data |

(3) Description of symbols in the addressing area column
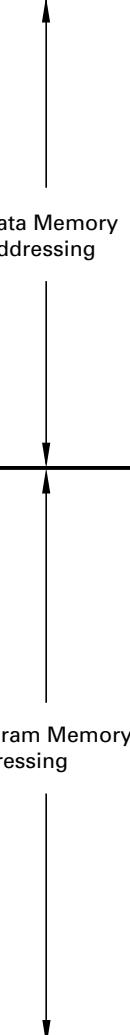
| | | |
|-----|---|--|
| *1 | MB=MBE•MBS (MBS=0, 1, 15) |  |
| *2 | MB=0 | |
| *3 | MBE=0 : MB=0 (00H-7FH) MBE=15 (80H-FFH) MBE=1 : MB=MBS (MBS=0, 1, 15) | |
| *4 | MB=15, fmem=FB0H-FBFH, FF0H=FFFF | |
| *5 | MB=15, pmem=FC0H-FFFH | |
| *6 | addr=0000H-2F7FH (μ PD75112(A)) =0000H-3F7FH (μ PD75116(A)) | |
| *7 | addr=(Current PC) -15 to (Current PC) +16 | |
| *8 | caddr=0000H-0FFFH (PC13, PC12=00B : μ PD75112(A), 116(A)) or =1000H-1FFFH (PC13, PC12=01B : μ PD75112(A), 116(A)) or =2000H-2FFFH (PC13, PC12=10B : μ PD75112(A)) or =2000H-2FFFH (PC13, PC12=10B : μ PD75116(A)) or =3000H-3F7FH (PC13, PC12=11B : μ PD75116(A)) | |
| *9 | faddr=0000H-07FFH | |
| *10 | taddr=0020H-007FH | |

Remarks

- 1: MB indicates an accessible memory bank.
- 2: In *2, MB = 0 irrespectively of MBE and MBS.
- 3: In *4 and *5, MB = 15 irrespectively of MBE and MBS.
- 4: *6 to *10 indicate addressable areas.

One machine cycle is equal to one cycle (=t_{cy}) of CPU clock. Three values are available for the one machine cycle by PCC setting.

(4) Description of machine cycle column

S indicates the number of machine cycles required for the instruction having skip function to execute skip operation. The value of S varies as follows:

- When no skip S = 0
- When 1-byte or 2-byte instruction is skipped S = 1
- When 3-byte instruction (BR !addr, CALL !addr instructions) is skipped S = 2

Note: GETI instruction is skipped in one-machine cycle.

μ PD75112(A), 75116(A)

| Instructions | Mnemonic | Operand | No. of Bytes | Machine Cycle | Operation | Addressing Area | Skip Condition |
|------------------------|----------|-----------------|--------------|---------------|---|-----------------|----------------|
| Transfer | MOV | A, #n4 | 1 | 1 | A \leftarrow n4 | | Stack A |
| | | reg1, #n4 | 2 | 2 | reg1 \leftarrow n4 | | |
| | | XA, #n8 | 2 | 2 | XA \leftarrow n8 | | Stack A |
| | | HL, #n8 | 2 | 2 | HL \leftarrow n8 | | Stack B |
| | | rp2, #n8 | 2 | 2 | rp2 \leftarrow n8 | | |
| | | A, @HL | 1 | 1 | A \leftarrow (HL) | *1 | |
| | | A, @HL+ | 1 | 2+S | A \leftarrow (HL), then L \leftarrow L+1 | *1 | L=0 |
| | | A, @HL- | 1 | 2+S | A \leftarrow (HL), then L \leftarrow L-1 | *1 | L=FH |
| | | A, @rpa1 | 1 | 1 | A \leftarrow (rpa1) | *2 | |
| | | XA, @HL | 2 | 2 | XA \leftarrow (HL) | *1 | |
| | | @HL, A | 1 | 1 | (HL) \leftarrow A | *1 | |
| | | @HL, XA | 2 | 2 | (HL) \leftarrow XA | *1 | |
| | | A, mem | 2 | 2 | A \leftarrow (mem) | *3 | |
| | | XA, mem | 2 | 2 | XA \leftarrow (mem) | *3 | |
| | | mem, A | 2 | 2 | (mem) \leftarrow A | *3 | |
| | | mem, XA | 2 | 2 | (mem) \leftarrow XA | *3 | |
| | | A, reg | 2 | 2 | A \leftarrow reg | | |
| | | XA, rp' | 2 | 2 | XA \leftarrow rp' | | |
| | | reg1, A | 2 | 2 | reg1 \leftarrow A | | |
| | | rp'1 XA | 2 | 2 | rp'1 \leftarrow XA | | |
| | XCH | A, @HL | 1 | 1 | A \leftrightarrow (HL) | *1 | |
| | | A, @HL+ | 1 | 2+S | A \leftrightarrow (HL), then L \leftarrow L+1 | *1 | L=0 |
| | | A, @HL- | 1 | 2+S | A \leftrightarrow (HL), then L \leftarrow L-1 | *1 | L=FH |
| | | A, @rpa1 | 1 | 1 | A \leftrightarrow (rpa1) | *2 | |
| | | XA, @HL | 2 | 2 | XA \leftrightarrow (HL) | *1 | |
| | | A, mem | 2 | 2 | A \leftrightarrow (mem) | *3 | |
| | | XA, mem | 2 | 2 | XA \leftrightarrow (mem) | *3 | |
| | | A, reg1 | 1 | 1 | A \leftrightarrow reg1 | | |
| | | XA, rp' | 2 | 2 | XA \leftrightarrow rp' | | |
| Table Reference | MOVT | XA, @PCDE | 1 | 3 | XA \leftarrow (PC ₁₃₋₈ +DE) _{ROM} | | |
| | | XA, @PCXA | 1 | 3 | XA \leftarrow (PC ₁₃₋₈ +XA) _{ROM} | | |
| Bit Transfer | MOV1 | CY, fmem. bit | 2 | 2 | CY \leftarrow (fmem.bit) | *4 | |
| | | CY, pmem. @L | 2 | 2 | CY \leftarrow (pmem ₇₋₂ +L ₃₋₂ .bit(L ₁₋₀)) | *5 | |
| | | CY, @H+mem. bit | 2 | 2 | CY \leftarrow (H+mem ₃₋₀ .bit) | *1 | |
| | | fmem. bit, CY | 2 | 2 | (fmem.bit) \leftarrow CY | *4 | |
| | | pmem. @L, CY | 2 | 2 | (pmem ₇₋₂ +L ₃₋₂ .bit(L ₁₋₀)) \leftarrow CY | *5 | |
| | | @H+mem. bit, CY | 2 | 2 | (H+mem ₃₋₀ .bit) \leftarrow CY | *1 | |

| Instructions | Mnemonic | Operand | No. of Bytes | Machine Cycle | Operation | Addressing Area | Skip Condition |
|------------------------------|----------|----------|--------------|---------------|--|-----------------|----------------|
| Arithmetic | ADDS | A, #n4 | 1 | 1+S | A \leftarrow A+n4 | | Carry |
| | | XA, #n8 | 2 | 2+S | XA \leftarrow XA+n8 | | Carry |
| | | A, @HL | 1 | 1+S | A \leftarrow A+(HL) | *1 | Carry |
| | | XA, rp' | 2 | 2+S | XA \leftarrow XA+rp' | | Carry |
| | | rp'1, XA | 2 | 2+S | rp'1 \leftarrow rp'1+XA | | Carry |
| | ADDC | A, @HL | 1 | 1 | A, CY \leftarrow A+(HL)+CY | *1 | |
| | | XA, rp' | 2 | 2 | XA, CY \leftarrow XA+rp'+CY | | |
| | | rp'1, XA | 2 | 2 | rp'1, CY \leftarrow rp'1+XA+CY | | |
| | SUBS | A, @HL | 1 | 1+S | A \leftarrow A-(HL) | *1 | borrow |
| | | XA, rp' | 2 | 2+S | XA \leftarrow XA-rp' | | borrow |
| | | rp'1, XA | 2 | 2+S | rp'1 \leftarrow rp'1-XA | | borrow |
| | SUBC | A, @HL | 1 | 1 | A, CY \leftarrow A-(HL)-CY | *1 | |
| | | XA, rp' | 2 | 2 | XA, CY \leftarrow XA-rp'-CY | | |
| | | rp'1, XA | 2 | 2 | rp'1, CY \leftarrow rp'1-XA-CY | | |
| | AND | A, #n4 | 2 | 2 | A \leftarrow A \wedge n4 | | |
| | | A, @HL | 1 | 1 | A \leftarrow A \wedge (HL) | *1 | |
| | | XA, rp' | 2 | 2 | XA \leftarrow XA \wedge rp' | | |
| | | rp'1, XA | 2 | 2 | rp'1 \leftarrow rp'1 \wedge XA | | |
| | OR | A, #n4 | 2 | 2 | A \leftarrow A \vee n4 | | |
| | | A, @HL | 1 | 1 | A \leftarrow A \vee (HL) | *1 | |
| | | XA, rp' | 2 | 2 | XA \leftarrow XA \vee rp' | | |
| | | rp'1, XA | 2 | 2 | rp'1 \leftarrow rp'1 \vee XA | | |
| | XOR | A, #n4 | 2 | 2 | A \leftarrow A \oplus n4 | | |
| | | A, @HL | 1 | 1 | A \leftarrow A \oplus (HL) | *1 | |
| | | XA, rp' | 2 | 2 | XA \leftarrow XA \oplus rp' | | |
| | | rp'1, XA | 2 | 2 | rp'1 \leftarrow rp'1 \oplus XA | | |
| Accumulator Operation | RORC | A | 1 | 1 | CY \leftarrow A0, A3 \leftarrow CY, An-1 \leftarrow An | | |
| | NOT | A | 2 | 2 | A \leftarrow \bar{A} | | |
| Increase/Decrease | INCS | reg | 1 | 1+S | reg \leftarrow reg+1 | | reg=0 |
| | | rp1 | 1 | 1+S | rp1 \leftarrow rp1+1 | | rp1=00H |
| | | @HL | 2 | 2+S | (HL) \leftarrow (HL)+1 | *1 | (HL)=0 |
| | | mem | 2 | 2+S | (mem) \leftarrow (mem)+1 | *3 | (mem)=0 |
| | DECS | reg | 1 | 1+S | reg \leftarrow reg-1 | | reg=FH |
| | | rp' | 2 | 2+S | rp' \leftarrow rp'-1 | | rp'=FFH |
| Compare | SKE | reg, #n4 | 2 | 2+S | Skip if reg=n4 | | reg=n4 |
| | | @HL, #n4 | 2 | 2+S | Skip if (HL)=n4 | *1 | (HL)=n4 |
| | | A, @HL | 1 | 1+S | Skip if A=(HL) | *1 | A=(HL) |

μ PD75112(A), 75116(A)

| Instructions | Mnemonic | Operand | No. of Bytes | Machine Cycle | Operation | Addressing Area | Skip Condition |
|-----------------------------|----------|---------|--------------|---------------|-----------------|-----------------|----------------|
| Compare | SKE | XA, @HL | 2 | 2+S | Skip if XA=(HL) | *1 | XA=(HL) |
| | | A, reg | 2 | 2+S | Skip if A=reg | | A=reg |
| | | XA, rp' | 2 | 2+S | Skip if XA=rp' | | XA=rp' |
| Carry Flag Operation | SET1 | CY | 1 | 1 | CY←1 | | |
| | CLR1 | CY | 1 | 1 | CY←0 | | |
| | SKT | CY | 1 | 1+S | Skip if CY=1 | | CY=1 |
| | NOT1 | CY | 1 | 1 | CY←CY — | | |

| Instructions | Mnemonic | Operand | No. of Bytes | Machine Cycle | Operation | Addressing Area | Skip Condition |
|--------------------------------|----------|-----------------|--------------|---------------|---|-----------------|----------------|
| Memory Bit Manipulation | SET1 | mem. bit | 2 | 2 | (mem.bit)←1 | *3 | |
| | | fmem. bit | 2 | 2 | (fmem.bit)←1 | *4 | |
| | | pmem. @L | 2 | 2 | (pmem ₇₋₂ +L ₃₋₂ .bit(L ₁₋₀))←1 | *5 | |
| | | @H+mem. bit | 2 | 2 | (H+mem ₃₋₀ .bit)←1 | *1 | |
| | CLR1 | mem. bit | 2 | 2 | (mem.bit)←0 | *3 | |
| | | fmem. bit | 2 | 2 | (fmem.bit)←0 | *4 | |
| | | pmem. @L | 2 | 2 | (pmem ₇₋₂ +L ₃₋₂ .bit(L ₁₋₀))←0 | *5 | |
| | | @H+mem. bit | 2 | 2 | (H+mem ₃₋₀ .bit)←0 | *1 | |
| | SKT | mem. bit | 2 | 2+S | Skip if (mem.bit)=1 | *3 | (mem.bit)=1 |
| | | fmem. bit | 2 | 2+S | Skip if (fmem.bit)=1 | *4 | (fmem.bit)=1 |
| | | pmem. @L | 2 | 2+S | Skip if (pmem ₇₋₂ +L ₃₋₂ .bit(L ₁₋₀))=1 | *5 | (pmem.@L)=1 |
| | | @H+mem. bit | 2 | 2+S | Skip if (H+mem ₃₋₀ .bit)=1 | *1 | (@H+mem.bit)=1 |
| | SKF | mem. bit | 2 | 2+S | Skip if (mem.bit)=0 | *3 | (mem.bit)=0 |
| | | fmem. bit | 2 | 2+S | Skip if (fmem.bit)=0 | *4 | (fmem.bit)=0 |
| | | pmem. @L | 2 | 2+S | Skip if (pmem ₇₋₂ +L ₃₋₂ .bit(L ₁₋₀))=0 | *5 | (pmem.@L)=0 |
| | | @H+mem. bit | 2 | 2+S | Skip if (H+mem ₃₋₀ .bit)=0 | *1 | (@H+mem.bit)=0 |
| | SKTCLR | fmem. bit | 2 | 2+S | Skip if (fmem.bit)=1 and clear | *4 | (fmem.bit)=1 |
| | | pmem. @L | 2 | 2+S | Skip if (pmem ₇₋₂ +L ₃₋₂ .bit(L ₁₋₀))=1 and clear | *5 | (pmem.@L)=1 |
| | | @H+mem. bit | 2 | 2+S | Skip if (H+mem ₃₋₀ .bit)=1 and clear | *1 | (@H+mem.bit)=1 |
| | AND1 | CY, fmem. bit | 2 | 2 | CY ← CY ∧ (fmem.bit) | *4 | |
| | | CY, pmem. @L | 2 | 2 | CY ← CY ∧ (pmem ₇₋₂ +L ₃₋₂ .bit(L ₁₋₀)) | *5 | |
| | | CY, @H+mem. bit | 2 | 2 | CY ← CY ∧ (H+mem ₃₋₀ .bit) | *1 | |
| | OR1 | CY, fmem. bit | 2 | 2 | CY ← CY ∨ (fmem.bit) | *4 | |
| | | CY, pmem. @L | 2 | 2 | CY ← CY ∨ (pmem ₇₋₂ +L ₃₋₂ .bit(L ₁₋₀)) | *5 | |
| | | CY, @H+mem. bit | 2 | 2 | CY ← CY ∨ (H+mem ₃₋₀ .bit) | *1 | |
| | XOR1 | CY, fmem. bit | 2 | 2 | CY ← CY ∘ (fmem.bit) | *4 | |
| | | CY, pmem. @L | 2 | 2 | CY ← CY ∘ (pmem ₇₋₂ +L ₃₋₂ .bit(L ₁₋₀)) | *5 | |
| | | CY, @H+mem. bit | 2 | 2 | CY ← CY ∘ (H+mem ₃₋₀ .bit) | *1 | |
| Branch | BR | addr | — | — | PC ₁₃₋₀ ← addr (Most appropriate instruction is selected by assembler from among BR !addr, BRCB !caddr and BR \$addr) | *6 | |
| | | !addr | 3 | 3 | PC ₁₃₋₀ ← addr | *6 | |
| | | \$addr | 1 | 2 | PC ₁₃₋₀ ← addr | *7 | |
| | BRCB | !caddr | 2 | 2 | PC ₁₃₋₀ ← PC _{13, 12+caddr11-0} | *8 | |
| | BR | PCDE | 2 | 3 | PC ₁₃₋₀ ← PC _{13-8+DE} | | |
| | | PCXA | 2 | 3 | PC ₁₃₋₀ ← PC _{13-8+XA} | | |

μ PD75112(A), 75116(A)

| Instructions | Mnemonic | Operand | No. of Bytes | Machine Cycle | Operation | Addressing Area | Skip Condition |
|---------------------------------|----------|-----------|--------------|---------------|--|-----------------|---|
| Subroutine Stack Control | CALL | !addr | 3 | 3 | (SP-4)(SP-1)(SP-2)←PC ₁₁₋₀ (SP-3)←MBE, RBE, PC _{13, 12} PC ₁₃₋₀ ←addr, SP←SP-4 | *6 | |
| | CALLF | !faddr | 2 | 2 | (SP-4)(SP-1)(SP-2)←PC ₁₁₋₀ (SP-3)←MBE, RBE, PC _{13, 12} PC ₁₃₋₀ ←00, faddr, SP←SP-4 | *9 | |
| | RET | | 1 | 3 | MBE, RBE, PC _{13, 12} ←(SP+1) PC ₁₁₋₀ ←(SP)(SP+3)(SP+2) SP←SP+4 | | |
| | RETS | | 1 | 3+S | MBE, RBE, PC _{13, 12} ←(SP+1) PC ₁₁₋₀ ←(SP)(SP+3)(SP+2) SP←SP+4, then skip unconditionally | | Unconditional |
| | RETI | | 1 | 3 | PC _{13, 12} ←(SP+1) PC ₁₁₋₀ ←(SP)(SP+3)(SP+2) PSW←(SP+4)(SP+5), SP←SP+6 | | |
| | PUSH | rp | 1 | 1 | (SP-1)(SP-2)←rp, SP←SP-2 | | |
| | | BS | 2 | 2 | (SP-1)←MBS, (SP-2)←RBS, SP←SP-2 | | |
| | POP | rp | 1 | 1 | rp←(SP-1)(SP), SP←SP-2 | | |
| | | BS | 2 | 2 | MBS←(SP+1), RBS←(SP), SP←SP+2 | | |
| Interrupt Control | EI | | 2 | 2 | IME (IPS.3)←1 | | |
| | | IExxxx | 2 | 2 | IExxxx←1 | | |
| | DI | | 2 | 2 | IME (IPS.3)←0 | | |
| | | IExxxx | 2 | 2 | IExxxx←0 | | |
| Input/Output | IN*1 | A, PORTn | 2 | 2 | A←PORTn (n=0-9, 12-14) | | |
| | | XA, PORTn | 2 | 2 | XA←PORTn+1, PORTn (n=4, 6, 8, 12) | | |
| | OUT*1 | PORTn, A | 2 | 2 | PORTn←4 (n=2-9, 12-14) | | |
| | | PORTn, XA | 2 | 2 | PORTn+1, PORTn←XA (n=4, 6, 8, 12) | | |
| CPU Control | HALT | | 2 | 2 | Set HALT Mode (PCC.2←1) | | |
| | STOP | | 2 | 2 | Set STOP Mode (PCC.3←1) | | |
| | NOP | | 1 | 1 | No Operation | | |
| Special | SEL | RBn | 2 | 2 | RBS←n(n=0-3) | | |
| | | MBn | 2 | 2 | MBS←n (n=0, 1, 15) | | |
| | GETI*2 | taddr | 1 | 3 | • TBR Instruction PC ₁₃₋₀ ←(taddr)4-0+(taddr+1) | *10 | Depends on the instruction referred to. |
| | | | | | • TCALL Instruction (SP-4)(SP-1)(SP-2)←PC ₁₁₋₀ (SP-3)←MBE, RBE, PC _{13, 12} PC ₁₃₋₀ ←(taddr)5-0+(taddr+1) SP←SP-4 | | |
| | | | | | • When not TBR and TCALL instructions, (taddr) and (taddr+1) instructions are executed. | | |

* 1: MBE=0 or 1 and MBS=15 must be set for execution of IN/OUT instruction.

2: TBR and TCALL instructions are assembler pseudo-instructions for GETI instruction table definition.

10. Mask Option Selection

The following mask options are available for the ★
 μ PD75116(A).

Whether or not they should be incorporated can be selected.

(1) Pins

| Pin | Mask Option |
|--------------|--|
| P120 to P123 | Bit-wise pull-up resistor incorporation enable |
| P130 to P133 | |
| P140 to P143 | |

(2) Power-on reset circuit and power-on flag (PONF)

One of the following three settings can be selected.

| Mask Option Specification | | Switch Selection (See Figure 8-1) | | Internal Reset Signal (RES) |
|---------------------------|-------------------------|--|-----|--------------------------------|
| Power-on Reset Circuit | Power-on Flag (PONF) | SWA | SWB | |
| Incorporated | Incorporated | ON | ON | Generated automatically |
| Not incorporated | Incorporated | ON | OFF | Not generated automatically |
| Not incorporated | Not incorporated | OFF | OFF | — |

11. Electrical Specifications

Absolute Maximum Ratings

(Ta = 25 °C)

| Parameter | Symbol | Test Conditions | | Ratings | Unit |
|-----------------------|--------|--|--------------------------|------------------|------|
| Power supply voltage | VDD | | | -0.3 to +7.0 | V |
| Input voltage | VI1 | Except for ports 12 to 14 | | -0.3 to VDD +0.3 | V |
| | VI2 *1 | Ports 12 to 14 | On-chip pull-up resistor | -0.3 to VDD +0.3 | V |
| | | | Open drain | -0.3 to +13 | V |
| Output voltage | VO | | | -0.3 to VDD +0.3 | V |
| Output current high | IOH | 1 pin | Peak value | -10 | mA |
| | | | Effective value | -5 | mA |
| | | All pins | Peak value | -30 | mA |
| | | | Effective value | -15 | mA |
| Output current low | IOL *2 | 1 pin | Peak value | 10 | mA |
| | | | Effective value | 5 | mA |
| | | Total current of ports 0, 2 to 4, 12 to 14 | Peak value | 50 | mA |
| | | | Effective value | 25 | mA |
| | | | Peak value | 50 | mA |
| | | | Effective value | 25 | mA |
| Operation temperature | TOPT | | | -40 to +85 | °C |
| Storage temperature | TSTG | | | -65 to +150 | °C |

* 1: When applying a voltage larger than 10 V to ports 12, 13 and 14 each, set the power impedance (pull-up resistor) to 50 kΩ or more.

2: Calculate each effective value using the following expression:

$$[\text{Effective value}] = [\text{Peak value}] \times \sqrt{\text{duty}}$$

Note: Product quality may suffer if the absolute maximum rating is exceeded for even a single parameter or even momentarily. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions which ensure that the absolute maximum ratings are not exceeded.

Operating Voltage ★

(Ta = -40 to +85 °C)

| Parameter | Test Conditions | MIN. | MAX. | Unit |
|---|-----------------|------|------|------|
| CPU*1 | | *2 | 6.0 | V |
| Programmable threshold port (comparator input) | | 4.5 | 6.0 | V |
| Power-on reset circuit*3 | | 4.5 | 6.0 | V |
| Other hardware*1 | | 2.7 | 6.0 | V |

*1: Except system clock oscillator, programmable threshold port and power-on reset circuit




2: Operating voltage range depends on the cycle time.

See the **AC Characteristics**.

3: Whether or not it should be incorporated can be selected by mask options.

See the **Power-On Reset Circuit Characteristics (Mask Option)**.

μ PD75112(A), 75116(A)**Oscillate Characteristics**(Ta = -40 to +85 °C, V_{DD} = 2.7 to 6.0 V)
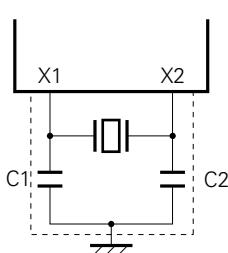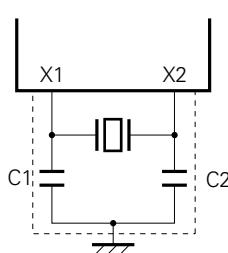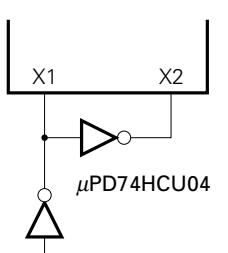
| Oscillator | Recommended Constant | Parameter | Test Condition | MIN. | TYP. | MAX. | Unit |
|---------------------|---|---|---|------|------|-------|------|
| Ceramic oscillation |  | Oscillator frequency (f _{xx})*1 | V _{DD} = oscillation voltage range | 2.0 | | 5.0*3 | MHz |
| | | Oscillation stabilizing time*2 | Oscillation voltage range MIN. | 4 | | | ms |
| Crystal oscillator |  | Oscillator frequency (f _{xx})*1 | | 2.0 | 4.19 | 5.0*3 | MHz |
| | | Oscillation stabilizing time*2 | V _{DD} = 4.5 to 6.0 V | 10 | | | ms |
| | | | | 30 | | | ms |
| External clock |  | X1 input frequency (f _x)*1 | | 2.0 | | 5.0*3 | MHz |
| | | X1 input high and low level widths (t _{xH} , t _{XL}) | | 100 | | 250 | ns |

*1: Oscillator frequency and X1 input frequency indicate only characteristics of the oscillator. Refer to AC characteristics for the instruction execution time.

2: The oscillation stabilizing time is necessary for oscillation to stabilize after V_{DD} reaches oscillation voltage range MIN. or the STOP mode is released.

3: When the oscillator frequency is 4.19 MHz < f_{xx} ≤ 5.0 MHz, PCC=0011 should not be selected as instruction execution time. If PCC=0011 is selected, 1 machine cycle becomes less than 0.95 μ s, with the result that the specified MIN. value of 0.95 μ s cannot be observed.

Note: When using the main system clock oscillator, wiring in the area enclosed with the dotted line should be carried out as follows to avoid an adverse effect from wiring capacitance. ★

- Wiring should be as short as possible.
- Wiring should not cross other signal lines.
- Wiring should not be placed close to a varying high current.
- The potential of the oscillator capacitor ground should be the same as V_{SS}. Do not ground wiring to a ground pattern in which a high current flows.
- Do not fetch a signal from the oscillator.

DC Characteristics(Ta = -40 to +85 °C, V_{DD} = 2.7 to 6.0 V)

| Parameter | Symbol | Test Conditions | | MIN. | TYP. | MAX. | Unit |
|-----------------------------|-------------------|---|---|---------------------------|------|--------------------|------------|
| Input voltage high | V _{IH1} | Except for ports listed below | | 0.7V _{DD} | | V _{DD} | V |
| | V _{IH2} | Ports 0, 1, T10, 1, <u>RESET</u> | | 0.8V _{DD} | | V _{DD} | V |
| | V _{IH3} | Ports 12 to 14 | On-chip pull-upresistor | 0.7V _{DD} | | V _{DD} | V |
| | | | Open drain | 0.7V _{DD} | | 12 | V |
| | V _{IH4} | X1, X2 | | V _{DD} -0.5 | | V _{DD} | V |
| Input vltage low | V _{IL1} | Except for ports listed below | | 0 | | 0.3V _{DD} | V |
| | V _{IL2} | Ports 0, 1, T10, 1, <u>RESET</u> | | 0 | | 0.2V _{DD} | V |
| | V _{IL3} | X1, X2 | | 0 | | 0.4 | V |
| Output voltage high | V _{OH} | V _{DD} = 4.5 to 6.0 V, I _{OH} = -1 mA | | V _{DD} -1.0 | | | V |
| | | I _{OH} = -100 μ A | | V _{DD} -0.5 | | | V |
| Output voltage low | V _{OL} | V _{DD} = 4.5 to 6.0 V | Ports 0, 2 to 9, I _{OL} = 5 mA | | 0.25 | 1.0 | V |
| | | | Ports 12 to 14, I _{OL} = 5 mA | | 0.40 | 1.0 | V |
| | | V _{DD} = 4.5 to 6.0V, I _{OL} = 1.6 mA | | | | 0.4 | V |
| | | I _{OL} = 400 μ A | | | | 0.5 | V |
| Input leakage current high | I _{LIH1} | V _{IN} = V _{DD} | Except for ports listed below | | | 3 | μ A |
| | I _{LIH2} | | X1, X2 | | | 20 | μ A |
| | I _{LIH3} | V _{IN} = 12 V | Ports 12 to 14 (for open drain) | | | 20 | μ A |
| Input leakage current low | I _{LIL1} | V _{IN} = 0 V | Except for X1, X2 | | | -3 | μ A |
| | I _{LIL2} | | X1, X2 | | | -20 | μ A |
| Output leakage current high | I _{LOH1} | V _{OUT} = V _{DD} | Except for ports listed below | | | 3 | μ A |
| | I _{LOH2} | V _{OUT} = 12 V | Ports 12 to 14 (for open drain) | | | 20 | μ A |
| Output leakage current low | I _{LOL} | V _{OUT} = 0 V | | | | -3 | μ A |
| On-chip pull-up resistor | R _L | Ports 12 to 14 | V _{DD} =5 V ±10% | | 15 | 40 | k Ω |
| | | | 10 | | | 80 | k Ω |
| Supply current*1 | I _{DD1} | 4.19 MHz crystal oscillation C1 = C2 = 22 pF | V _{DD} =5 V ±10%*2 | | | 3 | mA |
| | | | V _{DD} =3 V ±10%*3 | | | 0.55 | mA |
| | | | HALT mode | V _{DD} =5 V ±10% | | 600 | 1800 |
| | | | | V _{DD} =3 V ±10% | | 200 | μ A |
| | I _{DD3} | STOP mode, V _{DD} = 3 V ±10% | | | 0.1 | 10 | μ A |

* 1: Current for the on-chip pull-up resistor, power-on reset circuit (mask option) and comparator circuit is not included.
 2: When operated in the hgh-speed mode with the processor clock

control resistor (PCC) set tp 0011.
 3: When operated in the low-speed mode with the PCC set to 0000.

μ PD75112(A), 75116(A)**Capacitance**(Ta = 25 °C, V_{DD} = 0 V)

| Parameter | Symbol | Test Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------------|------------------|---|------|------|------|------|
| Input capacitance | C _{IN} | f = 1 MHz 0 V for pins except the measured pins | | | 15 | pF |
| Output capacitance | C _{OUT} | | | | 15 | pF |
| Input/output capacitance | C _{IO} | | | | 15 | pF |

Comparator Characteristics(Ta = -40 to +85 °C, V_{DD} = 4.5 to 6.0 V)

| Parameter | Symbol | Test Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------------------|--------------------|-------------------|------|------|-----------------|------|
| Comparison accuracy | V _{ACOMP} | | | | ±100 | mV |
| Threshold voltage | V _{TH} | | 0 | | V _{DD} | V |
| PTH input voltage | V _{IPTH} | | 0 | | V _{DD} | V |
| Comparator circuit consumption | | Set PTHM7 to "1". | | 1 | | mA |


Power-On Reset Circuit Characteristics (Mask Option)

(Ta = -40 to +85 °C)

| Parameter | Symbol | Test Conditions | MIN. | TYP. | MAX. | Unit |
|--|-------------------|----------------------------|------|------|------|------|
| Power-on reset operating voltage high | V _{DDH} | | 4.5 | | 6.0 | V |
| Power-on reset operating voltage low | V _{DDL} | | 0 | | 0.2 | V |
| Supply voltage rise time | t _r | | 10 | | *1 | μs |
| Supply voltage off time | t _{off} | | 1 | | | s |
| Power-on reset circuit current consumption*2 | I _{DDPR} | V _{DD} = 5 V ±10% | | 10 | 100 | μA |
| | | V _{DD} = 2.5 V | | 2 | 20 | μA |

*1: 2¹⁷/f_{xx} (31.3 ms when f_{xx} = 4.19MHz)

2: Current flow upon power-on reset or with an on-chip power-on flag

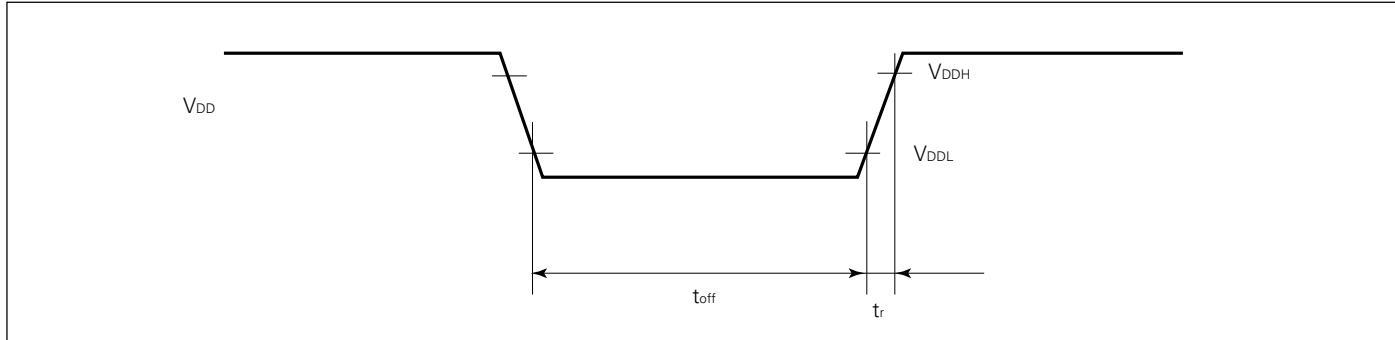
**Note: Start the power supply smoothly.**

AC Characteristics(Ta = -40 to +85 °C, V_{DD} = 2.7 to 6.0 V)

| Parameter | Symbol | Test Conditions | | MIN. | TYP. | MAX. | Unit |
|---|--|--------------------------------|--------|------------------------|------|------|---------|
| CPU clock cycle time* (min. instruction execution time = 1 machine cycle) | t _{CY} | V _{DD} = 4.5 to 6.0 V | | 0.95 | | 32 | μ s |
| | | | | 3.8 | | 32 | μ s |
| Tl0, Tl1 input frequency | f _{TI} | V _{DD} = 4.5 to 6.0 V | | 0 | | 1 | MHz |
| | | | | 0 | | 275 | kHz |
| Tl0, Tl1 input high and low-level widths | t _{TIH} , t _{TIL} | V _{DD} = 4.5 to 6.0 V | | 0.48 | | | μ s |
| | | | | 1.8 | | | μ s |
| SCK cycle time | t _{KCY} | V _{DD} = 4.5 to 6.0 V | Input | 0.8 | | | μ s |
| | | | Output | 0.95 | | | μ s |
| | | | Input | 3.2 | | | μ s |
| | | | Output | 3.8 | | | μ s |
| SCK high and low-level widths | t _{KH} , t _{KL} | V _{DD} = 4.5 to 6.0 V | Input | 0.4 | | | μ s |
| | | | Output | t _{KCY} /2-50 | | | ns |
| | | | Input | 1.6 | | | μ s |
| | | | Output | t _{KCY} /2-50 | | | ns |
| SI setup time (to SCK \uparrow) | t _{SIK} | | | 100 | | | ns |
| SI hold time (from SCK \uparrow) | t _{KSI} | | | 400 | | | ns |
| S0 output delay time from SCK \downarrow | t _{KSO} | V _{DD} = 4.5 to 6.0 V | | | | 300 | ns |
| | | | | | | 1000 | ns |
| INT0 to INT4 High and low-level widths | t _{INTH} , t _{INTL} | | | 5 | | | μ s |
| RESET low-level width | t _{RSR} | | | 5 | | | μ s |

μ PD75112(A), 75116(A)


*: The cycle time of the CPU clock (ϕ) is determined by the input frequency of the ceramic crystal oscillator and the setting of the processor clock control register (PCC). The cycle time (tcv) for V_{DD} is shown below.



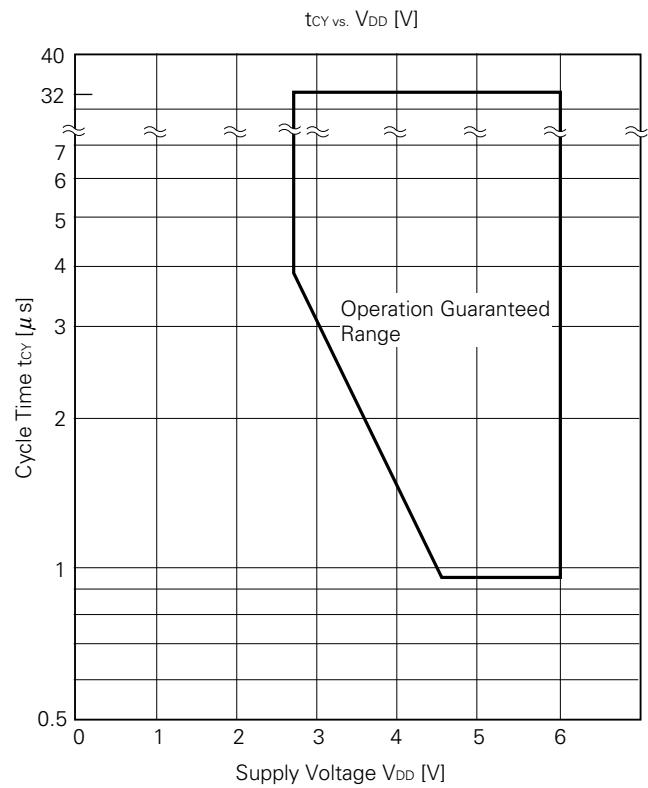



AC Timing Test Point (Except for Ports 0, 1, T10, T11, X1, X2 and RESET)



Clock Timing

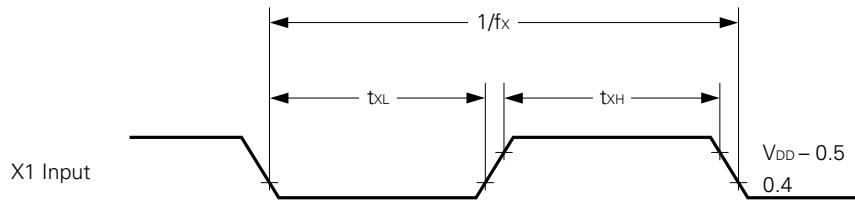

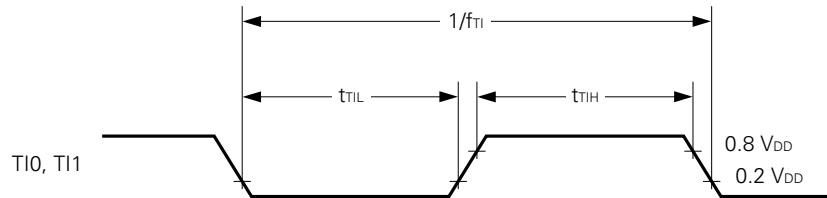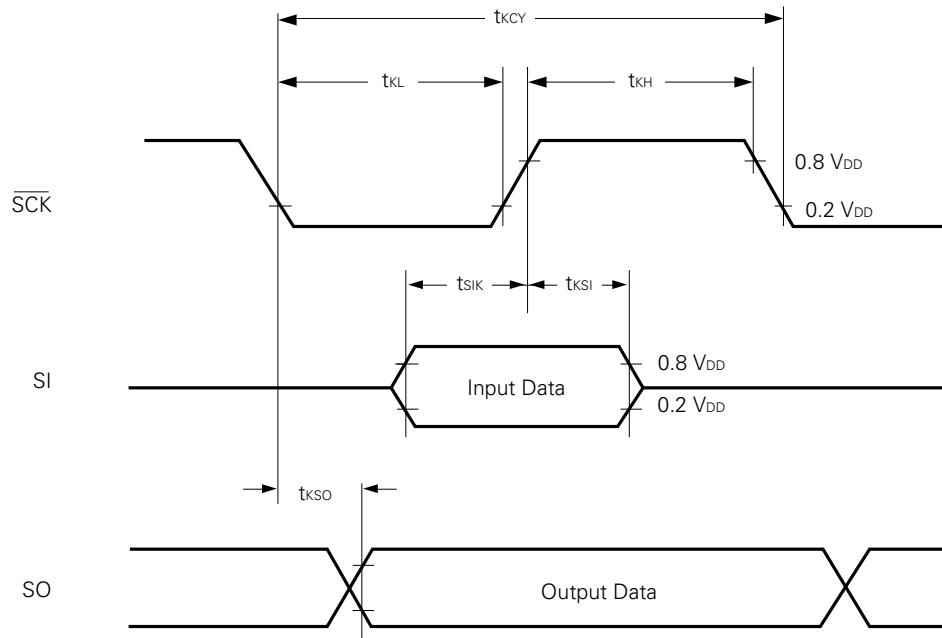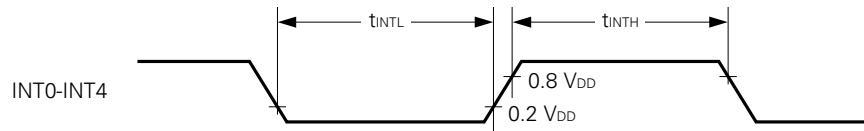TI0 and TI1 Input Timing**Serial Transfer Timing****Interrupt Input Timing**

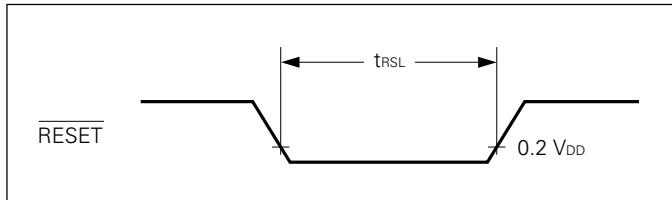μ PD75112(A), 75116(A)***RESET Input Timing*****Data Memory STOP Mode Low Supply Voltage Data Retention Characteristics**

(Ta = -40 to +85 °C)



| Parameter | Symbol | Test Conditions | MIN. | TYP. | MAX. | Unit |
|---------------------------------------|--------|--------------------------------------|------|-------------|------|---------|
| Data retention supply voltage | VDDDR | | 2.0 | | 6.0 | V |
| Data retention supply current*1 | VDDDR | VDDDR = 2.0 V | | 0.1 | 10 | μ A |
| Release signal set time | tsREL | | 0 | | | μ s |
| Oscillation stabilization wait time*2 | tWAIT | Release by $\overline{\text{RESET}}$ | | $2^{17}/fx$ | | ms |
| | | Release by interrupt request | | *3 | | ms |

* 1: Current for the on-chip pull-up resistor, power-on circuit (mask option) and comparator circuit is not included.

2: The oscillation stabilizing time is intended to stop the CPU to prevent any unstable operation at the start of oscillation.


3: Depends on the following setting of the basic interval timer mode register (BTM).

| BTM3 | BTM2 | BTM1 | BTM0 | Wait Time (fxx=4.19 MHz Values in Parentheses) |
|------|------|------|------|---|
| — | 0 | 0 | 0 | $2^{20}/fx$ (approx. 250 ms) |
| — | 0 | 1 | 1 | $2^{17}/fx$ (approx. 31.3 ms) |
| — | 1 | 0 | 1 | $2^{15}/fx$ (approx. 7.82 ms) |
| — | 1 | 1 | 1 | $2^{13}/fx$ (approx. 1.95 ms) |

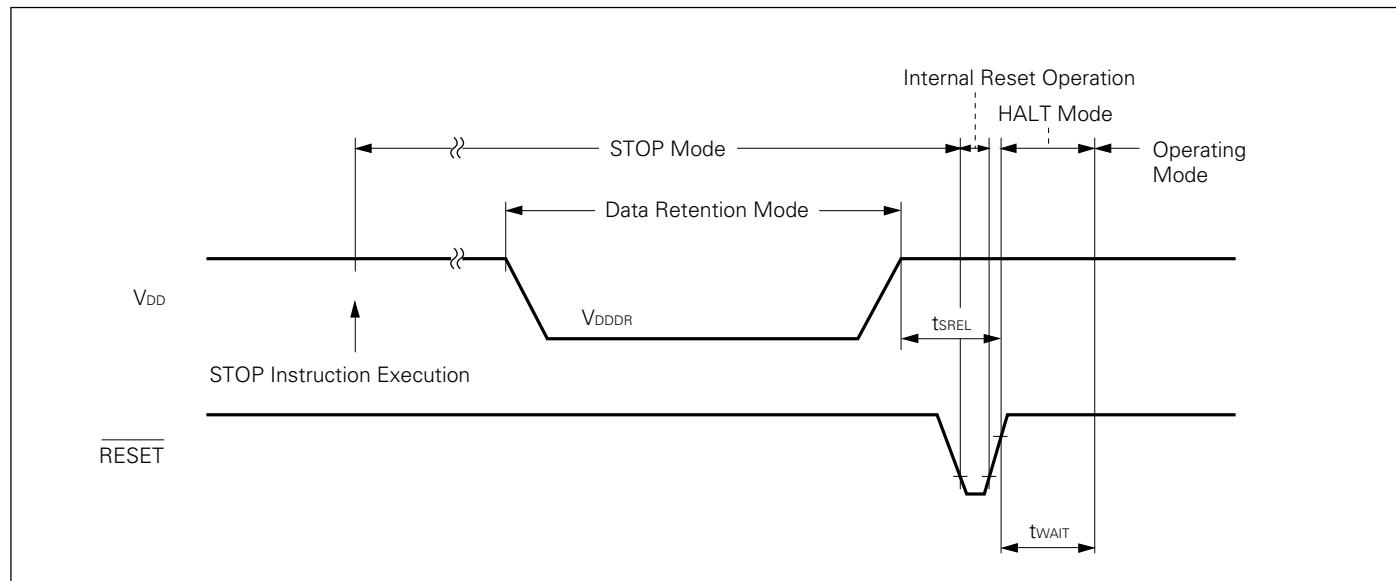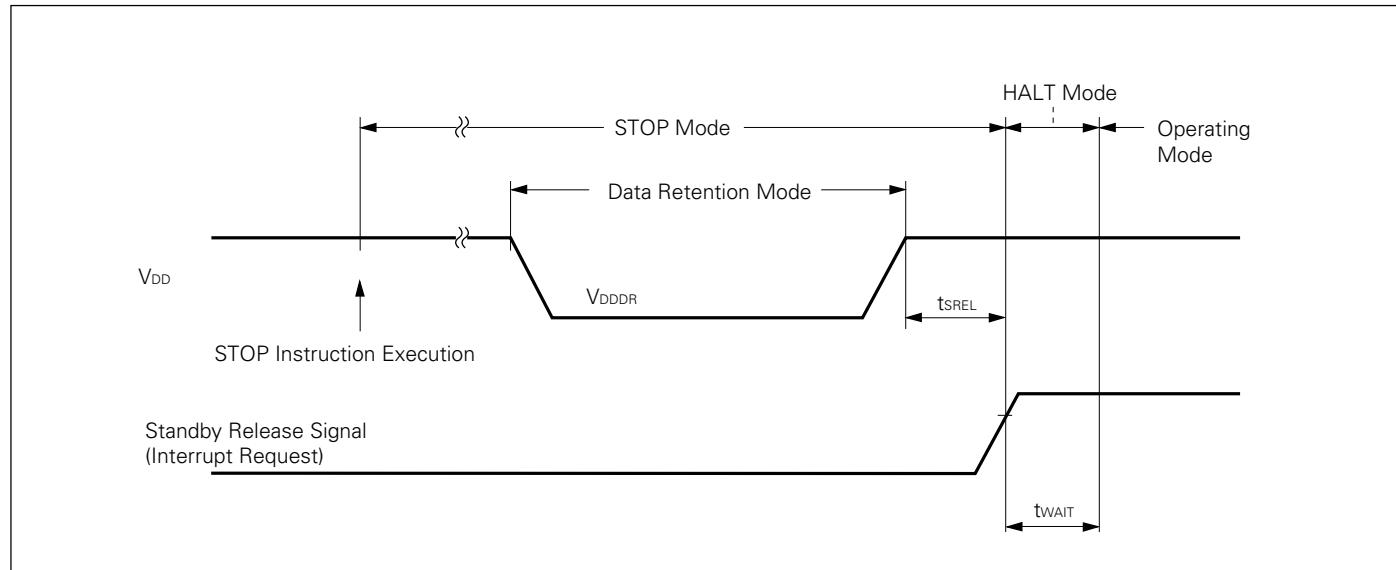Data Retention Timing (STOP Mode Release by RESET)**Data Retention Timing (Standby Release Signal: STOP Mode Release by Interrupt Signal)**

12. Packing Information

64 PIN PLASTIC SHRINK DIP (750 mil)

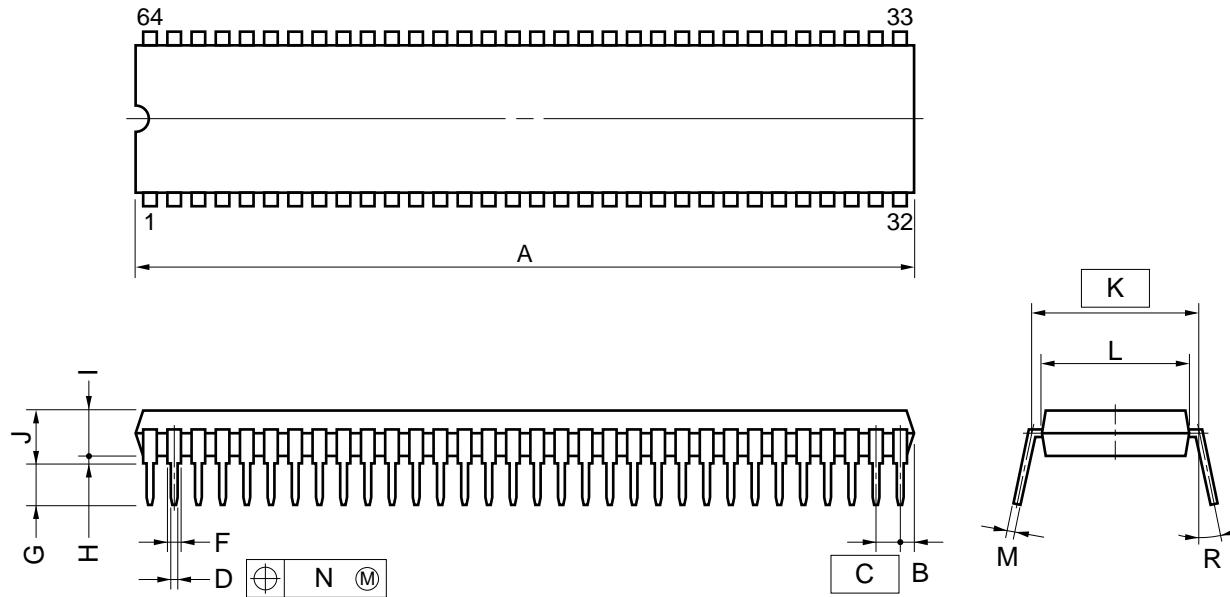


NOTE

- 1) Each lead centerline is located within 0.17 mm (0.007 inch) of its true position (T.P.) at maximum material condition.
- 2) Item "K" to center of leads when formed parallel.

| ITEM | MILLIMETERS | INCHES |
|------|--|---|
| A | 58.68 MAX. | 2.311 MAX. |
| B | 1.78 MAX. | 0.070 MAX. |
| C | 1.778 (T.P.) | 0.070 (T.P.) |
| D | 0.50±0.10 | 0.020 ^{+0.004} _{-0.005} |
| F | 0.9 MIN. | 0.035 MIN. |
| G | 3.2±0.3 | 0.126±0.012 |
| H | 0.51 MIN. | 0.020 MIN. |
| I | 4.31 MAX. | 0.170 MAX. |
| J | 5.08 MAX. | 0.200 MAX. |
| K | 19.05 (T.P.) | 0.750 (T.P.) |
| L | 17.0 | 0.669 |
| M | 0.25 ^{+0.10} _{-0.05} | 0.010 ^{+0.004} _{-0.003} |
| N | 0.17 | 0.007 |
| R | 0~15° | 0~15° |

P64C-70-750A,C-1

64-Pin Plastic QFP (14×20) (Unit: mm) ★

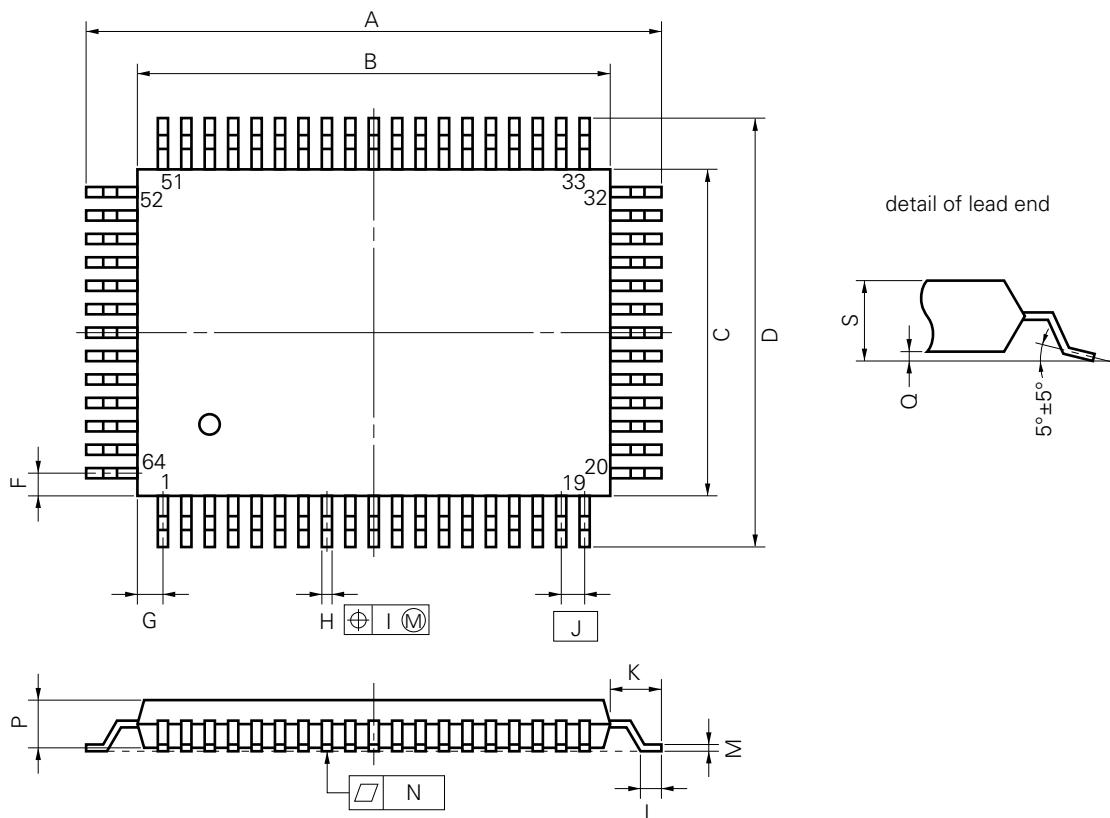


P64GF-100-3B8,3BE,3BR-1


NOTE

Each lead centerline is located within 0.20 mm (0.008 inch) of its true position (T.P.) at maximum material condition.

| ITEM | MILLIMETERS | INCHES |
|------|--|---|
| A | 23.6±0.4 | 0.929±0.016 |
| B | 20.0±0.2 | 0.795 ^{+0.009} _{-0.008} |
| C | 14.0±0.2 | 0.551 ^{+0.009} _{-0.008} |
| D | 17.6±0.4 | 0.693±0.016 |
| F | 1.0 | 0.039 |
| G | 1.0 | 0.039 |
| H | 0.40±0.10 | 0.016 ^{+0.004} _{-0.005} |
| I | 0.20 | 0.008 |
| J | 1.0 (T.P.) | 0.039 (T.P.) |
| K | 1.8±0.2 | 0.071 ^{+0.008} _{-0.009} |
| L | 0.8±0.2 | 0.031 ^{+0.009} _{-0.008} |
| M | 0.15 ^{+0.10} _{-0.05} | 0.006 ^{+0.004} _{-0.003} |
| N | 0.12 | 0.005 |
| P | 2.7 | 0.106 |
| Q | 0.1±0.1 | 0.004±0.004 |
| S | 3.0 MAX. | 0.119 MAX. |

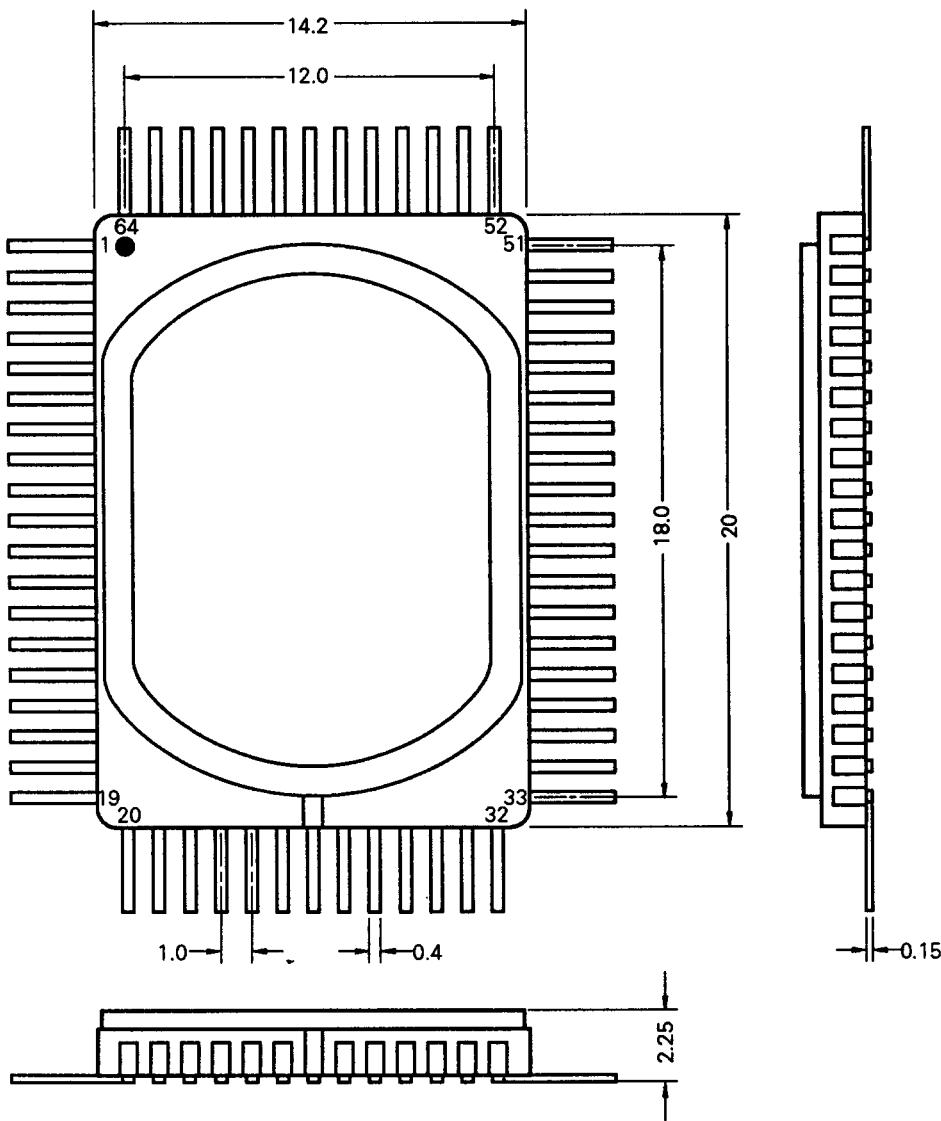μ PD75112(A), 75116(A)**64-Pin Ceramic QFP for ES (Reference Drawing) (Unit: mm)****Cautions**

- 1: The metal cap is connected to pin 26 and is set to Vss (GND) level.
- 2: The lead wire at the bottom is formed diagonally.
- 3: Since the cutting treatment of the lead wire edge is not under process control, the lead lengths are not specified.

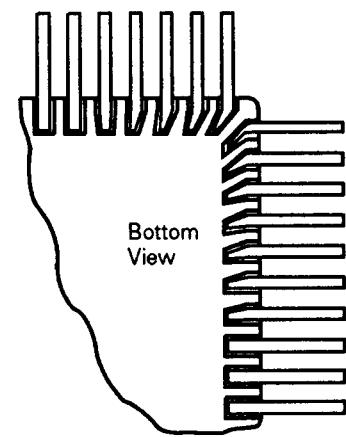

13. Recommended Soldering Conditions ★

The μ PD75112(A) and 75116(A) should be soldered and mounted under the conditions recommended in the table below.

For detail of recommended soldering conditions, refer to the information document "**Surface Mount Technology Manual**" (IEI-1207).

For soldering methods and conditions other than those recommended below, contact our sales personnel.

Table 13-1 Surface Mounting Type Soldering Conditions

μ PD75112GF(A)-xxx-3BE : 64-pin plastic QFP (14 × 20mm)
 μ PD75116GF(A)-xxx-3BE : 64-pin plastic QFP (14 × 20mm)

| Soldering Method | Soldering Conditions | Recommended Condition Symbol |
|------------------|---|------------------------------|
| Infrared reflow | Package peak temperature: 230 °C Duration: 30 sec. max. (at 210°C above) Number of times: Once | IR30-00-1 |
| VPS | Package peak temperature: 215 °C Duration: 40 sec. max. (at 200°C above) Number of times: Once | VP15-00-1 |
| Wave soldering | Solder bath temperature: 260 °C max. Duration: 10 sec. max. Number of times: Once Preliminary heat temperature: 120 °C max. (Package surface temperature) | WS60-00-1 |
| Pin part heating | Pin part temperature: 300 °C max. Duration: 3 sec. max. (per device side) | _____ |

Note: Use more than one soldering method should be avoided (except in the case of pin part).

Table 13-2 Insertion Type Soldering Conditions

μ PD75112CW(A)-xxx: 64-pin plastic shrink DIP (750 mil)
 μ PD75116CW(A)-xxx: 64-pin plastic shrink DIP (750 mil)

| Soldering Method | Soldering Conditions |
|---------------------------------|---|
| Wave soldering (lead part only) | Solder bath temperature: 260 °C max. Duration: 10 sec. max. |
| Pin part heating | Pin part temperature: 260 °C max. Duration: 10 sec. max. |

Note: Wave soldering is only for the lead part in order that jet solder can not contact with the chip.

Notice

A version of this product with improved recommended soldering conditions is available.
 For details (improvements such as infrared reflow peak temperature extension (235 °C, number of times: twice, relaxation of time limit), contact NEC sales

μPD75112(A), 75116(A)

★ APPENDIX A. Differences between *μPD751xx(A)* Series Products and Related PROM Products

| Product Name Item | | <i>μPD75104(A)</i> | <i>μPD75106(A)</i> | <i>μPD75108(A)</i> | <i>μPD75112(A)</i> | <i>μPD75116(A)</i> | <i>μPD75P108B</i> | <i>μPD75P116</i> |
|------------------------|------------------|---|----------------------------|----------------------------|---|-----------------------------|--|---|
| ROM Configuration | | Mask ROM | | | | | PROM | |
| ROM (bit) | | 0000H to 0FFFH 4096 × 8 | 0000H to 177FH 6016 × 8 | 0000H to 1F7FH 8064 × 8 | 0000H to 2F7FH 12160 × 8 | 0000H to 3F7FH 16256 × 8 | 0000H to 1F7FH 8064 × 8 | 0000H to 3F7FH 16256 × 8 |
| RAM (bit) | | 320 × 4 Bank 0: 256 × 4 Bank 1: 64 × 4 | | | 512 × 4 Bank 0: 256 × 4 Bank 1: 256 × 4 | | | 512 × 4 Bank 0: 256 × 4 Bank 1: 256 × 4 |
| Instruction set | | High end (Only <i>μPD75104(A)</i> does not incorporate BR !addr instruction). | | | | | High end | |
| I/O line | Total | 58 | | | | | | |
| | Input/ output | <ul style="list-style-type: none"> • CMOS input/output: 32 • +12 V withstand N-ch voltage open-drain input/output: 12 (Pull-up resistor can be on-chip by mask option.) | | | | | <ul style="list-style-type: none"> • CMOS input/output: 32 • +12 V withstand N-ch open-drain input/ output: 12 Each pin can directly drive LED: 44 | |
| | Input | <ul style="list-style-type: none"> • CMOS input/output: 10 • Comparator: 4 | | | | | | |
| Power-on reset circuit | | Can be on-chip by mask option | | | | | None | |
| Power-on flag | | | | | | | | |
| Supply voltage range | | 2.7 to 6.0 V | | | | | 2.7 to 6.0 V | 5 V±10% |
| Pin connection | | Differs depending on package | | | | | Differs depending on package (with VPP pin) | |
| Quality grade | | Special | | | | | Standard | |
| Package | | <ul style="list-style-type: none"> • 64-pin plastic shrink DIP (750 mil) • 64-pin plastic QFP (14 × 20 mm) | | | | | • 64-pin plastic shrink DIP (750 mil) | • 64-pin plastic shrink DIP (750 mil) |
| | | | | | | | • 64-pin ceramic shrink DIP (with window) | • 64-pin plastic QFP (14 × 20 mm) |

APPENDIX B. Development Tools

The following tools are available for the development of systems for which the μ PD75116(A) is used.

| | | |
|----------|--------------------------------|--|
| Hardware | IE-75000-R*1 IE-75001-R | 75X series in-circuit emulator |
| | IE-75000-R-EM*2 | Emulation board for IE-75000R and IE-75001-R. |
| | EP-75108CW-R | Emulation probe for μ PD75112CW(A) and 75116CW(A). |
| | EP-75108GF-R EV-9200G64 | Emulation probe for μ PD75112GF(A) and 75116GF(A). 64-pin conversion socket EV-9200G64 added. |
| | PG-1500 | PROM programmer |
| | PA-75P108CW | μ PD75P116CW PROM programmer adapter connected to PG-1500 |
| | PA-75P116GF | μ PD75P116GF PROM programmer adapter connected to PG-1500 |
| Software | IE control program | Host machine • PC-9800 series (MS-DOS™ Ver. 3.30 to 5.00A*3) • IBM PC/AT™ (PC DOS™ Ver. 3.1) |
| | PG-1500 controller | |
| | RA75X relocatable assembler | |

*1: Maintenance product

2: Not incorporated in the IE-75001-R.

3: The task swap function, which is provided with Ver. 5.00/5.00A,
is not available with this software.

Remarks: For development tools manufactured by a
third party, see the "**75X Series Selection
Guide**" (IF-151)".

μPD75112(A), 75116(A)

★ APPENDIX C. Related Documentations

List of Device Related Documentations

| Document Name | | Document Number |
|-------------------------------|---|-----------------|
| User's Manual | | IEM-1260 |
| Instruction Application Table | | — |
| Application Note | (I) Introductory Volume | IEM-1139 |
| | (II) Remote Control Reception Volume | IEM-1281 |
| | (III) Bar-Code Reader Volume | IEM-1265 |
| | (IV) IC Control for MSK Transmission/Reception Volume | IEA-1278 |
| 75X Series Selection Guide | | IF-1027 |

List of Development Tools Related Documentations

| Document Name | | Document Number |
|---------------|---------------------------------------|------------------|
| Hardware | IE-75000-R/IE-75001-R User's Manual | EEU-1416 |
| | IE-75000-R-EM User's Manual | EEU-1294 |
| | EP-75108CW-R User's Manual | EEU-1308 |
| | EP-75108GF-R User's Manual | EEU-1318 |
| | PG-1500 User's Manual | EEU-1335 |
| Software | RA75X Assembler Package User's Manual | Operation Volume |
| | | Language Volume |
| | PG-1500 Controller User's Manual | EEU-1291 |

List of Other Related Documentations

| Document Name | | Document Number |
|--|--|-----------------|
| Package Manual | | IEI-1213 |
| Surface Mount Technology Manual | | IEI-1207 |
| Quality Grade on NEC Semiconductor Devices | | IEI-1209 |
| NEC Semiconductor Device Reliability & Quality Control | | — |
| Electrostatic Discharge (ESD) Test | | — |
| Semiconductor Devices Quality Guarantee Guide | | MEI-1202 |
| Microcomputer Related Products Guide Other Manufactures Volume | | — |

Note: The contents of the above related documents are subject to change without notice. The latest documents should be used for design, etc.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

The devices listed in this document are not suitable for use in aerospace equipment, submarine cables, nuclear reactor control systems and life support systems. If customers intend to use NEC devices for above applications or they intend to use "Standard" quality grade NEC devices for applications not intended by NEC, please contact our sales people in advance.

Application examples recommended by NEC Corporation

Standard: Computer, Office equipment, Communication equipment, Test and Measurement equipment, Machine tools, Industrial robots, Audio and Visual equipment, Other consumer products, etc.

Special: Automotive and Transportation equipment, Traffic control systems, Antidisaster systems, Anticrime systems, etc.

M4 92.6

MS-DOS is a trademark of Microsoft Corporation.
PC/AT and PC DOS are trademarks of IBM Corporations.