

# M5M51008BP,FP,VP,RV,KV,KR -55L,-70L,-10L, -55LL,-70LL,-10LL

1048576-BIT(131072-WORD BY 8-BIT)CMOS STATIC RAM

**DESCRIPTION**

The M5M51008BP,FP,VP,RV,KV,KR are a 1048576-bit CMOS static RAM organized as 131072 word by 8-bit which are fabricated using high-performance triple polysilicon CMOS technology. The use of resistive load NMOS cells and CMOS periphery result in a high density and low power static RAM.

They are low standby current and low operation current and ideal for the battery back-up application.

The M5M51008BVP,RV,KV,KR are packaged in a 32-pin thin small outline package which is a high reliability and high density surface mount device(SMD).Two types of devices are available. VP,KV(normal lead bend type package),RV,KR(reverse lead bend type package). Using both types of devices, it becomes very easy to design a printed circuit board.

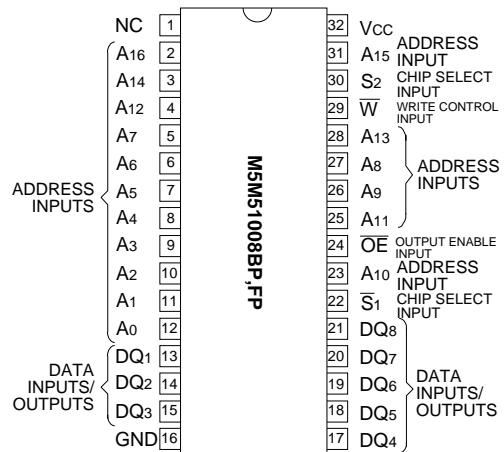
**FEATURES**

Type name	Access time (max)	Power supply current	
		Active (1MHz) (max)	stand-by (max)
M5M51008BP,FP,VP,RV,KV,KR-55L	55ns	15mA	100µA (Vcc=5.5V)
M5M51008BP,FP,VP,RV,KV,KR-70L	70ns		
M5M51008BP,FP,VP,RV,KV,KR-10L	100ns	15mA	20µA (Vcc=5.5V) 0.3µA (Vcc=3.0V,typ)
M5M51008BP,FP,VP,RV,KV,KR-55LL	55ns		
M5M51008BP,FP,VP,RV,KV,KR-70LL	70ns	15mA	20µA (Vcc=5.5V) 0.3µA (Vcc=3.0V,typ)
M5M51008BP,FP,VP,RV,KV,KR-10LL	100ns		

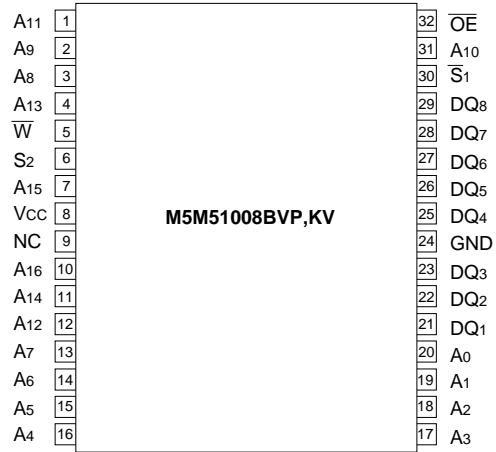
- Single +5V power supply
- Low stand-by current 0.3µA (typ.)
- Directly TTL compatible : All inputs and outputs
- Easy memory expansion and power down by S1,S2
- Data hold on +2V power supply
- Three-state outputs : OR - tie capability
- OE prevents data contention in the I/O bus
- Common data I/O
- Package
  - M5M51008BP ..... 32pin 600mil DIP
  - M5M51008BFP ..... 32pin 525mil SOP
  - M5M51008BVP,RV ..... 32pin 8 X 20 mm<sup>2</sup> TSOP
  - M5M51008BKV,KR ..... 32pin 8 X 13.4 mm<sup>2</sup> TSOP

**APPLICATION**

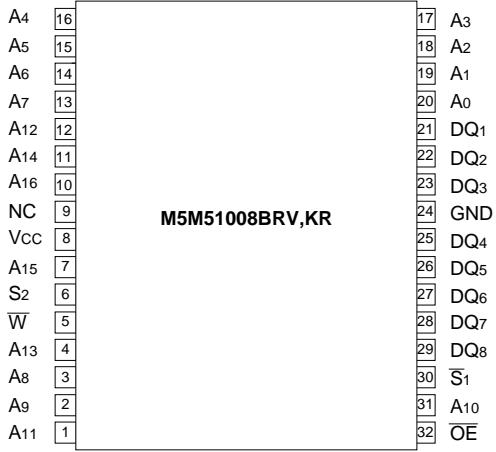
Small capacity memory units

**PIN CONFIGURATION (TOP VIEW)**

Outline 32P4(P), 32P2M-A(FP)



Outline 32P3H-E(VP), 32P3K-B(KV)



Outline 32P3H-F(RV), 32P3K-C(KR)

NC : NO CONNECTION

**FUNCTION**

The operation mode of the M5M51008B series are determined by a combination of the device control inputs  $\bar{S}_1$ ,  $S_2$ ,  $\bar{W}$  and  $\bar{OE}$ .

Each mode is summarized in the function table.

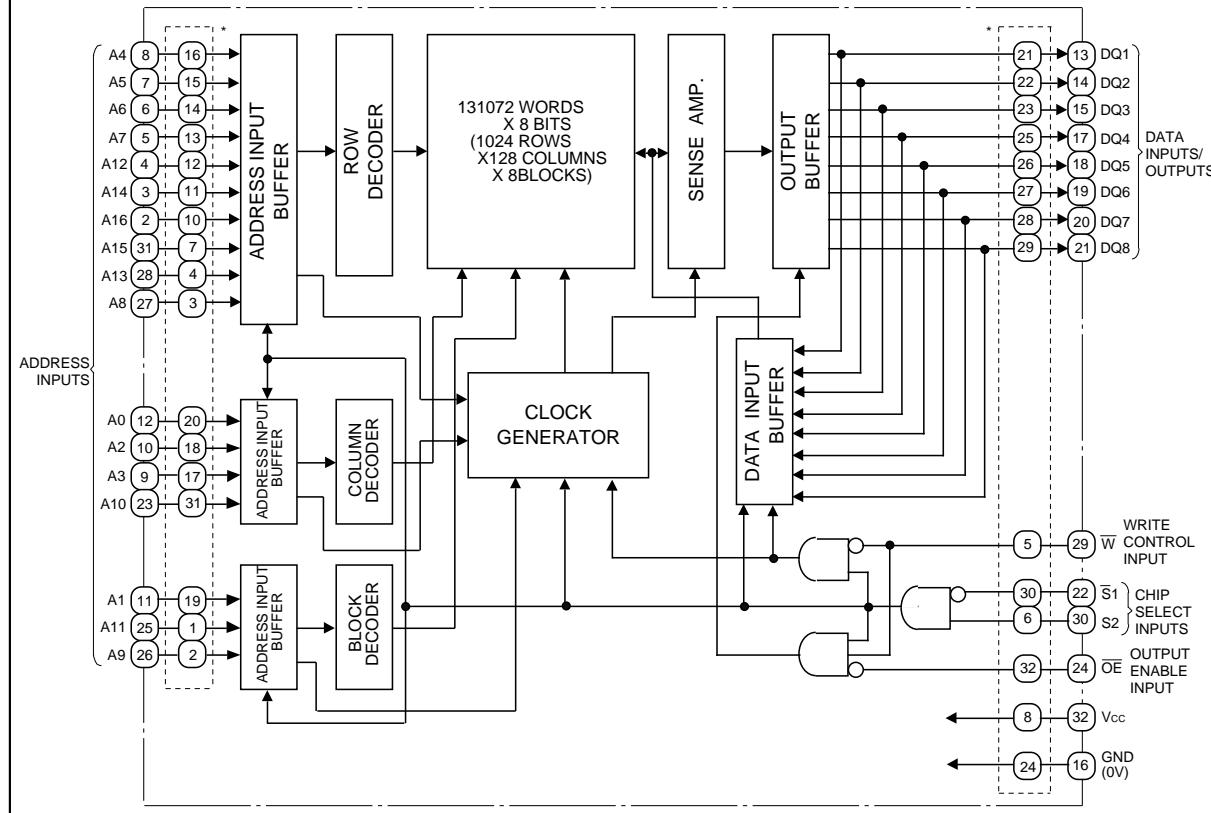
A write cycle is executed whenever the low level  $\bar{W}$  overlaps with the low level  $\bar{S}_1$  and the high level  $S_2$ . The address must be set up before the write cycle and must be stable during the entire cycle. The data is latched into a cell on the trailing edge of  $\bar{W}$ ,  $\bar{S}_1$  or  $S_2$ , whichever occurs first, requiring the set-up and hold time relative to these edge to be maintained. The output enable input  $\bar{OE}$  directly controls the output stage. Setting the  $\bar{OE}$  at a high level, the output stage is in a high-impedance state, and the data bus contention problem in the write cycle is eliminated.

A read cycle is executed by setting  $\bar{W}$  at a high level and  $\bar{OE}$  at a low level while  $\bar{S}_1$  and  $S_2$  are in an active state ( $\bar{S}_1=L$ ,  $S_2=H$ ).

When setting  $\bar{S}_1$  at a high level or  $S_2$  at a low level, the chip are in a non-selectable mode in which both reading and writing are disabled. In this mode, the output stage is in a high-impedance state, allowing OR-tie with other chips and memory expansion by  $\bar{S}_1$  and  $S_2$ . The power supply current is reduced as low as the stand-by current which is specified as  $I_{CC3}$  or  $I_{CC4}$ , and the memory data can be held at +2V power supply, enabling battery back-up operation during power failure or power-down operation in the non-selected mode.

**FUNCTION TABLE**

$\bar{S}_1$	$S_2$	$\bar{W}$	$\bar{OE}$	Mode	DQ	$I_{CC}$
X	L	X	X	Non selection	High-impedance	Stand-by
H	X	X	X	Non selection	High-impedance	Stand-by
L	H	L	X	Write	Din	Active
L	H	H	L	Read	Dout	Active
L	H	H	H		High-impedance	Active

**BLOCK DIAGRAM**

\* Pin numbers inside dotted line show those of TSOP

**M5M51008BP,FP,VP,RV,KV,KR -55L,-70L,-10L,****-55LL,-70LL,-10LL****1048576-BIT(131072-WORD BY 8-BIT)CMOS STATIC RAM****ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Conditions	Ratings	Unit
V <sub>cc</sub>	Supply voltage	With respect to GND	-0.3*~7	V
V <sub>i</sub>	Input voltage		-0.3*~V <sub>cc</sub> + 0.3	V
V <sub>o</sub>	Output voltage		0~V <sub>cc</sub>	V
P <sub>d</sub>	Power dissipation	T <sub>a</sub> =25°C	700	mW
T <sub>opr</sub>	Operating temperature		0~70	°C
T <sub>stg</sub>	Storage temperature		-65~150	°C

\* -3.0V in case of AC ( Pulse width 30ns )

**DC ELECTRICAL CHARACTERISTICS** (T<sub>a</sub>=0~70°C, V<sub>cc</sub>=5V±10%, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V <sub>iH</sub>	High-level input voltage		2.2		V <sub>cc</sub> +0.3V	V
V <sub>iL</sub>	Low-level input voltage		-0.3*		0.8	V
V <sub>OH1</sub>	High-level output voltage 1	I <sub>OH</sub> = -0.5mA	2.4			V
V <sub>OH2</sub>	High-level output voltage 2	I <sub>OH</sub> = -0.05mA	V <sub>cc</sub> -0.5V			V
V <sub>OL</sub>	Low-level output voltage	I <sub>OL</sub> =2mA			0.4	V
I <sub>i</sub>	Input current	V <sub>i</sub> =0~V <sub>cc</sub>			±1	µA
I <sub>o</sub>	Output current in off-state	S <sub>1</sub> =V <sub>iH</sub> or S <sub>2</sub> =V <sub>iL</sub> or OE=V <sub>iH</sub> V <sub>i/o</sub> =0~V <sub>cc</sub>			±1	µA
I <sub>cc1</sub>	Active supply current (AC, MOS level)	S <sub>1</sub> 0.2V, S <sub>2</sub> V <sub>cc</sub> -0.2V, other inputs 0.2V or V <sub>cc</sub> -0.2V Output-open(duty 100%)	Min cycle 1MHz	35 4	70 15	mA
I <sub>cc2</sub>	Active supply current (AC, TTL level)	S <sub>1</sub> =V <sub>iL</sub> , S <sub>2</sub> =V <sub>iH</sub> , other inputs=V <sub>iH</sub> or V <sub>iL</sub> Output-open(duty 100%)	Min cycle 1MHz	38 5	70 15	mA
I <sub>cc3</sub>	Stand-by current	1) S <sub>2</sub> 0.2V 2) S <sub>1</sub> V <sub>cc</sub> -0.2V, S <sub>2</sub> V <sub>cc</sub> -0.2V other inputs=0~V <sub>cc</sub>	-L -LL		100 20	µA
I <sub>cc4</sub>	Stand-by current	S <sub>1</sub> =V <sub>iH</sub> or S <sub>2</sub> =V <sub>iL</sub> , other inputs=0~V <sub>cc</sub>			3	mA

\* -3.0V in case of AC ( Pulse width 30ns )

\*\* inside ( ) is a value of -55L,-55LL

**CAPACITANCE** (T<sub>a</sub>=0~70°C, V<sub>cc</sub>=5V±10%, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
C <sub>i</sub>	Input capacitance	V <sub>i</sub> =GND, V <sub>i</sub> =25mVrms, f=1MHz			6	pF
C <sub>o</sub>	Output capacitance	V <sub>o</sub> =GND, V <sub>o</sub> =25mVrms, f=1MHz			8	pF

Note 1: Direction for current flowing into an IC is positive (no mark).

2: Typical value is V<sub>cc</sub> = 5V, T<sub>a</sub> = 25°C

# M5M51008BP,FP,VP,RV,KV,KR -55L,-70L,-10L, -55LL,-70LL,-10LL

1048576-BIT(131072-WORD BY 8-BIT)CMOS STATIC RAM

**AC ELECTRICAL CHARACTERISTICS** ( $T_a=0\sim70^\circ C$ ,  $V_{CC}=5V\pm10\%$ , unless otherwise noted)

**(1) MEASUREMENT CONDITIONS**

Input pulse level .....  $V_{IH}=2.4V, V_{IL}=0.6V$  (-70L,-10L,-70LL,-10LL)  
 $V_{IH}=3.0V, V_{IL}=0.0V$  (-55L,-55LL)

Input rise and fall time ..... 5ns

Reference level .....  $V_{OH}=V_{OL}=1.5V$

Output loads ..... Fig.1,  $C_L=100pF$  (-10L,-10LL,  
 $C_L=30pF$  (-55L,-70L,-55LL,-70LL)  
 $C_L=5pF$  (for  $t_{en}, t_{dis}$ )

Transition is measured  $\pm 500mV$  from steady state voltage. (for  $t_{en}, t_{dis}$ )

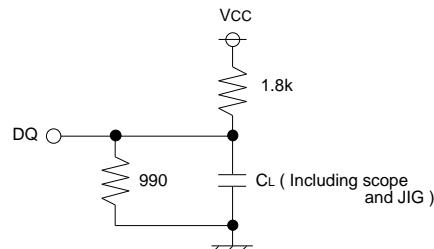


Fig.1 Output load

**(2) READ CYCLE**

Symbol	Parameter	Limits						Unit	
		-55L,LL		-70L,LL		-10L,LL			
		Min	Max	Min	Max	Min	Max		
tcR	Read cycle time	55		70		100		ns	
ta(A)	Address access time		55		70		100	ns	
ta(S1)	Chip select 1 access time		55		70		100	ns	
ta(S2)	Chip select 2 access time		55		70		100	ns	
ta(OE)	Output enable access time		30		35		50	ns	
t <sub>dis</sub> (S1)	Output disable time after S1 high		20		25		35	ns	
t <sub>dis</sub> (S2)	Output disable time after S2 low		20		25		35	ns	
t <sub>dis</sub> (OE)	Output disable time after OE high		20		25		35	ns	
t <sub>en</sub> (S1)	Output enable time after S1 low	5		10		10		ns	
t <sub>en</sub> (S2)	Output enable time after S2 high	5		10		10		ns	
t <sub>en</sub> (OE)	Output enable time after OE low	5		5		5		ns	
t <sub>v</sub> (A)	Data valid time after address	5		10		10		ns	

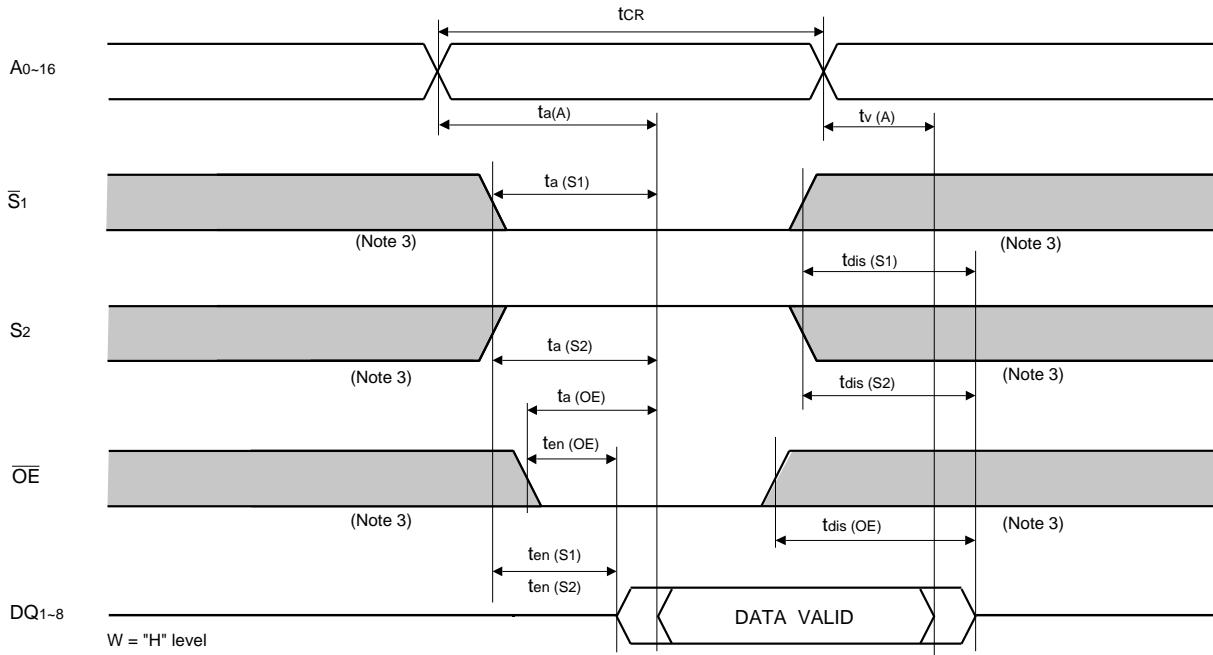
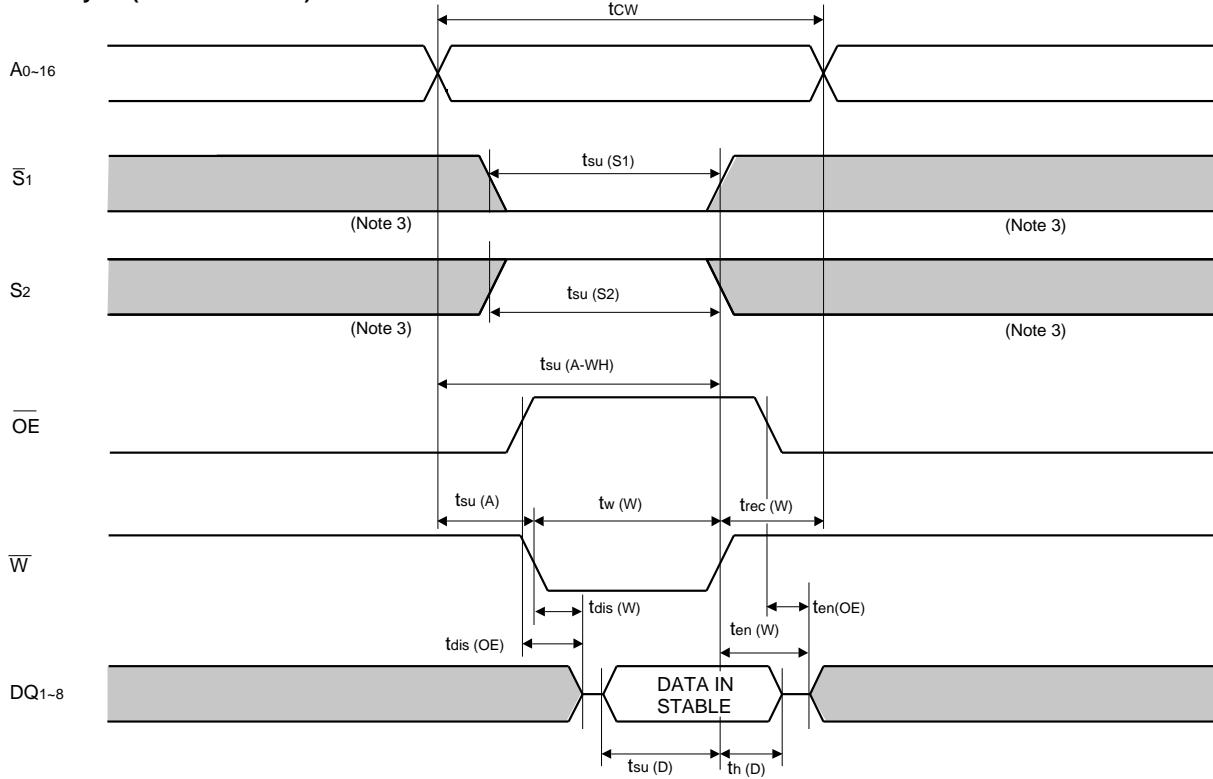
**(3) WRITE CYCLE**

Symbol	Parameter	Limits						Unit	
		-55L,LL		-70L,LL		-10L,LL			
		Min	Max	Min	Max	Min	Max		
tcw	Write cycle time	55		70		100		ns	
tw(W)	Write pulse width	45		55		75		ns	
tsu(A)	Address setup time	0		0		0		ns	
tsu(A-WH)	Address setup time with respect to W̄	50		65		85		ns	
tsu(S1)	Chip select 1 setup time	50		65		85		ns	
tsu(S2)	Chip select 2 setup time	50		65		85		ns	
tsu(D)	Data setup time	25		30		40		ns	
t <sub>h</sub> (D)	Data hold time	0		0		0		ns	
t <sub>rec</sub> (W)	Write recovery time	0		0		0		ns	
t <sub>dis</sub> (W)	Output disable time from W̄ low		20		25		35	ns	
t <sub>dis</sub> (OE)	Output disable time from OĒ high		20		25		35	ns	
t <sub>en</sub> (W)	Output enable time from W̄ high	5		5		5		ns	
t <sub>en</sub> (OE)	Output enable time from OĒ low	5		5		5		ns	

**M5M51008BP,FP,VP,RV,KV,KR -55L,-70L,-10L,  
-55LL,-70LL,-10LL**  
**1048576-BIT(131072-WORD BY 8-BIT)CMOS STATIC RAM**

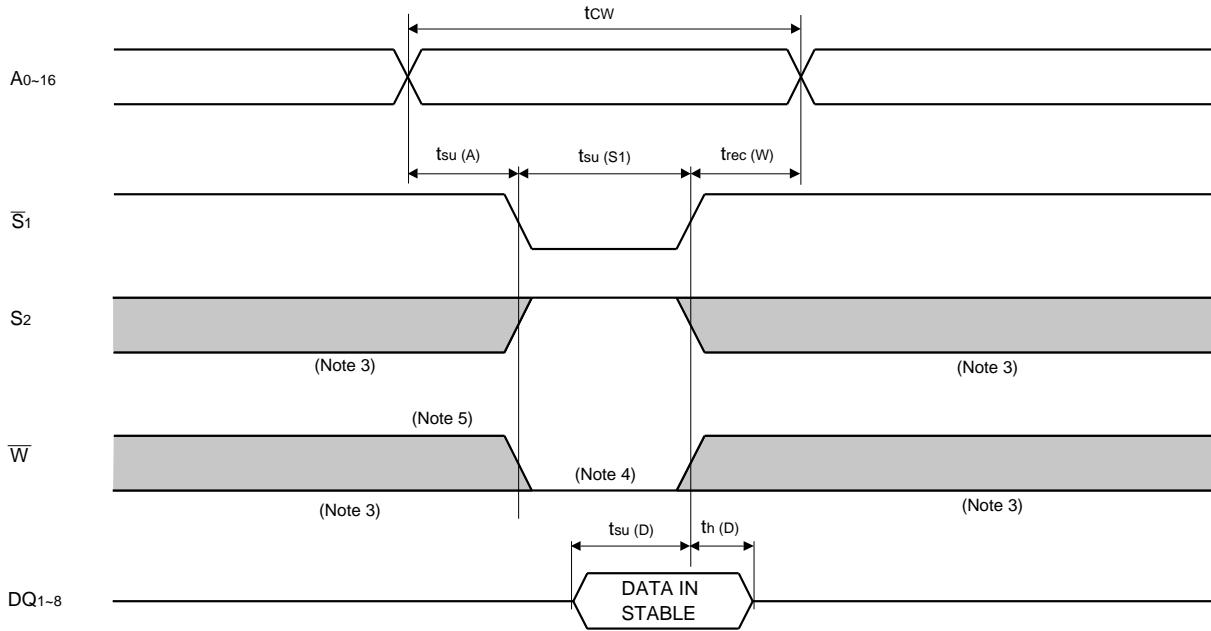
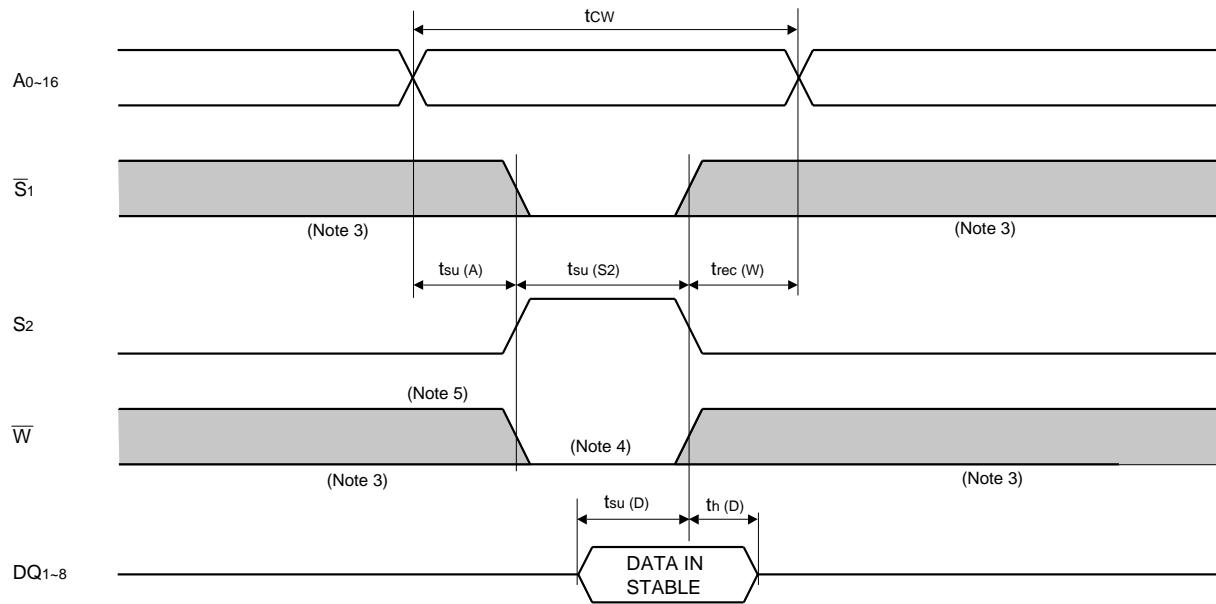
**(4) TIMING DIAGRAMS**

Read cycle

**Write cycle ( $\bar{W}$  control mode)**

**M5M51008BP,FP,VP,RV,KV,KR -55L,-70L,-10L,  
-55LL,-70LL,-10LL**

**1048576-BIT(131072-WORD BY 8-BIT)CMOS STATIC RAM**

**Write cycle ( $\bar{S}_1$  control mode)****Write cycle ( $S_2$  control mode)**

Note 3: Hatching indicates the state is "don't care".

4: Writing is executed while  $S_2$  high overlaps  $\bar{S}_1$  and  $\bar{W}$  low.

5: When the falling edge of  $\bar{W}$  is simultaneously or prior to the falling edge of  $\bar{S}_1$  or rising edge of  $S_2$ , the outputs are maintained in the high impedance state.

6: Don't apply inverted phase signal externally when DQ pin is output mode.

**M5M51008BP,FP,VP,RV,KV,KR -55L,-70L,-10L,  
-55LL,-70LL,-10LL  
1048576-BIT(131072-WORD BY 8-BIT)CMOS STATIC RAM**

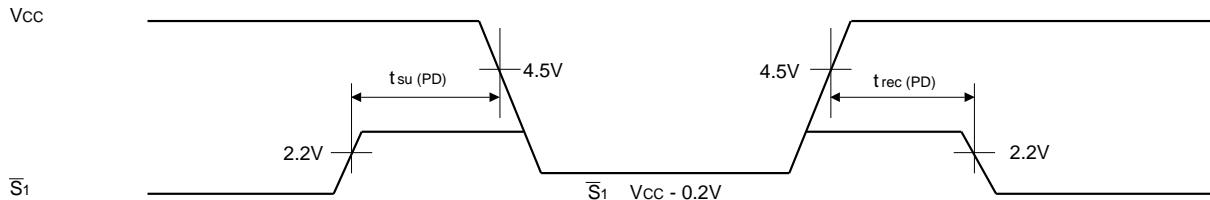
**POWER DOWN CHARACTERISTICS**(1) ELECTRICAL CHARACTERISTICS ( $T_a = 0\text{--}70^\circ\text{C}$ , unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V <sub>CC</sub> (PD)	Power down supply voltage		2			V
V <sub>I</sub> (S <sub>1</sub> )	Chip select input S <sub>1</sub>	2.2V V <sub>CC</sub> (PD)	2.2			V
		2V V <sub>CC</sub> (PD) 2.2V			V <sub>CC</sub> (PD)	
V <sub>I</sub> (S <sub>2</sub> )	Chip select input S <sub>2</sub>	4.5V V <sub>CC</sub> (PD)		0.8		V
		V <sub>CC</sub> (PD) < 4.5V		0.2		
I <sub>CC</sub> (PD)	Power down supply current	V <sub>CC</sub> = 3V 1) S <sub>2</sub> 0.2V, other inputs = 0~3V 2) S <sub>1</sub> V <sub>CC</sub> - 0.2V, S <sub>2</sub> V <sub>CC</sub> - 0.2V other inputs = 0~3V	-L		50	μA
			-LL	0.3	10 (Note 7)	

Note7: I<sub>CC</sub> (PD) = 1μA in case of  $T_a = 25^\circ\text{C}$ (2) TIMING REQUIREMENTS ( $T_a = 0\text{--}70^\circ\text{C}$ , unless otherwise noted )

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
t <sub>su</sub> (PD)	Power down set up time		0			ns
t <sub>rec</sub> (PD)	Power down recovery time		5			ms

## (3) POWER DOWN CHARACTERISTICS

**S<sub>1</sub> control mode****S<sub>2</sub> control mode**