

# Photointerrupters(Transmissive)

KODENSHI

SG - 206

The SG - 206 photointerrupter high - performance standard type, combines high - output GaAs IRED with high sensitive phototransistor.

## FEATURES


- High performance
- High - speed response
- 5mm gap.
- Widely applicable

## APPLICATIONS

- Tape - end sensors
- Timing sensors
- Edge sensors
- Copiers

## DIMENSIONS

(Unit : mm)

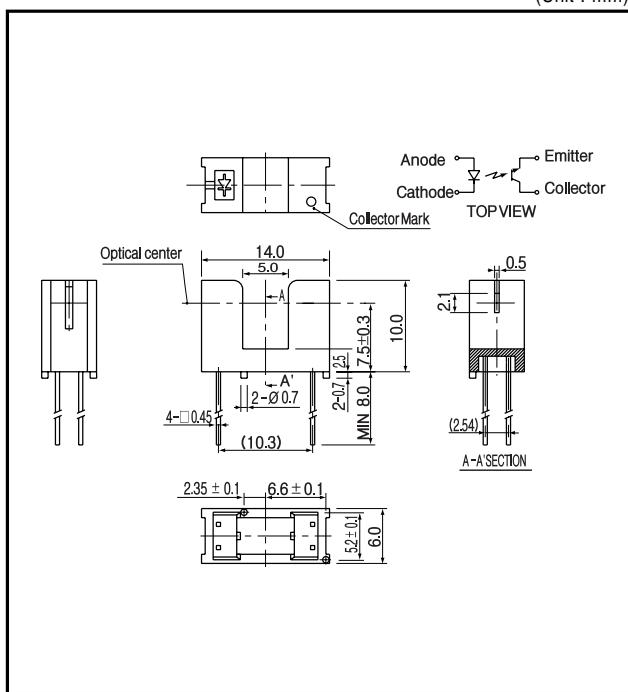

## MAXIMUM RATINGS

(Ta=25 °C)

Item	Symbol	Rating	Unit
Input	P <sub>D</sub>	100	mW
	V <sub>R</sub>	5	V
	I <sub>F</sub>	60	mA
	I <sub>FP</sub>	1	A
Output	P <sub>C</sub>	100	mW
	I <sub>C</sub>	40	mA
	V <sub>C EO</sub>	30	V
	V <sub>E CO</sub>	5	V
Operating temp.	Topr.	-20 ~ +85	
Storage temp.	Tstg.	-30 ~ +85	
Soldering temp. <sup>1</sup>	Tsol.	240	

\*1.t w 100 μsec.period : T=10msec.

\*2. For MAX. 5 seconds at the position of 2mm from the package

## ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 °C)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	V <sub>F</sub>	I <sub>F</sub> =30mA		1.2	1.5	V
	I <sub>R</sub>	V <sub>R</sub> =5V			10	μA
	C <sub>t</sub>	V=0, f=1KHz		25		pF
	λ <sub>p</sub>			940		nm
Output	I <sub>C EO</sub>	V <sub>C EO</sub> =10V			0.1	μA
	I <sub>L</sub>	V <sub>C EO</sub> =5V, I <sub>F</sub> =20mA	0.5			mA
C - E saturation voltage	V <sub>C E(sat)</sub>	I <sub>F</sub> =30mA, I <sub>C</sub> =0.1mA			0.4	V
Switching speeds	Rise time	tr	V <sub>CC</sub> =5V, t <sub>l</sub> =2mA	5		μsec.
	Fall time	t <sub>f</sub>		5		μsec.


## Photo interrupters(Transmissive)

SG - 206


### Collector power dissipation Vs. Ambient temperature

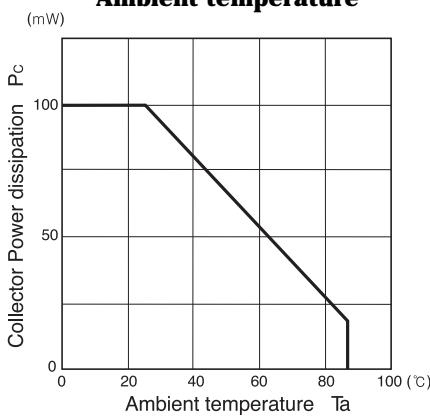


### Forward current Vs. Forward voltage

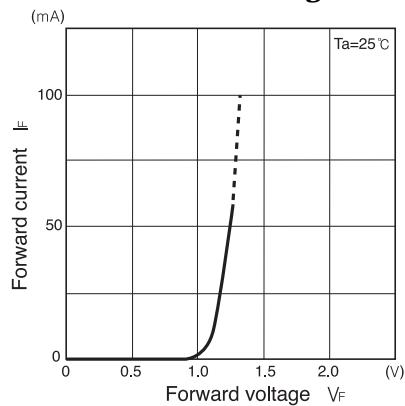


### Light current Vs. Forward current

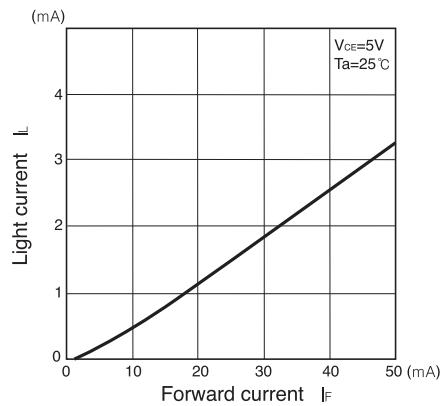


### Light current Vs. Collector-Emitter voltage

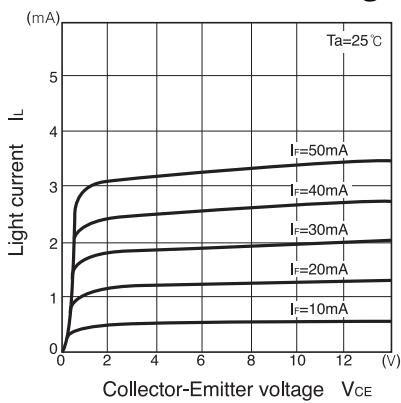


### Relative light current Vs. Ambient temperature

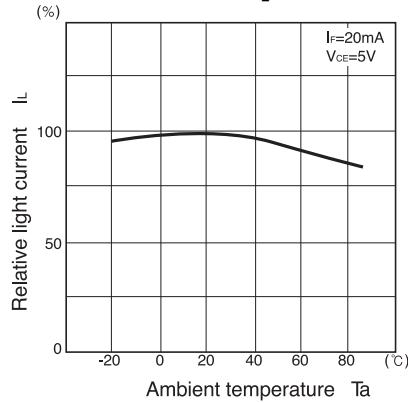


### Dark current Vs. Ambient temperature

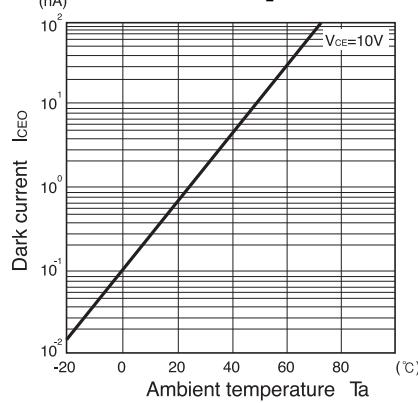


### Switching time Vs. Load resistance

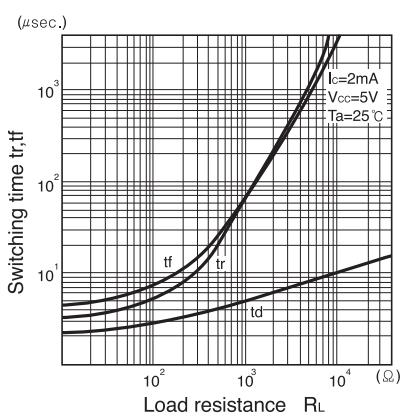

### Relative light current Vs. Moving distance

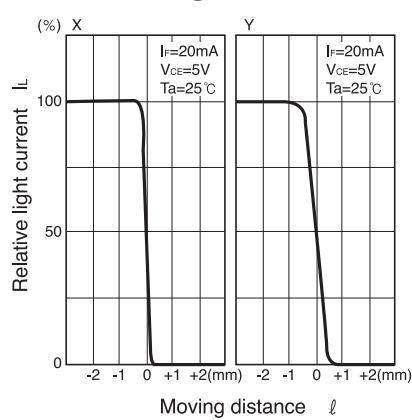

### Switching time measurement circuit

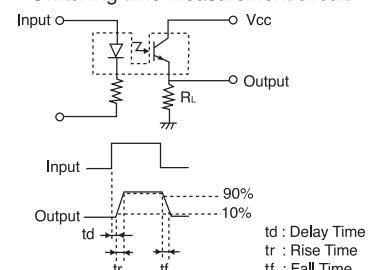

### Method of measuring position characteristic

