

### CMOS TIMER


#### Description

The  $\mu$ PD5555 is a CMOS RC timer providing significantly improved performance over the standard bipolar 555 timer, while at the same time being direct replacement for that device in most applications. Improved parameters include low supply current, wide operating supply voltage range, THRESHOLD, TRIGGER and RESET currents as low as 2 pA, no crowbarring of the power supply during output transitions, higher frequency performance, and no requirement to decouple control voltage for stable operation.

Specifically, the  $\mu$ PD5555 is a stable controller capable of producing accurate time delays or frequencies.

In the one-shot mode, the pulse width of each circuit is precisely controlled by one external resistor and capacitor. For astable operation as an oscillator, the free running frequency and the duty cycle are controlled by two external resistors and one capacitor. The circuits can source or sink current large enough to drive TTL loads or provide minimal offsets to drive CMOS loads.


#### CONNECTION DIAGRAM (Top View)

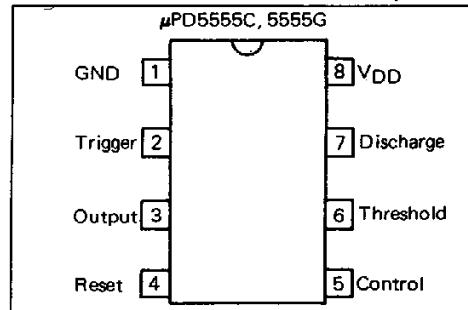

#### Features

- Exact equivalent in most cases for industry standard 555 timer
- Low supply current
- 3 to 16 V operating voltage range
- Timing from microseconds through hours

#### EQUIVALENT CIRCUIT

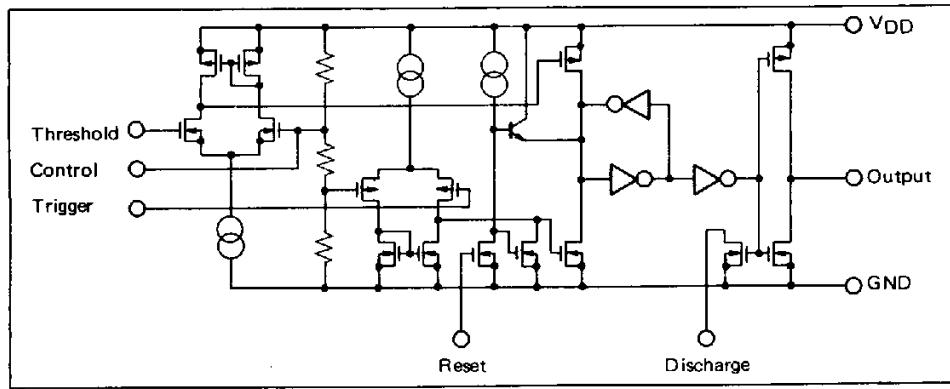

#### ORDERING INFORMATION

| Part Number    | Package                     |
|----------------|-----------------------------|
| $\mu$ PD5555C  | 8 PIN PLASTIC DIP (300 mil) |
| $\mu$ PD5555G2 | 8 PIN PLASTIC SOP (225 mil) |

NEC cannot assume any responsibility for any circuits shown or represent that they are free from patent infringement.

© NEC Corporation 1987

■ 6427525 0070547 180 ■

**ABSOLUTE MAXIMUM RATINGS ( $T_a=25^{\circ}\text{C}$ )**

| PARAMETER   | SYMBOL             | $\mu\text{PD5555}$                               | UNIT               |
|---|--------------------|--|--------------------|
| Supply Voltage  | $V_{DD}$           | 18   | V                  |
| Input Voltage<br>(Trigger, Threshold, Reset, Control) | $V_{IN}$           | $\text{GND} - 0.3 \leq V_{IN} \leq V_{DD} + 0.3$ | V                  |
| Output Current  | $I_O$              | 100  | mA                 |
| Operating Temperature Range                           | $T_{opt}$          | $-20 \sim +70$                                   | $^{\circ}\text{C}$ |
| Storage Temperature Range                             | $T_{stg}$          | $-55 \sim +125$                                  | $^{\circ}\text{C}$ |
| Power Dissipation                                     | C Package (Note 1) | $P_T$  | 350                |
|   | G Package (Note 2) |  | 440                |
|   |                    |  | mW                 |

Note 1: Thermal derating factor is  $-5 \text{ mW}/^{\circ}\text{C}$  when ambient temperature is higher than  $55^{\circ}\text{C}$ .

Note 2: Thermal derating factor is  $-4.4 \text{ mW}/^{\circ}\text{C}$  when ambient temperature is higher than  $25^{\circ}\text{C}$ .


**RECOMMENDED OPERATING CONDITIONS**

| CHARACTERISTIC        | SYMBOL               | MIN. | TYP. | MAX.     | UNIT               |
|-----------------------|----------------------|------|------|----------|--------------------|
| Oscillation Frequency |                      |      |      | 500      | kHz                |
| Supply Voltage        | $V_{DD}$             | 3    |      | 16       | V                  |
| Input Voltage         | $V_{IN}$             | 0    |      | $V_{DD}$ | V                  |
| Output Sink Current   | $I_O \text{ SINK}$   |      |      | 3.2      | mA                 |
| Output Source Current | $I_O \text{ SOURCE}$ |      |      | 1        | mA                 |
| Operating Temperature | $T_{opt}$            | -20  |      | 70       | $^{\circ}\text{C}$ |

ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ ,  $V_{DD}=+3\text{~to~}15\text{ V}$ )


| CHARACTERISTIC                                      | SYMBOL      | MIN.  | TYP.         | MAX. | UNIT                  | CONDITION   |
|---|-------------|-------|--------------|------|-----------------------|---|
| Supply Current                                      | $I_{DD}$    |       | 115          | 250  | $\mu\text{A}$         | $V_{DD}=5\text{ V}$   |
|   |             |       | 150          | 350  |                       | $V_{DD}=15\text{ V}$  |
| Threshold Voltage                                   | $V_{th}$    |       | $2/3 V_{DD}$ |      | V                     |   |
| Threshold Current                                   | $I_{th}$    |       | 50           |      | $\text{pA}$           | $V_{DD}=15\text{ V}$  |
|   |             |       | 10           |      |                       | $V_{DD}=5\text{ V}$   |
|   |             |       | 1            |      |                       | $V_{DD}=3\text{ V}$   |
| Trigger Voltage                                     | $V_{tr}$    |       | $1/3 V_{DD}$ |      | V                     |   |
| Trigger Current                                     | $I_{tr}$    |       | 50           |      | $\text{pA}$           | $V_{DD}=15\text{ V}$  |
|   |             |       | 10           |      |                       | $V_{DD}=5\text{ V}$   |
|   |             |       | 1            |      |                       | $V_{DD}=3\text{ V}$   |
| Reset Voltage<br>( $V_O$ becomes low)               | $V_{reset}$ | 0.6   | 1.1          | 2.0  | V                     | $V_{DD}=15\text{ V}$  |
|   |             | 0.6   | 1.1          | 2.0  |                       | $V_{DD}=3\text{ V}$   |
| Reset Current                                       | $I_{reset}$ |       | 100          |      | $\text{pA}$           | $V_{RESET}=\text{GND}, V_{DD}=15\text{ V}$  |
|   |             |       | 20           |      |                       | $V_{RESET}=\text{GND}, V_{DD}=5\text{ V}$   |
|   |             |       | 2            |      |                       | $V_{RESET}=\text{GND}, V_{DD}=3\text{ V}$   |
| Output Low Voltage                                  | $V_{OL}$    |       | 0.06         | 0.4  | V                     | $V_{DD}=15\text{ V}, I_{SINK}=3.2\text{ mA}$  |
|   |             |       | 0.14         | 0.4  |                       | $V_{DD}=5\text{ V}, I_{SINK}=3.2\text{ mA}$   |
| Output High Voltage                                 | $V_{OH}$    | 14.25 | 14.85        |      | V                     | $V_{DD}=15\text{ V}, I_{SOURCE}=1\text{ mA}$  |
|   |             | 4.0   | 4.7          |      |                       | $V_{DD}=5\text{ V}, I_{SOURCE}=1\text{ mA}$   |
| Output Rise Time                                    | $t_{rise}$  |       | 40           |      | ns                    | $R_L=10\text{ M}\Omega, C_L=7\text{ pF}, V_{DD}=5\text{ V}$   |
| Output Fall Time                                    | $t_{fall}$  |       | 40           |      | ns                    | $R_L=10\text{ M}\Omega, C_L=7\text{ pF}, V_{DD}=5\text{ V}$   |
| Max. Oscillation Frequency                          |             | 500   |              |      | kHz                   | Astable Operation   |
| Propagation Delay                                   | $t_{pd}$    |       | 350          |      | ns                    | Monostable Operation<br>Trigger Level = 0.1 : $V_{DD}$  |
| Minimum Trigger Pulse Width ( $V_{DD}=5\text{ V}$ ) | $t_{tr}$    |       | 160          |      | ns                    | Trigger Level = 0.1 · $V_{DD}$  |
| Control Voltage                                     | $V_{cont}$  |       | $2/3 V_{DD}$ |      | V                     |   |
| Timing Error<br>Initial Accuracy                    |             |       | 2            |      | %                     | $R_1, R_2=1\text{ k}\Omega\sim100\text{ k}\Omega$<br>$C=0.1\text{ }\mu\text{F}$<br>$V_{DD}=5\text{~to~}15\text{ V}$ |
| Temperature Drift                                   |             |       | 50           |      | ppm/ $^\circ\text{C}$ |   |
| Supply Voltage Drift                                |             |       | 1            |      | %/V                   |   |

Note 1: To reduce transient switching noise on the supply voltage line, install a bypass capacitor from  $V_{DD}$  to ground. Connect the capacitor, with value listed below, close to  $V_{DD}$ .



Capacitance       $C \geq 0.047\text{ }\mu\text{F} \quad V_{DD} \leq 10\text{ V}$   
 $C \geq 0.1\text{ }\mu\text{F} \quad V_{DD} > 10\text{ V}$


Note 2: Install a series resistor ( $R \geq 4.7\text{ k}\Omega$ ) to Reset, when reset is controlled by digital devices.

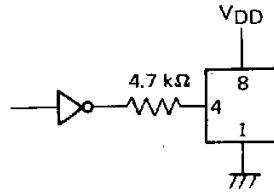


■ 6427525 0070549 T53 ■

TYPICAL PERFORMANCE CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )


SUPPLY CURRENT

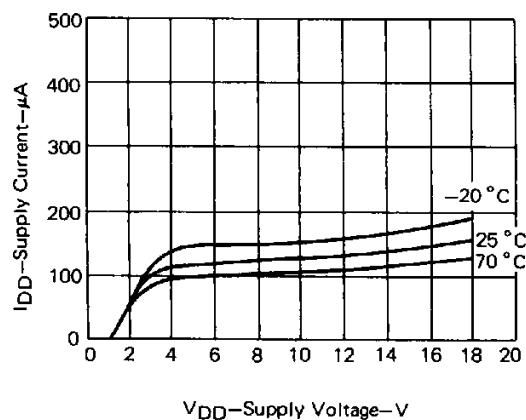


OUTPUT SINK CURRENT

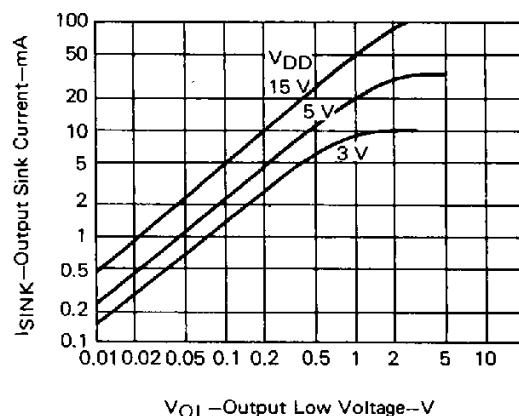



OUTPUT SOURCE CURRENT

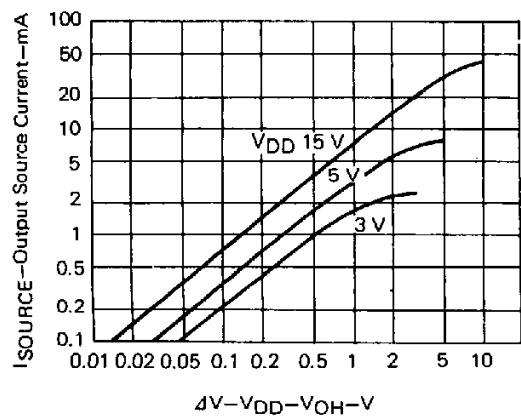

DISCHARGE CURRENT

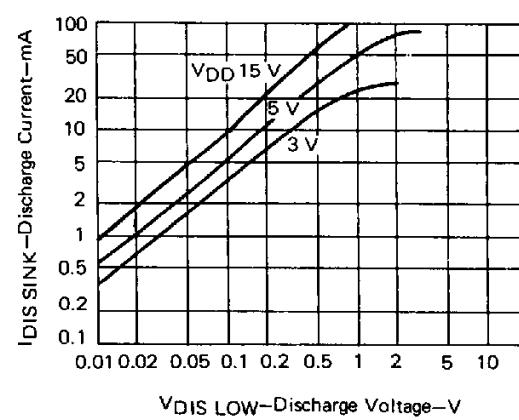


OUTPUT LOW VOLTAGE

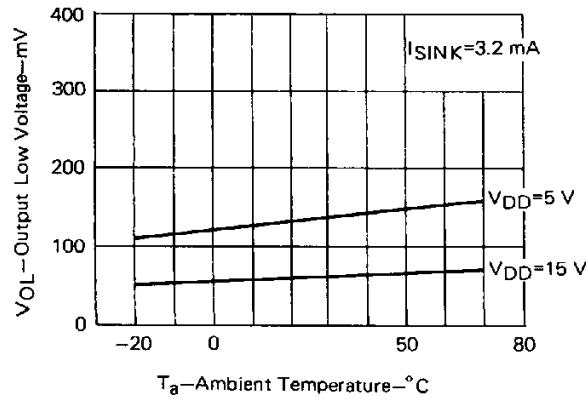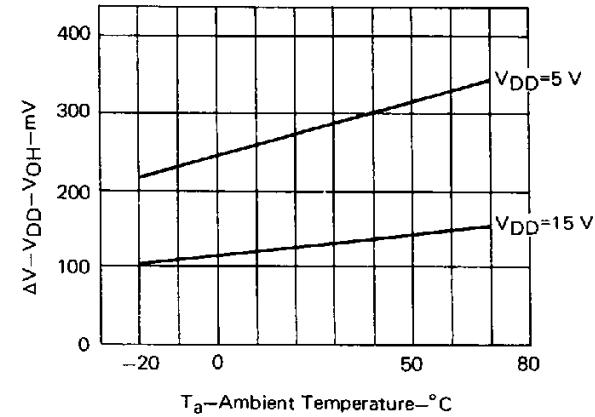
 $V_{DD}$ -OUTPUT HIGH VOLTAGE

■ 6427525 0070550 775 ■


## DISCHARGE VOLTAGE

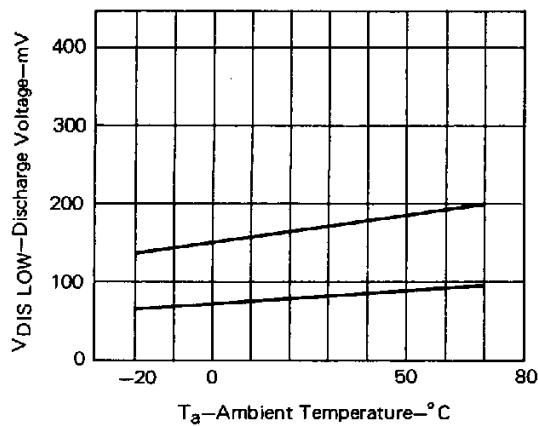


## DYNAMIC CURRENT

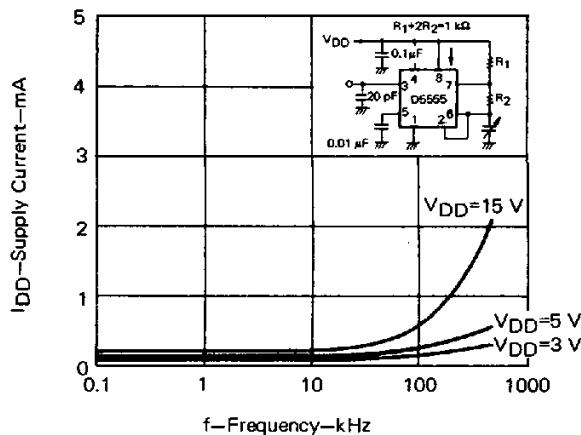


## PROPAGATION DELAY

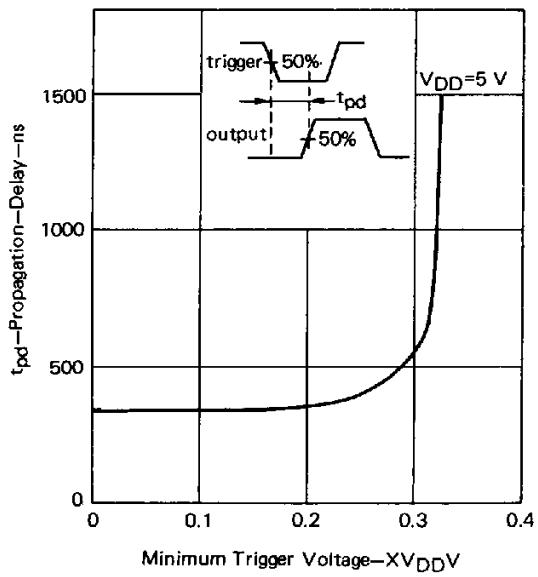


## MINIMUM TRIGGER PULSE WIDTH

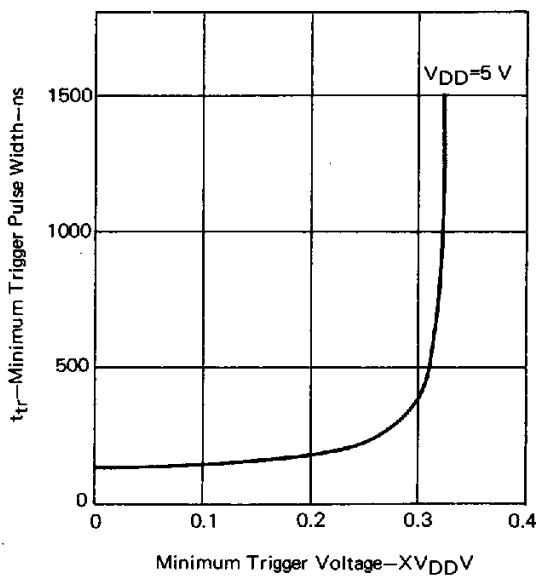

## PROPAGATION DELAY

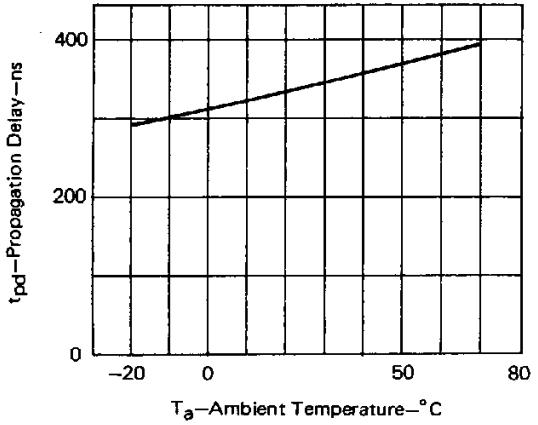


## MINIMUM TRIGGER PULSE WIDTH

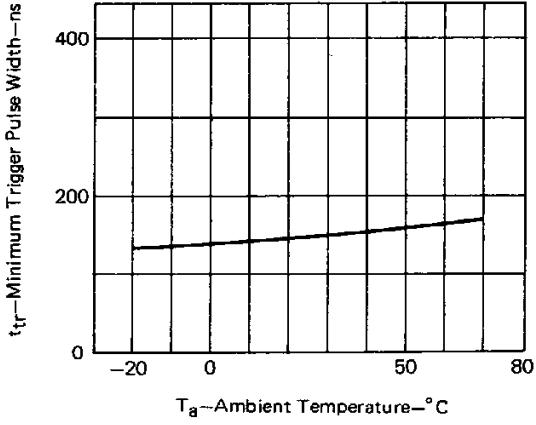


■ 6427525 0070551 601 ■

## FREE RUNNING FREQUENCY

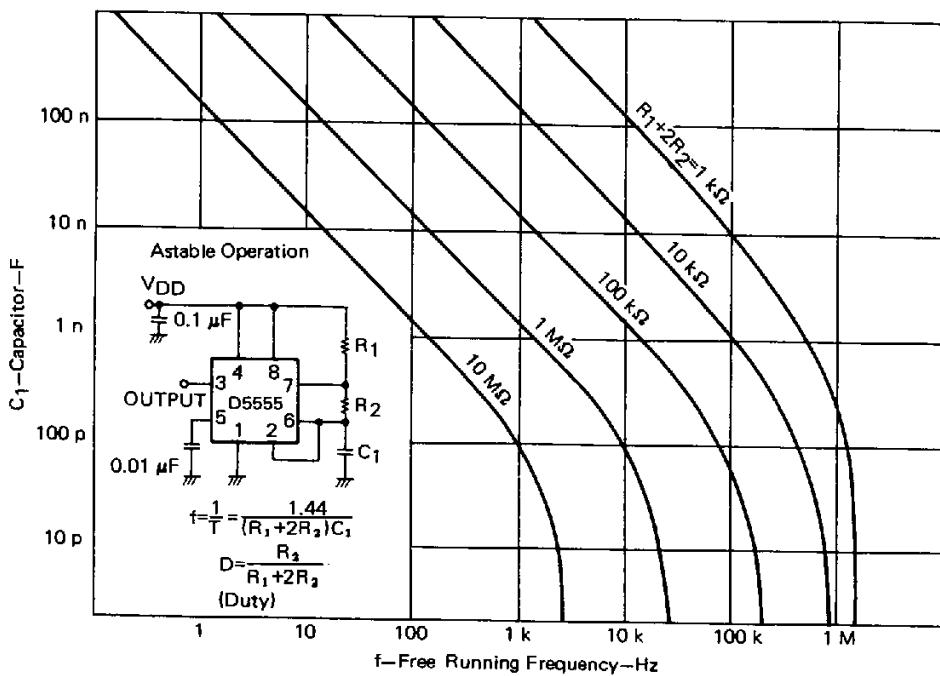


## TIME DELAY

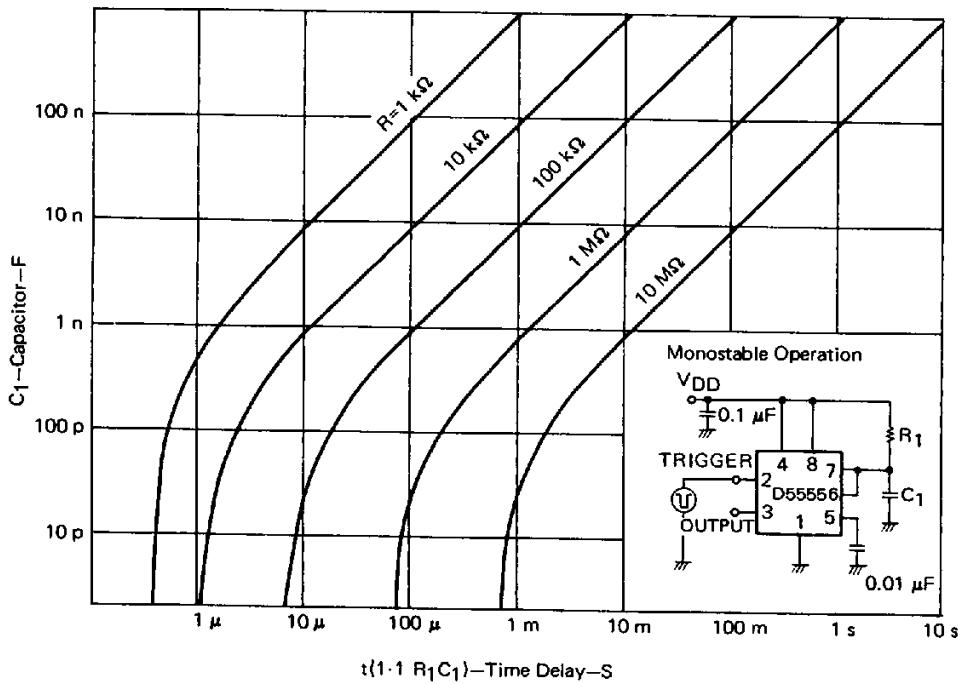

■ 6427525 0070552 548 ■

## 8PIN PLASTIC DIP (300 mil)

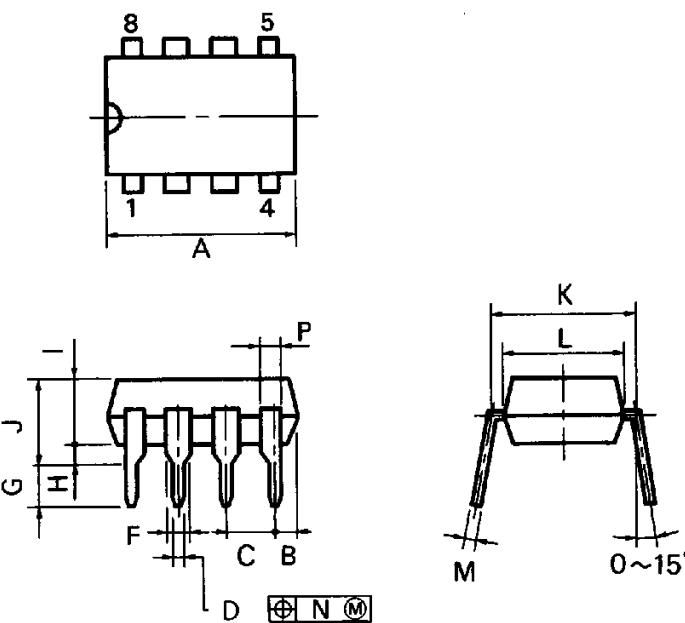

P8C-100-300B,C




## NOTES

- 1) Each lead centerline is located within 0.25 mm (0.01 inch) of its true position (T.P.) at maximum material condition.
- 2) Item "K" to center of leads when formed parallel.

| ITEM | MILLIMETERS            | INCHES                    |
|------|------------------------|---------------------------|
| A    | 10.16 MAX.             | 0.400 MAX.                |
| B    | 1.27 MAX.              | 0.050 MAX.                |
| C    | 2.54 (T.P.)            | 0.100 (T.P.)              |
| D    | $0.50^{+0.10}$         | $0.020^{+0.004}_{-0.003}$ |
| F    | 1.4 MIN.               | 0.055 MIN.                |
| G    | $3.2^{+0.3}$           | $0.126^{+0.012}$          |
| H    | 0.51 MIN.              | 0.020 MIN.                |
| I    | 4.31 MAX.              | 0.170 MAX.                |
| J    | 5.08 MAX.              | 0.200 MAX.                |
| K    | 7.62 (T.P.)            | 0.300 (T.P.)              |
| L    | 6.4                    | 0.252                     |
| M    | $0.25^{+0.10}_{-0.05}$ | $0.010^{+0.004}_{-0.003}$ |
| N    | 0.25                   | 0.01                      |
| P    | 0.9 MIN.               | 0.035 MIN.                |

■ 6427525 0070553 484 ■

## 8PIN PLASTIC SOP (225 mil)

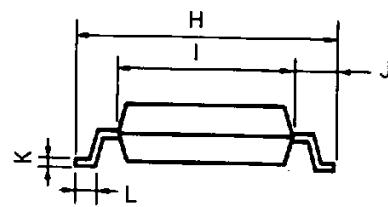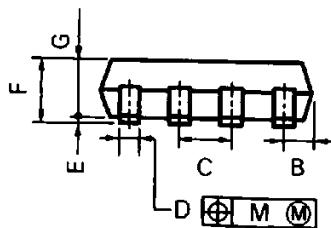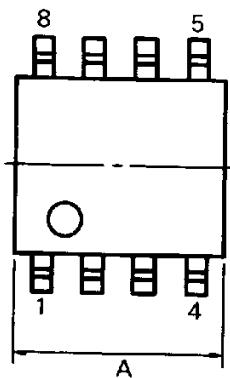

S8GM-50-225B

**NOTE**

Each lead centerline is located within 0.12 mm (0.005 inch) of its true position (T.P.) at maximum material condition.

| ITEM | MILLIMETERS            | INCHES                    |
|------|------------------------|---------------------------|
| A    | 5.70 MAX.              | 0.225 MAX.                |
| B    | 0.94 MAX.              | 0.037 MAX.                |
| C    | 1.27 (T.P.)            | 0.050 (T.P.)              |
| D    | $0.40^{+0.10}_{-0.05}$ | $0.016^{+0.004}_{-0.003}$ |
| E    | $0.1^{+0.1}_{-0.05}$   | $0.004^{+0.004}_{-0.003}$ |
| F    | 1.8 MAX.               | 0.071 MAX.                |
| G    | 1.49                   | 0.059                     |
| H    | $6.5^{+0.3}_{-0.2}$    | $0.256^{+0.012}_{-0.008}$ |
| I    | 4.4                    | 0.173                     |
| J    | 1.1                    | 0.043                     |
| K    | $0.15^{+0.10}_{-0.05}$ | $0.006^{+0.004}_{-0.002}$ |
| L    | $0.6^{+0.2}_{-0.1}$    | $0.024^{+0.008}_{-0.005}$ |
| M    | 0.12                   | 0.005                     |

IC-1994  
May 1987P  
Printed in Japan

■ 6427525 0070554 310 ■