# PH SERIES Single Output, DC/DC Converter 50W-600W



#### Features

Conduction cooling

High efciency

High power density: 61.6W/inch<sup>3</sup> (600W type)

Full-function model (F type)

N+1 parallel redundancy operation

Current sharing (load current balance)

IOG (inverter operation monitoring signal)

AUX (AUX-BIAS power output)


Internal capacitor

PH50-150/300F: Aluminum electrolytic (output smooth-

ing), ceramic

PH300S/PH600S: Ceramic capacitor only (high reliability)

#### Model naming method



#### Applications











#### ■ Product Line up

Please see the following page.

#### Conformity to RoHS Directive

This means that, in conformity with EU Directive 2002/95/ EC, lead, cadmium, mercury, hexavalent chromium, and specifc bromine-based fame retardants, PBB and PBDE, have not been used, except for exempted applications.

#### Produce Line up

24V input

Output		50W		100W		300W
Output Voltage	Output Current	Model (S)	Output Current	Model (F)	Output Current	Model (F)
2V			20A	PH100F24-2		
3V			20A	PH100F24-3		
3.3V	10A	PH50S24-3.3				
5V	10A	PH50S24-5	20A	PH100F24-5		
12V	4.2A	PH50S24-12	8.4A	PH100F24-12	20A	PH300F24-12
15V	3.4A	PH50S24-15	6.7A	PH100F24-15		
24V	2.1A	PH50S24-24	4.2A	PH100F24-24		
28V	1.8A	PH50S24-28	3.6A	PH100F24-28	10.8A	PH300F24-28

48V input (1)

Output		50W		75W
Output Voltage	Output Current	Model (S)	Output Current	Model (F)
2V			15A	PH75F48-2
3.3V	10A	PH50S48-3.3	15A	PH75F48-3.3
5V	10A	PH50S48-5	15A	PH75F48-5
12V	4.2A	PH50S48-12	6.3A	PH75F48-12
15V	3.4A	PH50S48-15	5A	PH75F48-15
24V	2.1A	PH50S48-24	3.2A	PH75F48-24
28V	1.8A	PH50S48-28	2.7A	PH75F48-28
48V				

48V input (2)

40 1111	(2)	75W		100W		150W		300W				
Output Voltage	Output Current	Model (S)	Output Current	Model (S)	Output Current	Model (F)	Model (S)	Output Current	Model (F)	Output Current	Model (S)	
2V	15A				30A	PH150F48-2		60A	PH300F48-2			
3.3V	15A	PH75S48-3.3	20A	PH100S48-3.3	30A	PH150F48-3.3	PH150S48-3.3	60A	PH300F48-3	50A	PH300S48-3.3	
5V	15A	PH75S48-5	20A	PH100S48-5	30A	PH150F48-5	PH150S48-5	60A	PH300F48-5	50A	PH300S48-5	
12V	6.3A	PH75S48-12	8.4A	PH100S48-12	12.5A	PH150F48-12	PH150S48-12	25A	PH300F48-12	25A	PH300S48-12	
15V	5A	PH75S48-15	6.7A	PH100S48-15	10A	PH150F48-15	PH150S48-15	20A	PH300F48-15	20A	PH300S48-15	
24V	3.2A	PH75S48-24	4.2A	PH100S48-24	6.3A	PH150F48-24	PH150S48-24	12.6A	PH300F48-24	12.6A	PH300S48-24	
28V	2.7A	PH75S48-28	3.6A	PH100S48-28	5.4A	PH150F48-28	PH150S48-28	10.8A	PH300F48-28	10.8A	PH300S48-28	
48V										6.3A	PH300S48-48	

110V input

110 / 11	iput										
Output		50W		75W			150W		300W		
Output Voltage			Output Current	Model (F)	Model (S)	Output Current	Model (F)	Model (S)	Output Current	Model (F)	
2V			15A	PH75F110-2		30A	PH150F110-2		60A	PH300F110-2	
3V			15A	PH75F110-3		30A	PH150F110-3		60A	PH300F110-3	
3.3V											
5V	10A	PH50S110-5	15A	PH75F110-5	PH75S110-5	30A	PH150F110-5	PH150S110-5	60A	PH300S110-5	
12V	4.2A	PH50S110-12	6.3A	PH75F110-12	PH75S110-12	12.5A	PH150F110-12	PH150S110-12	25A	PH300S110-12	
15V	3.4A	PH50S110-15	5A	PH75F110-15	PH75S110-15	10A	PH150F110-15	PH150S110-15	20A	PH300S110-15	
24V	2.1A	PH50S110-24	3.2A	PH75F110-24	PH75S110-24	6.3A	PH150F110-24	PH150S110-24	12.6A	PH300S110-24	
28V	1.8A	PH50S110-28	2.7A	PH75F110-28	PH75S110-28	5.4A	PH150F110-28	PH150S110-28	10.8A	PH300S110-28	

280V input (1)

200 1	iput (1)										
Output		50W		75W			100W	150W			
Output Voltage	Output Current	Model (S)	Output Current	Model (F)	Model (S)	Output Current			Model (F)	Model (S)	
2V			15A	PH75F280-2				30A	PH150F280-2		
3V			15A	PH75F280-3				30A	PH150F280-3		
3.3V	10A	PH50S280-3.3	15A		PH75S280-3.3	20A	PH100S280-3.3	30A		PH150S280-3.3	
5V	10A	PH50S280-5	15A	PH75F280-5	PH75S280-5	20A	PH100S280-5	30A	PH150F280-5	PH150S280-5	
12V	4.2A	PH50S280-12	6.3A	PH75F280-12	PH75S280-12	8.4A	PH100S280-12	12.5A	PH150F280-12	PH150S280-12	
15V	3.4A	PH50S280-15	5A	PH75F280-15	PH75S280-15	6.7A	PH100S280-15	10A	PH150F280-15	PH150S280-15	
24V	2.1A	PH50S280-24	3.2A	PH75F280-24	PH75S280-24	4.2A	PH100S280-24	6.3A	PH150F280-24	PH150S280-24	
28V	1.8A	PH50S280-28	2.7A	PH75F280-28	PH75S280-28	3.6A	PH100S280-28	5.4A	PH150F280-28	PH150S280-28	
48V											


280V input (2)

	.put (2)		W00			600W
Output Voltage	Output Current	Model (F)	Output Current	Model (S)	Output Current	Model (S)
2V	60A	PH300F280-2				
3V	60A	PH300F280-3				
3.3V			50A	PH300S280-3.3	100A	PH600S280-3.3
5V	60A	PH300F280-5	50A	PH300S280-5	100A	PH600S280-5
12V	25A	PH300F280-12	25A	PH300S280-12	50A	PH600S280-12
15V	20A	PH300F280-15	20A	PH300S280-15	40A	PH600S280-15
24V	12.6A	PH300F280-24	12.5A	PH300S280-24	25A	PH600S280-24
28V	10.8A	PH300F280-28	10.8A	PH300S280-28	21.5A	PH600S280-28
48V			6.3A	PH300S280-280	12.5A	PH600S280-48

### PH50S24 Specifications

Maximum Power       W       33       50       50.4       51       50.4         Voltage Setting Accuracy (*1)       %       ±1         Output       Maximum Line Regulation (*2)       mV       20       48       60       96         Maximum Load Regulation (*3)       mV       40       96       120       192         Temperature Coefficient       0.02%/         Maximum Ripple & Noise (*9)       mVp-p       100       150       240	28 1.8								
Efficiency (typ)	1.8								
Current (typ) (*1) A 1.91 2.6 2.59 2.53  Nominal Voltage VDC 3.3 5 12 15 24  Maximum Current A 10 4.2 3.4 2.1  Maximum Power W 33 50 50.4 51 50.4  Voltage Setting Accuracy (*1) % ±1  Output Maximum Line Regulation (*2) mV 20 48 60 96  Maximum Load Regulation (*3) mV 40 96 120 192  Temperature Coefficient 0.02%/  Maximum Ripple & Noise (*9) mVp-p 100 150 240	1.8								
Nominal Voltage	1.8								
Maximum Current         A         10         4.2         3.4         2.1           Maximum Power         W         33         50         50.4         51         50.4           Voltage Setting Accuracy (*1)         %         ±1         ***         ***         ***           Output         Maximum Line Regulation (*2)         mV         20         48         60         96           Maximum Load Regulation (*3)         mV         40         96         120         192           Temperature Coefficient         0.02%/           Maximum Ripple & Noise (*9)         mVp-p         100         150         240	1.8								
Maximum Power         W         33         50         50.4         51         50.4           Voltage Setting Accuracy (*1)         %         ±1           Output         Maximum Line Regulation (*2)         mV         20         48         60         96           Maximum Load Regulation (*3)         mV         40         96         120         192           Temperature Coefficient         0.02%/           Maximum Ripple & Noise (*9)         mVp-p         100         150         240									
Voltage Setting Accuracy (*1)       %       ±1         Output       Maximum Line Regulation (*2)       mV       20       48       60       96         Maximum Load Regulation (*3)       mV       40       96       120       192       3         Temperature Coefficient       0.02%/         Maximum Ripple & Noise (*9)       mVp-p       100       150       240       3									
Output         Maximum Line Regulation (*2)         mV         20         48         60         96           Maximum Load Regulation (*3)         mV         40         96         120         192           Temperature Coefficient         0.02%/           Maximum Ripple & Noise (*9)         mVp-p         100         150         240									
Maximum Load Regulation(*3)         mV         40         96         120         192           Temperature Coefficient         0.02%/           Maximum Ripple & Noise (*9)         mVp-p         100         150         240									
Temperature Coefficient         0.02%/           Maximum Ripple & Noise (*9) mVp-p         100         150         240	112								
Maximum Ripple & Noise (*9) mVp-p 100 150 240	224								
	280								
Voltage Adjustable Range(*8) +10%, -10% (At 24VDC input)									
Over Current Protection (*4) 105 - 150%									
	65 - 240% 125 - 145%								
Remote Sensing Function									
Remote ON/OFF Control (*8) Possible (SHORT: ON OPEN: OFF)									
Parallel Operation									
Series Operation (*8) Possible									
Operating Temperature (*6) -20 to +85 (Baseplate) Ambient temperature min=-20									
Storage Temperature -40 to +85									
Operating Humidity									
Storage Humidity									
Vibration At no operating, 10-55Hz amplitude (sweep for 1min)									
0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each									
Shock 196.1m/s² (In package)									
Cooling (*7) Conduction cooled									
Withstand Voltage Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC (20mA) for 1min,									
Output-Baseplate : 500VDC for 1min									
Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC	More than 100M at 25 and 70%RH Output-Baseplate500VDC								
Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1	and the state of t								
Mechanical Weight (typ) g 100									
Size (W x H x D) mm 41 x 12.7 x 86 (Refer to outline drawing)									


- (\*1) At 24VDC and maximum output current.
- (\*2) 18 36 VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)



## PH100F24 Specifications

		MO	DEL									
ITEMS/UNITS		IVIO	DEL	PH100F24-2	PH100F24-3	PH100F24-5	PH100F24-12	PH100F24-15	PH100F24-24	PH100F24-28		
Voltage	Range		V				DC18 - 36					
Input Efficience	y (typ)	(*1)	%	66	70	80	81	82	8	3		
Current	(typ)	(*1)	Α	2.53	3.57	5.21	5.19	5.11	5.0	06		
Nominal	Voltage		VDC	2	3	5	12	15	24	28		
Maximu	n Current		Α		20		8.4	6.7	4.2	3.6		
Maximu	n Power		W	40	60	100	100.8	100.5	100	0.8		
Voltage	Setting Accuracy	(*1)	%				± 1%					
Output Maximui	n Line Regulation	1(*2)	mV		20		48	60	96	112		
Maximur	n Load Regulation	n(*3)	mV		40		96	120	192	224		
Tempera	ture Coefficient						0.02% /					
Maximu	n Ripple & Noise	(*9)	mVp-p		100		15	50	240	280		
								+20%, -60%	)			
Over Cu	Over Current Protection (*4) 105% - 140%											
Over Vo	tage Protection	(*5)		165% -	165% - 240%							
Remote	Sensing	(*8)			Possible							
Function Remote	(*8)			Possible (SHORT: ON OPEN: OFF)								
Parallel	Parallel Operation (*				Possible							
Series C	peration	(*8)					Possible					
I.O.G. Si	gnal	(*8)				Possible	(Open collec	tor output)				
Operatir	g Temperature	(*6)			- 20 to + 8	35 (Baseplat	e) ambient te	emperature N	/IN = - 20			
Storage	Temperature						- 40 to + 85					
Operatin	g Humidity		%RH			30 -	95 (No dewo	drop)				
Environment Storage	Humidity		%RH			10 -	95 (No dewo	drop)				
Vibration	ı			Am	At 1911pppppppppppppppppppppppppppppppppp	no operating 5mm consta	g, 10-55Hz (s nt (maximum	sweep for 1m n 49.0m/s²)	iin) X, Y, Z 1h ea	ach		
Shock						196.1	m/s² (In pac	kage)				
Cooling (*7) Con							nduction cod	oled				
Isolation Withstar	Input-Baseplate : 2kVAC, Input-Output : 2kVAC (20mA) for 1min Output-Baseplate : 500VDC (100mA) for 1min											
Isolation	Resistance			More	More than 100Mohm at 25 and 70%RH Output-Baseplate500VDC							
Standards Safety S	tandards			,	Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1							
Weight (	typ)		g				180					
Mechanical Mechanical	Weight (typ)         g         180           Size (W x H x D)         mm         83 x 12.7 x 86 (Refer to outline drawing)								g)			

- (\*1) At 24VDC and maximum output current.
- (\*2) 18 36VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basical connection and instruction manual.)
- (\*10) At 24VDC input.(Refer to instruction manual.)




### PH300F24 Specifications

ITEMS	G/UNITS MO	DEL	PH300F24-12	PH300F24-28
TTENIO	Voltage Range	V	DC18	3 - 36
Input	Efficiency (typ) (*1)	-	83	84
mpat	Current (typ) (*1)		12	15
	Nominal Voltage	VDC	12	28
	Maximum Current	A	20	10.8
	Maximum Power	W	240	302.4
	Voltage Setting Accuracy (*1)		±	
Output	Maximum Line Regulation (*2)		48	112
Output	Maximum Load Regulation(*3)	_	96	224
	Temperature Coefficient	1110	0.029	
	Maximum Ripple & Noise (*9)	m\/n-n		280
	Voltage Adjustable Range(*10)		+20%,	
	Over Current Protection (*4)	_	105% -	
	Over Voltage Protection (*5)		125% -	
	Remote Sensing (*8)		Poss	
	Remote ON/OFF Control (*8)		Possible (SHORT:	
Function	Parallel Operation (*8)		Poss	<u> </u>
	Series Operation (*8)		Poss	
	I.O.G. Signal (*8)	_	Possible (Open	
	AUX-BIAS Power Supply		7 - 10V, 10	· · ·
	Operating Temperature (*6)		-20 to +85 (Baseplate) Amb	
	Storage Temperature		-40 to	<u>'</u>
	Operating Humidity	%RH	30 - 95 (No	dewdrop)
	Storage Humidity	%RH	10 - 95 (No	o dewdrop)
Environment			At no operating, 10-5	5Hz (sweep for 1min)
	Vibration		Amplitude 0.825mm constant (max	, ,
	Shock		196.1m/s² (I	n package)
	Cooling (*7)		Conduction	on cooled
	1100		Input-Baseplate : 2kVAC, Input-	Output : 2kVAC(20mA) for 1min
Isolation	Withstand Voltage		Output-Baseplate :	500VDC for 1min
	Isolation Resistance		More than 100M at 25 and 70°	%RH Output-Baseplate500VDC
Standards	Safety Standards		Approved by UL60950-1, CSA (	C22.2 No.60950-1, EN60950-1
	Weight (typ)	g	25	50
Mechanical	vveigni (typ)	9 1		.0

<sup>(\*1)</sup> At 24VDC and maximum output current.

- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)
- (\*10) At 24VDC Input. (Refer to instruction manual.)



<sup>(\*2)18 - 36</sup>VDC, constant load.

<sup>(\*3)</sup> No load - full load, constant input voltage.

<sup>(\*4)</sup> Constant current limiting with automatic recovery.


<sup>(\*5)</sup> Inverter shutdown method, manual reset.

<sup>(\*6)</sup> Ratings - Refer to derating curve below.

<sup>-</sup> Load(%) is percent of maximum output current.

ITEMS	/UNITS MC	DEL	PH50S48-3.3	PH50S48-5	PH50S48-12	PH50S48-15	PH50S48-24	PH50S48-28				
	Voltage Range	V			DC36	6 - 76						
Input	Efficiency (typ) (*1)	%	72	80	82	83	8	4				
	Current (typ) (*1)	Α	0.95	1.30	1.:	28	1.3	25				
	Nominal Voltage	VDC	3.3	5	12	15	24	28				
	Maximum Current	Α	1	0	4.2	3.4	2.1	1.8				
	Maximum Power	W	33	50	50.4	51	50	0.4				
	Voltage Setting Accuracy (*1)	%			±	: 1						
Output	Maximum Line Regulation (*2)	mV	2	0	48	60	96	112				
	Maximum Load Regulation (*3)	mV	4	0	96	120	192	224				
	Temperature Coefficient				0.02	%/						
	Maximum Ripple & Noise (*9)	mVp-p	10	00	15	50	240	280				
Voltage Adjustable Range(*8) +10%, -10% (At 48VDC Input)												
	Over Current Protection (*4) 105 - 150%											
	Over Voltage Protection (*5)		165 - 240%			125 - 145%						
Function	Remote Sensing											
Function	Remote Sensing Possible (SHORT: ON OPEN: OFF)											
	Parallel Operation											
	Series Operation (*8)				Pos	sible						
	Operating Temperature (*6)			-20 to +85 (I	Baseplate) Am	bient temperat	ure min=-20					
	Storage Temperature				-40 to	+ 85						
	Operating Humidity	%RH			30 - 95 (No	o dewdrop)						
Environment	Storage Humidity	%RH			10 - 95 (No	o dewdrop)						
	Vibration			0.825mm cons	stant (maximur	m 49.0m/s²) ን	Y, Z 1h each					
	Shock				196.1m/s² (	In package)						
	Cooling (*7)				Conduction	on cooled						
Isolation	Withstand Voltage		Inpu	Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC (20mA) for 1min, Output-Baseplate: 500VDC for 1min								
	Isolation Resistance		More	More than 100M at 25 and 70%RH Output-Baseplate500VDC								
Standards	Safety Standards		Ap	Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1								
Machanizz	Weight (typ)	g			10	00						
Mechanical	Size (W x H x D)	mm		41 x 1	2.7 x 86 (Refe	r to outline dra	wing)					


- (\*1) At 48VDC and maximum output current.
- (\*2) 36 76 VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.
- $(\ensuremath{^*7})$  Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)



## **PH75S48 Specifications**

	MC	DEL	PH75S48-3 3	PH75S48-5	PH75S48-12	PH75S48-15	PH75S48-24	PH75S48-28			
ITEMS	/UNITS	_	1117 00 40 0.0	1117 30 40 3			1117 00 40 24	11170040 20			
	Voltage Range	V			DC36	6 - 76					
Input	Efficiency (typ) (*1)	%	72	81	83	84	8	5			
	Current (typ) (*1)	Α	1.43	1.93	1.9	1.86	1.88	1.85			
	Nominal Voltage	VDC	3.3	5	12	15	24	28			
	Maximum Current	Α	1	5	6.3	5	3.2	2.7			
	Maximum Power	W	49.5	75	75.6	75	76.8	75.6			
	Voltage Setting Accuracy (*1)	%			±	1					
Output	Maximum Line Regulation (*2)	mV	2	0	48	60	96	112			
	Maximum Load Regulation (*3)	mV	4	.0	96	120	192	224			
	Temperature Coefficient				0.029	%/					
	Maximum Ripple & Noise (*9)	mVp-p	10	00	15	50	240	280			
	Voltage Adjustable Range(*8)			+10%, -10% (At 48VDC Input)							
	Over Current Protection (*4) 105 - 150%										
	Over Voltage Protection (*5)		165 - 240%			125 - 145%					
	Remote Sensing										
Function	Remote ON/OFF Control (*8)		Possible (SHORT: ON OPEN: OFF)								
	Parallel Operation										
	Series Operation (*8)				Poss	Possible					
	Operating Temperature (*6)			-20 to +85 (	Baseplate) Am	bient temperat	ure min=-20				
	Storage Temperature				-40 to	+ 85					
	Operating Humidity	%RH			30 - 95 (No	o dewdrop)					
F	Storage Humidity	%RH			10 - 95 (No	o dewdrop)					
Environment	Vibration			At no opera 0.825mm con	ting, 10-55Hz a stant (maximur	amplitude (swe n 49.0m/s²) ン	eep for 1min) <a href="text-4">(, Y, Z 1h each</a>				
	Shock				196.1m/s² (	In package)					
	Cooling (*7)				Conduction	on cooled					
Isolation	Withstand Voltage		Inpu	t-Baseplate : 2 Out	5kVAC, Input- put-Baseplate	Output : 3kVA : 500VDC for 1	.C (20mA) for 1 1min	min,			
	Isolation Resistance		More than 100M at 25 and 70%RH Output-Baseplate500VDC								
Standards	Safety Standards		Ap	Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1							
		i -									
Mechanical	Weight (typ) g 100										


- (\*1) At 48VDC and maximum output current.
- (\*2) 36 76 VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below. Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)



## **PH75F48 Specifications**

		MO	DEL										
ITEMS	/UNITS	IVIO	DEL	PH75F48-2	PH75F48-3	PH75F48-5	PH75F48-12	PH75F48-15	PH75F48-24	PH75F48-28			
	Voltage Range		V				DC36 - 76						
Input	Efficiency (typ)	(*1)	%	66	70	81	83	84	8	5			
	Current (typ)	(*1)	Α	0.95	1.34	1.93	1.90	1.86	1.88	1.85			
	Nominal Voltage		VDC	2	3	5	12	15	24	28			
	Maximum Current		Α		15		6.3	5	3.2	2.7			
	Maximum Power		W	30	45	75	75.6	75	76.8	75.6			
	Voltage Setting Accuracy	(*1)	%				±1						
Output	Maximum Line Regulation	(*2)	mV		20		48	60	96	112			
	Maximum Load Regulation	(*3)	mV		40		96	120	192	224			
	Temperature Coefficient						0.02%/						
	Voltage Adjustable Range(*10) ± 20% +20%, -60%									280			
	Over Current Protection (*4)         105% - 140%           Over Voltage Protection (*5)         165% - 240%         125% - 145%												
	Over Voltage Protection	165% -	- 240%										
	Remote Sensing				Possible								
Function	Remote ON/OFF Control	(*8)				Possible (S	HORT: ON (	OPEN: OFF)					
	Parallel Operation	(*8)					Possible						
	Series Operation	(*8)					Possible						
	I.O.G. Signal	(*8)				Possible	(Open collec	tor output)					
	Operating Temperature	(*6)			-20 to +	85(Baseplat	e) Ambient to	emperature r	min=-20				
	Storage Temperature						-40 to +100						
	Operating Humidity		%RH			30 -	95 (No dewo	drop)					
Environment	Storage Humidity		%RH			10 -	95 (No dewo	drop)					
LIMIOIIIICII	Vibration				At no op	perating, 10-	55Hz amplitu	ude (sweep f	or 1min)				
	Vibration				0.825mm	constant (ma	aximum 49.0	m/s²) X, Y,	Z 1h each				
	Shock						m/s² (In pac						
Cooling (*7) Conduction cooled													
	Withstand Voltage Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min												
Isolation	Withotalia Voltage	Output-Baseplate : 500VDC for 1min											
	Isolation Resistance			Мо	More than 100M at 25 and 70%RH Output-Baseplate500VDC								
Standards	Safety Standards				Approved b	y UL60950-1	I, CSA C22.2	2 No.60950-	1, EN60950				
Mechanical	Weight (typ)		g				150						
ouiuiildi	Size (W x H x D)		mm		6	2 x 12.7 x 86	(Refer to ou	utline drawing	g)				


- (\*1) At 48VDC and maximum output current.
- (\*2) 36 76VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)
- (\*10) At 48VDC Input. (Refer to instruction manual.)



## PH100S48 Specifications

ITEMS	S/UNITS MC	DDEL	PH100S48-3.3	PH100S48-5	PH100S48-12	PH100S48-15	PH100S48-24	PH100S48-28		
	Voltage Range	V			DC36	S - 76				
Input	Efficiency (typ) (*1	+ -	74	81	83	84	8	 5		
mpat	Current (typ) (*1	-	1.86	2.57	2.53	2.49	2.4			
	Nominal Voltage	VDC	3.3	5	12	15	24	28		
	Maximum Current	A		0	8.4	6.7	4.2	3.6		
	Maximum Power	W	66	100	100.8	100.5	100			
	Voltage Setting Accuracy (*1	) %			±	1				
Output	Maximum Line Regulation (*2	-	2	0	48	60	96	112		
	Maximum Load Regulation(*3	) mV	4	.0	96	120	192	224		
	Temperature Coefficient	<u></u>			0.029	P%/				
	Maximum Ripple & Noise (*9	) mVp-p	10	00	15	50	240	280		
	Voltage Adjustable Range(*8	3)		-	+10%, -10% (A	t 48VDC Input	)			
	Over Current Protection (*4	.)			105 -	150%	-			
	Over Voltage Protection (*5	5)	165 - 240%			125 - 145%				
F	Remote Sensing				Poss	sible				
Function	Remote ON/OFF Control (*8	3)		Pos	sible (SHORT:	ON OPEN: C	OFF)			
	Parallel Operation									
	Series Operation (*8	5)			Poss	sible				
	Operating Temperature (*6	5)		-20 to +85 (l	Baseplate) Am	bient temperat	ure min=-20			
	Storage Temperature				-40 to	+ 85				
	Operating Humidity	%RH			30 - 95 (No	dewdrop)				
Environment	Storage Humidity	%RH			10 - 95 (No	dewdrop)				
LIIVIIOIIIIIGIIL	Vibration			At no opera	ting, 10-55Hz a	amplitude (swe	ep for 1min)			
	VIDIALIOIT			0.825mm con	stant (maximur	n 49.0m/s²) ን	(, Y, Z 1h each			
	Shock 196.1m/s² (In package)									
	Cooling (*7	)			Conduction	on cooled				
	Withstand Voltage		Inpu	ut-Baseplate : 2	2.5kVAC, Input	-Output: 3kVA	AC(20mA) for 1	min		
Isolation				Out	put-Baseplate	: 500VDC for '	1min			
	Isolation Resistance		More	than 100M	at 25 and 70	%RH Output-E	Baseplate500	VDC		
Standards	Safety Standards		Ap	proved by UL6	· · · · · · · · · · · · · · · · · · ·		50-1, EN60950	)-1		
Mechanical	Weight (typ)	g			15	• •				
moonuniou	Size (W x H x D)	mm	m 62 x 12.7 x 86 (Refer to outline drawing)							

- (\*1) At 48VDC and maximum output current.
- (\*2) 36 76 VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below. Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)



## PH150S48 Specifications

ITEMS	/UNITS MO	DDEL	PH150S48-3.3	PH150S48-5	PH150S48-12	PH150S48-15	PH150S48-24	PH150S48-28			
	Voltage Range	V			D36	- 76					
Input	Efficiency (typ) (*1	) %	72	82	8	5	8	8			
	Current (typ) (*1	) A	2.75	3.81	3.0	68	3.	58			
	Nominal Voltage	VDC	3.3	5	12	15	24	28			
	Maximum Current	Α	3	0	12.5	10	6.3	5.4			
	Maximum Power	W	99		150		15	1.2			
	Voltage Setting Accuracy (*1	) %			±	:1					
Output	Maximum Line Regulation (*2	) mV	2	0	48	60	96	112			
	Maximum Load Regulation(*3	) mV	4	0	96	120	192	224			
	Temperature Coefficient				0.02	%/					
	Maximum Ripple & Noise (*9	) mVp-p	10	00	15	50	240	280			
	Voltage Adjustable Range(*8	)		-	+10%, -10% (A	t 48VDC Input	:)				
	Over Current Protection (*4	)			105 -	150%					
	Over Voltage Protection (*5	)	165 - 240%			125 - 145%					
Function	Remote Sensing				Poss	sible					
Function	Remote ON/OFF Control (*8	)		Pos	sible (SHORT	ON OPEN: C	OFF)				
	Parallel Operation										
	Series Operation (*8	)			Poss	sible					
	Operating Temperature (*6	)		-20 to +85 (	Baseplate) Am	bient tempera	ture min=-20				
	Storage Temperature				-40 to	+ 85					
	Operating Humidity	%RH			30 - 95 (No	o dewdrop)					
Environment	Storage Humidity	%RH			10 - 95 (No	o dewdrop)					
LIMIOIIIIGII	Vibration			At no opera	ting, 10-55Hz a	amplitude (swe	ep for 1min)				
	Vibration			0.825mm con	stant (maximur	m 49.0m/s²) ን	K, Y, Z 1h each				
	Shock		196.1m/s² (In package)								
	Cooling (*7	)			Conduction	on cooled					
	Withstand Voltage		Inpu	t-Baseplate : 2	2.5kVAC, Input	-Output : 3kVA	AC (20mA) for	1min			
Isolation	Withstalia Voltage			Out	put-Baseplate	: 500VDC for '	1min				
	Isolation Resistance		More	than 100M	at 25 and 70	%RH Output-E	Baseplate500	OVDC			
Standards	Safety Standards		Ap	proved by UL6	60950-1, CSA	C22.2 No.609	50-1, EN60950	)-1			
Mechanical	Weight (typ)	g			15	50					
mounanical	Size (W x H x D)	mm	m 72 x 12.7 x 86 (Refer to outline drawing)								

(\*1) At 48VDC and maximum output current.

(\*2) 36 - 76 VDC, constant Load.


(\*3) No load - full load, constant input voltage.

(\*4) Constant current limiting with automatic recovery.

(\*5) Inverter shutdown method, manual reset.

(\*6) Ratings - Refer to derating curve below.
- Load(%) is percent of maximum output current.


- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and Instruction manual.)



## PH150F48 Specifications

Voltage Range		N	/ODE	EL DH150E48-2	150F48-2 PH150F48-3 PH150F48-5 PH150F48-12 PH150F48-15 PH150F48-24 PH150F48-28									
Input	ITEMS	/UNITS	_	1111301 40-2	711130140-3	111130140-3		111130140-13	711130140-24	F111301 40-20				
Current (typ)				V			DC36 - 76							
Nominal Voltage	Input	Efficiency (typ) (*	<b>`1)</b> %	% 68	73	82	86	87	89	90				
Maximum Current		Current (typ) (*	'1) A	A 1.84	2.57	3.81	3.55	3.59	3.54	3.5				
Maximum Power   W   60   90   150   151.2		Nominal Voltage	VD	DC 2	3	5	12	15	24	28				
Voltage Setting Accuracy (*1) %		Maximum Current	A	Α	30		12.5	10	6.3	5.4				
Output         Maximum Line Regulation (*2) mV         20         48         60         96         11           Maximum Load Regulation (*3) mV         40         96         120         192         22           Temperature Coefficient         0.02%/           Maximum Ripple & Noise (*9) mVp-p         100         150         240         28           Voltage Adjustable Range (*10)         ± 20%         +20%, -60%           Over Current Protection (*4)         105% - 140%         0		Maximum Power	W	W 60	90		150		15	1.2				
Maximum Load Regulation (*3)         mV         40         96         120         192         22           Temperature Coefficient         0.02%/		Voltage Setting Accuracy (*	<b>'</b> 1) %	%			±1							
Temperature Coefficient	Output	Maximum Line Regulation (*	'2) m\	nV	20		48	60	96	112				
Maximum Ripple & Noise (*9) mVp-p		Maximum Load Regulation(*	'3) m\	nV	40		96	120	192	224				
Voltage Adjustable Range(*10)		Temperature Coefficient					0.02%/							
Over Current Protection (*4)		Maximum Ripple & Noise (*	'9) mVp	Vp-p	100		15	50	240	280				
Over Voltage Protection         (*5)         165% - 240%         125% - 145%           Remote Sensing         (*8)         Possible           Remote ON/OFF Control         (*8)         Possible (SHORT: ON OPEN: OFF)           Parallel Operation         (*8)         Possible           Series Operation         (*8)         Possible           I.O.G. Signal         (*8)         Possible (Open collector output)           Operating Temperature         - 20 to 85 (Baseplate) Ambient temperature MIN = -20           Storage Temperature         - 40 to + 85           Operating Humidity         %RH         30 - 95 (No dewdrop)           Storage Humidity         %RH         10 - 95 (No dewdrop)		Voltage Adjustable Range(*1	10)	±2	0%			+20%, -60%						
Remote Sensing (*8) Possible Remote ON/OFF Control (*8) Possible (SHORT: ON OPEN: OFF) Parallel Operation (*8) Possible Series Operation (*8) Possible I.O.G. Signal (*8) Possible (Open collector output) Operating Temperature (*6) - 20 to 85 (Baseplate) Ambient temperature MIN = -20 Storage Temperature - 40 to + 85 Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop)		Over Current Protection (*	*4)				105% - 140%	0						
Function Remote ON/OFF Control (*8) Possible (SHORT: ON OPEN: OFF) Parallel Operation (*8) Possible Series Operation (*8) Possible I.O.G. Signal (*8) Possible (Open collector output) Operating Temperature (*6) - 20 to 85 (Baseplate) Ambient temperature MIN = -20 Storage Temperature - 40 to + 85 Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop)		Over Voltage Protection (*	5)	165% -	- 240%		•	125% - 145%	Ď					
Parallel Operation (*8) Possible Series Operation (*8) Possible I.O.G. Signal (*8) Possible (Open collector output) Operating Temperature (*6) - 20 to 85 (Baseplate) Ambient temperature MIN = -20 Storage Temperature -40 to + 85 Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop)		Remote Sensing (*	·8)				Possible							
Series Operation (*8)   Possible	Function	Remote ON/OFF Control (*	·8)			Possible (S	HORT: ON (	OPEN: OFF)						
I.O.G. Signal (*8) Possible (Open collector output)  Operating Temperature (*6) - 20 to 85 (Baseplate) Ambient temperature MIN = -20  Storage Temperature -40 to + 85  Operating Humidity %RH 30 - 95 (No dewdrop)  Storage Humidity %RH 10 - 95 (No dewdrop)		Parallel Operation (*	·8)				Possible							
Operating Temperature (*6) - 20 to 85 (Baseplate) Ambient temperature MIN = -20 Storage Temperature -40 to + 85 Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop)		Series Operation (*	·8)				Possible							
Storage Temperature -40 to + 85 Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop)		I.O.G. Signal (*	·8)			Possible	(Open collec	tor output)						
Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop)		Operating Temperature (*	·6)		- 20 to 8	5 (Baseplate	) Ambient te	mperature M	IIN = -20					
Storage Humidity		Storage Temperature					-40 to + 85							
Fivironment		Operating Humidity	%R	RH		30 -	95 (No dewo	drop)						
Environment	F	Storage Humidity	%R	RH		10 -	95 (No dewo	drop)						
At no operating, 10-55Hz (sweep for 1min)	Environment	Vilantia.			At	no operating	g, 10-55Hz (s	sweep for 1m	nin)					
Vibration  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each		Vibration		Am	plitude 0.82	5mm consta	nt (maximum	1 49.0m/s²)	X, Y, Z 1h ea	ach				
Shock 196.1m/s² (In package)		Shock												
Cooling (*7) Conduction cooled		Cooling (*	7)			Co	nduction cod	led						
Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min		Maria de la INV-los de		In	put-Basepla	te: 2.5kVAC	, Input-Outp	ut : 3kVAC(2	0mA) for 1m	in				
Withstand Voltage   Output-Baseplate : 500VDC for 1min	Isolation	vvitnstand voitage				Output-Base	eplate : 500V	DC for 1min						
Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC		Isolation Resistance		Мо	re than 100N	Л at 25 а	and 70%RH	Output-Base	plate500V	DC				
Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1	Standards	Safety Standards		,	Approved by	UL60950-1	CSA C22.2	No.60950-1	, EN60950-1					
Weight (typ) a 180			g											
Mechanical Size (W x H x D) mm 83 x 12.7 x 86 (Refer to outline drawing)	wechanical	Size (W v H v D)			83 x 12.7 x 86 (Refer to outline drawing)									

- (\*1) At 48VDC and maximum output current.
- (\*2) 36 76 VDC, constant load.
- $(\ensuremath{^*}\xspace3)$  No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)




#### PH300S48 Specifications

ITEMS	/UNITS	МО	DEL	PH300S48-3.3	PH300S48-5	PH300S48-12	PH300S48-15	PH300S48-24	PH300S48-28	PH300S48-48		
	Voltage Range		V		ı	1	DC36 - 76					
Input	Efficiency (typ)	(*1)	%	80	84			88				
	Current (typ)	(*1)	Α	4.30	6.20		7.10		7.	16		
	Nominal Voltage		V	3.3	5	12	15	24	28	48		
	Maximum Current		Α	5	0	25	20	12.5	10.8	6.3		
	Maximum Power		W	165	250		300		30	2.4		
	Voltage Setting Accuracy	(*1)	%				±1					
0	Maximum Line Regulation	(*2)	mV	2	20	48	60	96	112	192		
Output	Maximum Load Regulation	(*3)	mV	4	-0	96	120	192	224	384		
	Temperature Coefficient						0.02%/					
	Maximum Ripple & Noise (0~+100	)(*9)	mVp-p	10	00	15	50	240	280	480		
	Maximum Ripple & Noise ( - 20~0	)(*9)	mVp-p	15	50	22	25	360	420	720		
	Voltage Adjustable Range(	*10)	%	+20	),-10		±	10		+20,-10		
	Over Current Protection	(*4)					105 - 150%					
	Over Voltage Protection	(*5)		140 - 170%	40 - 170% 125 - 145%							
	Remote Sensing	(*8)					Possible					
Function	Remote ON/OFF Control	(*8)				Possible (S	HORT: ON (	OPEN: OFF)	)			
	Parallel Operation (	*11)				Applic	able with CS	signal				
	Series Operation	(*8)		Possible								
	I.O.G. Signal	(*8)				Built-in (0	Open collecto	or output)				
	Operating Temperature	(*6)			-20 to +	100(Baseplat	te), Ambient	temperature	e min -20			
	Operating remperature	( 0)		-20 to +10	00 : 100%		-20 to +9	0:100%,+1	100 : 83%			
	Storage Temperature						-40 to + 100					
	Operating Humidity		%RH			30 -	95 (No dewo	drop)				
Environment	Storage Humidity		%RH			10 -	95 (No dewo	drop)				
	Vibration				At	no operating	j, 10-55Hz (s	sweep for 1m	nin)			
	Vibration			Am	plitude 0.82	5mm constar	nt (maximum	49.0m/s <sup>2</sup> )	X, Y, Z 1 h e	ach		
	Shock						196.1m/s <sup>2</sup>					
	Cooling	(*7)				Co	nduction coc	led				
	Withstand Voltage			Inp	out-Baseplat	e : 1.5kVAC,	Input-Outpu	t : 1.5kVAC(	20mA) for 1r	nin		
Isolation	Withotana Voltage					Output-Base	eplate : 500V	DC for 1min	l			
	Isolation Resistance			Мо	re than 100	M at 25	and 70%RH	Output-Base	eplate500V	DC		
Standards	Safety Standards			,	Approved by	UL60950-1,	CSA C22.2	No.60950-1	, EN60950-1			
Mechanical	Weight (typ)		g	200								
moonanioai	Size (W x H x D)		mm	83 x 12.7 x 86 (Refer to outline drawing)								

- (\*1) At 48VDC and maximum output current. (Baseplate temprature = +25 )
- (\*2) 36 76VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset with CNT signal.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.


- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)
- (\*10) At 48VDC Input. (Refer to instruction manual.)
- (\*11) External circuit is needed for operation. (Refer to instruction manual.)



### PH300F48 Specifications

Voltage Range	ITEMO	/HNITC	МО	DEL	PH300F48-2	H300F48-2 PH300F48-3 PH300F48-5 PH300F48-12 PH300F48-15 PH300F48-24 PH300F48-28									
Input   Efficiency (typ)	TIEMS		_		1110001 40 2	1110001400	1110001 40 0		1110001 40 10	1110001 40 24	1110001 40 20				
Current (typ)				-		I	I								
Nominal Voltage	Input	7 (717	` '	-			_								
Maximum Current		(717	(*1)			-	-								
Maximum Power   W   120   180   300   302.4				_	2		5		-						
Voltage Setting Accuracy (*1) %						1		_	20						
Maximum Line Regulation (*2) mV				W	120	180		300		30	2.4				
Maximum Load Regulation(*3)         mV         40         96         120         192         224           Temperature Coefficient         0.02%/		_ ,	` '	-				±1							
Temperature Coefficient	Output	Maximum Line Regulation	(*2)	mV		20		48	60	96	112				
Maximum Ripple & Noise (*9)   mVp-p   100   150   240   280			(*3)	mV		40		96	120	192	224				
Voltage Adjustable Range(*10)   ±20%		Temperature Coefficient						0.02%/							
Over Current Protection (*4)   105% - 140%		Maximum Ripple & Noise	(*9)	mVp-p		100	240	280							
Over Voltage Protection (*5)   165% - 240%   125% - 145%     Remote Sensing (*8)   Possible     Remote ON/OFF Control (*8)   Possible (SHORT: ON OPEN: OFF)     Parallel Operation (*8)   Possible (Open collector output)     I.O.G. Signal (*8)   Possible (Open collector output)     Operating Temperature (*6)   -20 to 85 (Baseplate) Ambient temperature MIN=20     Storage Temperature   Storage Humidity (NRH (Storage Humidity (NRH (Mark)))     Storage Humidity (NRH (Mark))   At no operating, 10-55Hz (sweep for 1min)     Amplitude 0.825mm constant (maximum 49.0m/s²) (X, Y, Z 1 h each (Mark))     Shock (Mark) (10 package)     Cooling (*7) (Conduction cooled (Mark))     Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min (Mark) (		Voltage Adjustable Range	*10)		± 2	± 20% +20%, -60%									
Remote Sensing (*8)		Over Current Protection	(*4)					105% - 140%	0						
Punction   Remote ON/OFF Control (*8)   Possible (SHORT: ON OPEN: OFF)		Over Voltage Protection	(*5)		165% -	165% - 240% 125% - 145%									
Parallel Operation (*8)		Remote Sensing	(*8)					Possible							
Series Operation (*8)	Function	Remote ON/OFF Control	(*8)				Possible (S	HORT: ON (	OPEN: OFF)						
I.O.G. Signal (*8) Possible (Open collector output)  Operating Temperature (*6) -20 to 85 (Baseplate) Ambient temperature MIN=20  Storage Temperature -40 to 85  Operating Humidity %RH 30 - 95 (No dewdrop)  Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  Shock 196.1m/s² (In package)  Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC(100mA) for 1min  Output-Baseplate : 500VDC(100mA) for 1min  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 250		Parallel Operation	(*8)					Possible							
Operating Temperature (*6) -20 to 85 (Baseplate) Ambient temperature MIN=20 Storage Temperature -40 to 85 Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each Shock 196.1m/s² (In package) Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC(100mA) for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1 Weight (typ) g		Series Operation	(*8)					Possible							
Storage Temperature Operating Humidity Storage Humidity WRH 10 - 95 (No dewdrop)  Storage Humidity Wibration Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each Shock Cooling Withstand Voltage Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC(100mA) for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Weight (typ)  Storage Temperature -40 to 85 Operating Humidity WRH 10 - 95 (No dewdrop) At no operating, 10-55Hz (sweep for 1min) Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each 196.1m/s² (In package) Conduction cooled Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC(100mA) for 1min Isolation Resistance Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1		I.O.G. Signal	(*8)				Possible	(Open collec	tor output)						
Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop) Vibration At no operating, 10-55Hz (sweep for 1min) Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each Shock 196.1m/s² (In package) Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC(100mA) for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1 Weight (typ) g		Operating Temperature	(*6)			-20 to 85	( Baseplate)	Ambient te	mperature M	IIN=20					
Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  Shock 196.1m/s² (In package)  Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC(100mA) for 1min  Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 250		Storage Temperature						-40 to 85							
At no operating, 10-55Hz (sweep for 1min) Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each Shock 196.1m/s² (In package) Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC(100mA) for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC Standards Safety Standards Weight (typ)  Mechanical  At no operating, 10-55Hz (sweep for 1min) Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each 196.1m/s² (In package) Conduction cooled Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC(100mA) for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC		Operating Humidity		%RH			30 -	95 (No dewo	drop)						
Vibration  At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  Shock  Cooling  (*7)  Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC(100mA) for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards  Safety Standards  Weight (typ)  Garage  Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1	F. 1	Storage Humidity		%RH			10 -	95 (No dewo	drop)						
Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  Shock  Cooling  (*7)  Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC(100mA) for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards  Safety Standards  Mechanical  Weight (typ)  g  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  196.1m/s² (In package)  Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC(100mA) for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards  Safety Standards  Weight (typ)  g  250	Environment					At	no operating	j, 10-55Hz (s	sweep for 1m	nin)					
Cooling (*7) Conduction cooled    Solution   Withstand Voltage   Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min     Solution   Output-Baseplate : 500VDC(100mA) for 1min     Isolation Resistance   More than 100M at 25 and 70%RH Output-Baseplate500VDC		Vibration			Am	plitude 0.82	5mm constar	nt (maximum	49.0m/s²)	X, Y, Z 1 h e	ach				
Withstand Voltage   Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min     Solation Resistance   More than 100M at 25 and 70%RH Output-Baseplate500VDC		Shock					196.1	m/s² (In pac	kage)						
Standards   Withstand Voltage   Output-Baseplate : 500VDC(100mA) for 1min     Isolation Resistance   More than 100M   at 25   and 70%RH Output-Baseplate500VDC		Cooling	(*7)				Co	nduction cod	led						
Solation   Output-Baseplate : 500VDC(100mA) for 1min     Isolation Resistance   More than 100M   at 25   and 70%RH Output-Baseplate500VDC		1400			In	put-Basepla	te: 2.5kVAC	, Input-Outp	ut : 3kVAC(2	0mA) for 1m	in				
Isolation Resistance   More than 100M at 25 and 70%RH Output-Baseplate500VDC	Isolation	Withstand Voltage				Out	out-Baseplat	e : 500VDC(	100mA) for	1min					
Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 250		Isolation Resistance			Мо						DC				
Mechanical Weight (typ) g 250	Standards	Safety Standards			,	Approved by									
Mechanical Strip		Weight (typ)		g		· · · · · ·									
( )	Mechanical	Size (W x H x D)		mm	n 146 x 12.7 x 86 (Refer to outline drawing)										

- (\*1) At 48VDC and maximum output current.
- (\*2) 36 76VDC, constant load.
- $(\ensuremath{^*}\xspace3)$  No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External capacitor is required. (Refer to instruction manual.)
- (\*10) At 48VDC input. (Refer to instruction manual.)



## PH50S110 Specifications

ITEMS	/UNITS MC	DEL	PH50S110-5	PH50S110-12	PH50S110-15	PH50S110-24	PH50S110-28				
	Voltage Range	V			DC82 - 185						
Input	Efficiency (typ) (*1)	%	80	82	83	8	4				
	Current (typ) (*1)	Α	0.57	0.	56	0.	55				
	Nominal Voltage	VDC	5	12	15	24	28				
	Maximum Current	Α	10	4.2	3.4	2.1	1.8				
	Maximum Power	W	50	50.4	51	50	).4				
	Voltage Setting Accuracy (*1)	%			± 1%						
Output	Maximum Line Regulation (*2)	mV	20	48	60	96	112				
	Maximum Load Regulation(*3)	mV	40	96	120	192	224				
	Temperature Coefficient				0.02%/						
	Maximum Ripple & Noise (*9)	mVp-p	100	1:	50	240	280				
	Voltage Adjustable Range(*8)			+10%,	-10% (At 110VDC	Input)					
	Over Current Protection (*4)				105% - 150%						
	Over Voltage Protection (*5)				125% - 145%						
Function	Remote Sensing										
runction	Remote ON/OFF Control (*8)			Possible	(SHORT: ON OF	PEN: OFF)					
	Parallel Operation										
	Series Operation (*8)				Possible						
	Operating Temperature (*6)		-2	20 to +85 (Basepl	ate) Ambient tem	perature min=-20					
	Storage Temperature				-40 to +85						
	Operating Humidity	%RH		30	0 - 95 (No dewdro	p)					
Environment	Storage Humidity	%RH		10	0 - 95 (No dewdro	p)					
LIMITOTITIETIL	Vibration			At no operat	ing, 10-55Hz (sw	eep for 1min)					
	Vibration		Amplitud	de 0.825mm cons	tant (maximum 49	9.0m/s²) X, Y, Z	1 h each				
	Shock	196.1m/s² (In package)									
	Cooling (*7)			(	Conduction coole	d					
	Withstand Voltage		Input-E	Baseplate : 2.5kV	AC, Input-Output	: 3kVAC(20mA) fo	or 1min				
Isolation	Withstand Voltage			Output-Ba	aseplate : 500VD	C for 1min					
	Isolation Resistance		More that	an 100M at 25	and 70%RH Ou	tput-Baseplate	500VDC				
Standards	Safety Standards		Appr	oved by UL60950	-1, CSA C22.2 N	o.60950-1, EN60	950-1				
Machanical	Weight (typ)	g			100						
Mechanical	Size (W x H x D)	mm	41 x 12.7 x 86 (Refer to outline drawing)								

(\*1) At 110VDC and maximum output current.

(\*2) 88 - 185VDC, constant load.


(\*3) No load - full load, constant input voltage.

(\*4) Constant current limiting with automatic recovery.

(\*5) Inverter shutdown method, manual reset.

(\*6) Ratings - Refer to derating curve below.
- Load(%) is percent of maximum output current.


- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)



## **PH75S110 Specifications**

	MO	DEL	DU750440.5	75S110-5 PH75S110-12 PH75S110-15 PH75S110-24 PH75S110-28										
ITEMS	/UNITS		PH/5S110-5	PH/5S110-12	PH/5S110-15	PH/5S110-24	PH75S110-28							
	Voltage Range	V			DC82 - 185									
Input	Efficiency (typ) (*1)	%	81	83	84	8	5							
	Current (typ) (*1)	Α	0.84	0.83	0.81	0.82	0.81							
	Nominal Voltage	VDC	5	12	15	24	28							
	Maximum Current	Α	15	6.3	5	3.2	2.7							
	Maximum Power	W	75	75.6	75	76.8	75.6							
	Voltage Setting Accuracy (*1)	%			±1									
Output	Maximum Line Regulation (*2)	mV	20	48	60	96	112							
	Maximum Load Regulation(*3)	mV	40	96	120	192	224							
	Temperature Coefficient				0.02%/									
	Maximum Ripple & Noise (*9)	mVp-p	100	15	50	240	280							
	Voltage Adjustable Range(*8)			+10%,	-10% (At 110VDC	C Input)								
	Over Current Protection (*4)				105% - 150%									
	Over Voltage Protection (*5)				125% - 145%									
Function	Remote Sensing													
Function	Remote ON/OFF Control (*8)			Possible	(SHORT: ON OP	EN: OFF)								
	Parallel Operation													
	Series Operation (*8)				Possible									
	Operating Temperature (*6)		-	20 to +85 (Basep	late) Ambient tem	perature min=-2	0							
	Storage Temperature				-40 to +85									
	Operating Humidity	%RH		30	) - 95 (No dewdro	p)								
Environment	Storage Humidity	%RH		10	) - 95 (No dewdro	p)								
Environment	Vibration			At no operati	ng, 10-55Hz (swe	eep for 1min)								
	Vibration		Amplitud	de 0.825mm cons	tant (maximum 4	9.0m/s²) X, Y, Z	1h each							
	Shock			196	6.1m/s² (In packaç	ge)								
	Cooling (*7)		Conduction cooled											
	Mithetend Veltere		Input-E	Baseplate : 2.5kVA	AC, Input-Output	3kVAC(20mA) f	or 1min							
Isolation	Withstand Voltage			Output-Ba	aseplate : 500VD0	C for 1min								
	Isolation Resistance		More tha	an 100M at 25	and 70%RH Ou	tput-Baseplate	500VDC							
	Safety Standards		Appro	oved by UL60950	-1, CSA C22.2 No	o.60950-1, EN60	950-1							
Standards	Carcty Ctaridatus													
Standards Mechanical	Weight (typ)	g			100									


- (\*1) At 110VDC and maximum output current.
- (\*2) 88 185VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
   Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)



## **PH75F110 Specifications**

ITEMS	/UNITS	МОІ	DEL	PH75F110-2	PH75F110-3	PH75F110-5	PH75F110-12	PH75F110-15	PH75F110-24	PH75F110-28	
	Voltage Range		V				DC82 - 185				
Input	Efficiency (typ)	(*1)	%	66	70	81	83	84	8	5	
	Current (typ)	(*1)	Α	0.41	0.58	0.84	0.83	0.81	0.82	0.81	
	Nominal Voltage		VDC	2	3	5	12	15	24	28	
	Maximum Current		Α		15		6.3	5	3.2	2.7	
	Maximum Power		W	30	45	75	75.6	75	76.8	75.6	
	Voltage Setting Accuracy	(*1)	%				±1				
Output	Maximum Line Regulation	(*2)	mV		20		48	60	96	112	
	Maximum Load Regulation	(*3)	mV		40		96	120	192	224	
	Temperature Coefficient						0.02%/				
	Maximum Ripple & Noise	(*9)	mVp-p		100		15	50	240	280	
	Voltage Adjustable Range (	*10)		± 2	0%			+20%, -60%			
	Over Current Protection	(*4)				•	105% - 140%	, 0			
	Over Voltage Protection	(*5)		165% -	- 240%			125% - 145%	, )		
	Remote Sensing	(*8)					Possible				
Function	Remote ON/OFF Control	(*8)				Possible (S	HORT: ON (	OPEN: OFF)			
Function	Parallel Operation	(*8)					Possible				
	Series Operation	(*8)					Possible				
	I.O.G. Signal	(*8)				Possible (	Open collec	tor output)			
	AUX-BIAS Power Supply					7-10VDC	Maximum Ic	ad 10mA			
	Operating Temperature	(*6)			-20 to +	85 (Baseplat	e) Ambient t	emperature	min=-20		
	Storage Temperature						-40 to +85				
	Operating Humidity		%RH			30 -	95 (No dewo	drop)			
Environment	Storage Humidity		%RH			10 -	95 (No dewo	drop)			
LIMIOIIIICIK	Vibration				At	no operating	j, 10-55Hz (s	sweep for 1m	iin)		
	Vibration			Am	plitude 0.82	5mm consta	nt (maximum	1 49.0m/s²)	X, Y, Z 1h ea	ach	
	Shock	1 (   1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1									
	Cooling	(*7)					nduction coc				
	Withstand Voltage			In	put-Basepla	te: 2.5kVAC	, Input-Outp	ut : 3kVAC(2	0mA) for 1m	in	
Isolation	Withstand Voltage					Output-Base	eplate: 500V	DC for 1min			
	Isolation Resistance			_	re than 100N			Output-Base	•		
Standards	Safety Standards			,	Approved by	UL60950-1,	CSA C22.2	No.60950-1	, EN60950-1		
Mechanical	Weight (typ)		g				150				
modianical	Size (W x H x D)		mm	62 x 12.7 x 86 (Refer to outline drawing)							

- (\*1) At 110VDC and maximum output current.
- (\*2) 88 185VDC, constant load.
- (\*3) No load full load, constant input voltage.
- $({}^\star 4)$  Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)
- (\*10) At 110VDC Input. (Refer to instruction manual.)





## PH150S110 Specifications

Voltage Range	ITEMO	MO	DEL	PH150S110-5	PH150S110-12	PH150S110-15	PH150S110-24	PH150S110-28				
Input   Efficiency (typ)	TIEMS			11110001100	1111000110 12		111100011024	111100011020				
Current (typ)		0 0 ,	-		T.							
Nominal Voltage	Input	, (), ,	%		_							
Maximum Current		(717)			1.	60		56				
Maximum Power   W   150			VDC	5	12	15	24					
Voltage Setting Accuracy (*1) %		Maximum Current	Α	30	12.5	10		_				
Output Maximum Line Regulation (*2) mV         20         48         60         96         112           Maximum Load Regulation (*3) mV         40         96         120         192         224           Temperature Coefficient Maximum Ripple & Noise (*9) mVp-p         100         150         240         280           Voltage Adjustable Range(*8) Voltage Adjustable Range(*8)         +10%, -10% (At 110VDC Input)         240         280           Over Current Protection (*4) Over Voltage Protection (*5)         125% - 145%         125% - 145%         125% - 145%           Remote Sensing Remote ON/OFF Control (*8) Possible (SHORT: ON OPEN: OFF)         Possible (SHORT: ON OPEN: OFF)         Possible (SHORT: ON OPEN: OFF)           Parallel Operation Series Operation (*8) Possible (SHORT: ON OPEN: OFF)         Possible (SHORT: ON OPEN: OFF)         Possible (SHORT: ON OPEN: OFF)           Storage Temperature Operating Temperature (*6) Possible (SHORT: ON OPEN: OFF)         -20 to +85 (Baseplate) Ambient temperature min=-20         Storage Humidity MRH         30 - 95 (No dewdrop)           Storage Humidity Wiration At no operating, 10-55Hz (sweep for 1min)         Input-Baseplate : 500VDC Or of 1min         At no operating, 10-55Hz (sweep for 1min)         Input-Baseplate : 500VDC For 1min<		Maximum Power			150		15	1.2				
Maximum Load Regulation (*3) mV		0 0 , ( ,	%			±1						
Temperature Coefficient	Output	Maximum Line Regulation (*2)	mV	20	48	60	96	112				
Maximum Ripple & Noise (*9)   m/pp   100   150   240   280		Maximum Load Regulation (*3)	mV	40	96	120	192	224				
Voltage Adjustable Range(*8)		Temperature Coefficient				0.02%/						
Over Current Protection (*4)		Maximum Ripple & Noise (*9)	mVp-p	100	15	50	240	280				
Function Fun		Voltage Adjustable Range(*8)			+10%,	-10% (At 110VDC	Input)					
Remote Sensing   Possible		Over Current Protection (*4)				105% - 150%						
Remote ON/OFF Control (*8) Parallel Operation Series Operation (*8) Possible Operating Temperature (*6) Storage Temperature Operating Humidity Storage Humidity Storage Humidity Wibration Shock Cooling Cooling Withstand Voltage  Isolation Use Safety Standards Weight (typ)  Remote ON/OFF Control (*8) Possible (SHORT: ON OPEN: OFF) Possible Possible Possible Possible Shock Operating Humidity Possible  Possible Shock Operating Humidity Possible  Possible Shock Operating Humidity Possible  Possible Shock Operating Humidity Possible  Newsible Shock Operating Humidity NRH  10 - 95 (No dewdrop)  At no operating, 10-55Hz (sweep for 1min) Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  Shock Operating Humidity Newsible  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards  Weight (typ)  9  150		Over Voltage Protection (*5) 125% - 145%										
Remote ON/OFF Control (*8) Possible (SHORT: ON OPEN: OFF)  Parallel Operation Series Operation (*8) Possible  Operating Temperature (*6) -20 to +85 (Baseplate) Ambient temperature min=-20 Storage Temperature -40 to +85 Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each Shock 196.1m/s² (In package) Cooling (*7) Conduction cooled  Withstand Voltage Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1	Eupotion	Remote Sensing				Possible						
Series Operation (*8) Possible  Operating Temperature (*6) -20 to +85 (Baseplate) Ambient temperature min=-20 Storage Temperature -40 to +85 Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop) Vibration Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each Shock 196.1m/s² (In package) Cooling (*7) Conduction cooled  Withstand Voltage Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1 Weight (typ) g 150	Function	Remote ON/OFF Control (*8)			Possible	(SHORT: ON OP	EN: OFF)					
Operating Temperature (*6) -20 to +85 (Baseplate) Ambient temperature min=-20  Storage Temperature -40 to +85  Operating Humidity %RH 30 - 95 (No dewdrop)  Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  Shock 196.1m/s² (In package)  Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 150		Parallel Operation										
Storage Temperature Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each Shock 196.1m/s² (In package) Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Usolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 150		Series Operation (*8)				Possible						
Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop) Vibration At no operating, 10-55Hz (sweep for 1min) Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each Shock 196.1m/s² (In package) Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1		Operating Temperature (*6)		-	-20 to +85 (Basep	late) Ambient tem	perature min=-2	0				
Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  Shock 196.1m/s² (In package)  Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 150		Storage Temperature				-40 to +85						
At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  Shock  Cooling  Withstand Voltage    Solution   Solution   Solution		Operating Humidity	%RH		30	) - 95 (No dewdro	p)					
Vibration  At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  Shock  Cooling  (*7)  Conduction cooled  Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC(20mA) for 1min  Output-Baseplate: 500VDC for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards  Safety Standards  Mechanical  Weight (typ)  g  At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  196.1m/s² (In package)  Conduction cooled  Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC(20mA) for 1min  Output-Baseplate: 500VDC for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC	F	Storage Humidity	%RH		10	) - 95 (No dewdro	p)					
Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  Shock  Cooling  (*7)  Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards  Safety Standards  Mechanical  Weight (typ)  g  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 h each  196.1m/s² (In package)  Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards  Mechanical	Environment	Vilantia a			At no operat	ing, 10-55Hz (swe	eep for 1min)					
Cooling (*7)  Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards  Mechanical  Weight (typ)  Gonduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1		Vibration		Amplitud	de 0.825mm cons	tant (maximum 49	9.0m/s²) X, Y, Z	1 h each				
Withstand Voltage   Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min     Solation Resistance   More than 100M at 25 and 70%RH Output-Baseplate500VDC		Shock			19	6.1m/s² (In packa	ge)					
Standards   Withstand Voltage   Output-Baseplate : 500VDC for 1min		Cooling (*7)		Conduction cooled								
Solation   Coutput-Baseplate : 500VDC for 1min   Isolation Resistance   More than 100M   at 25   and 70%RH Output-Baseplate500VDC   Standards   Safety Standards   Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1   Weight (typ)   g   150		127.1		Input-E	Baseplate : 2.5kV	AC, Input-Output	: 3kVAC(20mA) fo	or 1min				
Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 150	Isolation	Withstand Voltage			Output-Ba	aseplate : 500VD	C for 1min					
Weight (typ) g 150		Isolation Resistance		More the	an 100M at 25	and 70%RH Ou	tput-Baseplate	500VDC				
Weight (typ) g 150	Standards	Safety Standards		Appro	oved by UL60950							
Mechanical String Strin		Weight (typ)	g		-	-	· · · · · · · · · · · · · · · · · · ·					
	Mechanical	Size (W x H x D)			72 x 12.7 x	86 (Refer to outlin	ne drawing)					

- (\*1) At 110VDC and maximum output current.
- (\*2) 88 185VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.

- (\*6) Ratings Refer to derating curve below. Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)







## PH150F110 Specifications

ITEMS/	UNITS	JON	DEL	PH150F110-2	PH150F110-3	PH150F110-5	PH150F110-12	PH150F110-15	PH150F110-24	PH150F110-28	
		(*6)	V			<u> </u>	DC82 - 185				
Input	,	(*1)	%	68	73	83	86	87	89	90	
·		(*1)	Α	0.80	1.12	1.64	1.59	1.57	1.54	1.53	
	Nominal Voltage	` '	VDC	2	3	5	12	15	24	28	
	Maximum Current		Α		30		12.5	10	6.3	5.4	
	Maximum Power		W	60	90		150		15	1.2	
	Voltage Setting Accuracy (	(*1)	%				± 1				
Output	Maximum Line Regulation (	(*2)	mV		20		48	60	96	112	
	Maximum Load Regulation (	(*3)	mV		40		96	120	192	224	
	Temperature Coefficient						0.02%/			'	
	Maximum Ripple & Noise (	(*9)	mVp-p		100		15	50	240	280	
	Voltage Adjustable Range (*	10)		±2	0%			+20%, -60%	)		
	Over Current Protection (	(*4)				•	105% - 140%	, D			
	Over Voltage Protection (	(*5)		165% -	- 240%			125% - 145%	, 0		
	Remote Sensing (	(*8)					Possible				
Function	Remote ON/OFF Control (	(*8)				Possible (S	HORT: ON (	OPEN: OFF)			
	Parallel Operation (	(*8)					Possible				
	Series Operation (	(*8)					Possible				
	I.O.G. Signal (	(*8)				Possible (	(Open collec	tor output)			
	AUX-BIAS Power Supply					7-10VDC	Maximum Id	ad 10mA			
	Operating Temperature (	(*6)			-20 to +	85 (Baseplat	te) Ambient t	emperature	min=-20		
	Storage Temperature						-40 to +85				
	Operating Humidity		%RH			30 -	95 (No dewo	drop)			
Environment	Storage Humidity		%RH			10 -	95 (No dewo	drop)			
LIMIOIIIICIK	Vibration				At	no operating	j, 10-55Hz (s	sweep for 1m	nin)		
	VIDIATION			Am	plitude 0.82	5mm consta	nt (maximum	1 49.0m/s²)	X, Y, Z 1h e	ach	
	Shock					196.1	m/s² (In pac	kage)			
	Cooling (	(*7)				Coi	nduction coc	led			
	Withstand Voltage			In	put-Basepla	te: 2.5kVAC	, Input-Outp	ut : 3kVAC(2	20mA) for 1m	iin	
Isolation	Withotalia Voltage					Output-Base	eplate : 500V	DC for 1min			
	Isolation Resistance				e than 100N			•	eplate500\		
Standards	Safety Standards			,	Approved by	UL60950-1,		No.60950-1	, EN60950-		
Mechanical	Weight (typ)		g				180				
moonumou	Size (W x H x D)		mm	83 x 12.7 x 86 (Refer to outline drawing)							

- (\*1) At 110VDC and maximum output current.
- (\*2) 88 185VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.

- (\*6) Ratings Refer to derating curve below.
- Load(%) is percent of maximum output current.
   (\*7) Heatsink has to be chosen according to instruction manual.
- (\*O) Defends instruction according to instruction manual
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)
- (\*10) At 110VDC Input.(Refer to instruction manual.)







## **PH300F110 Specifications**

Input	ITEMS/	UNITS	МО	DEL	PH300F110-2	PH300F110-3	PH300F110-5	PH300F110-12	PH300F110-15	PH300F110-24	PH300F110-28	
Current (typ)		Voltage Range	(*6)	V			l	DC82 - 185				
Nominal Voltage	Input	Efficiency (typ)	(*1)	%	68	73	83	86	87	89	90	
Maximum Current		Current (typ)	(*1)	Α	1.60	2.24	3.29	3.17	3.13	3.09	3.05	
Maximum Power   W   120   180   300   302.4		Nominal Voltage		VDC	2	3	5	12	15	24	28	
Voltage Setting Accuracy (*1)		Maximum Current		Α		60		25	20	12.6	10.8	
Maximum Line Regulation (*2) mV		Maximum Power		W	120	180		300		30	2.4	
Maximum Load Regulation (*3) mV		Voltage Setting Accuracy	(*1)	%				±1				
Temperature Coefficient (%)   0.02%/   Maximum Ripple & Noise (*9)   mVpp   100   150   240   280   280   Voltage Adjustable Range (*10)   ±20%   +20%, -60%	Output	Maximum Line Regulation	(*2)	mV		20		48	60	96	112	
Maximum Ripple & Noise (*9)   mVp-p   100   150   240   280		Maximum Load Regulation	(*3)	mV		40		96	120	192	224	
Voltage Adjustable Range (*10)		Temperature Coefficient (	%)					0.02%/				
Over Current Protection (*4)		Maximum Ripple & Noise	(*9)	mVp-p		100		15	50	240	280	
Over Voltage Protection (*5)   165% - 240%   125% - 145%		Voltage Adjustable Range (	(*10)		± 2	20%			+20%, -60%	1		
Remote Sensing (*8)		Over Current Protection	(*4)					105% - 140%	0			
Remote ON/OFF Control (*8)		Over Voltage Protection	(*5)		165% -	- 240%			125% - 145%	,		
Parallel Operation (*8)		Remote Sensing	(*8)					Possible				
Parallel Operation (*8)	Eunction	Remote ON/OFF Control	(*8)				Possible (S	HORT: ON	OPEN: OFF)			
I.O.G. Signal (*8) Possible (Open collector output)  AUX-BIAS Power Supply 7-10VDC Maximum load 10mA  Operating Temperature (*6) -20 to +85 (Baseplate) Ambient temperature min=-20  Storage Temperature -40 to +100  Operating Humidity %RH 30 - 95 (No dewdrop)  Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each  Shock 196.1m/s² (In package)  Cooling (*7) Conduction cooled  Withstand Voltage Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Usolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g	Function	Parallel Operation	(*8)					Possible				
AUX-BIAS Power Supply  Operating Temperature (*6) Storage Temperature  Operating Humidity  Storage Humidity  Vibration  Shock  Cooling  Withstand Voltage  Isolation  Isolation Resistance  AUX-BIAS Power Supply  7-10VDC Maximum load 10mA  -20 to +85 (Baseplate) Ambient temperature min=-20  -40 to +100  Operating Humidity  %RH  30 - 95 (No dewdrop)  At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each  196.1m/s² (In package)  Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards  Safety Standards  Meight (typ)  9  250		Series Operation	(*8)					Possible				
Operating Temperature (*6) -20 to +85 (Baseplate) Ambient temperature min=-20 Storage Temperature -40 to +100 Operating Humidity %RH 30 - 95 (No dewdrop) Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each Shock 196.1m/s² (In package) Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1 Weight (typ) g 250		I.O.G. Signal	(*8)		, ,							
Storage Temperature Operating Humidity WRH 30 - 95 (No dewdrop) Storage Humidity Wibration  At no operating, 10 - 55Hz (sweep for 1min) Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each Shock Cooling (*7) Conduction cooled  Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC(20mA) for 1min Output-Baseplate: 500VDC for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC Standards Safety Standards Weight (typ)  Gudewdrop)  At no operating, 10 - 55Hz (sweep for 1min) Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each 196.1m/s² (In package) Conduction cooled Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC(20mA) for 1min Output-Baseplate: 500VDC for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC Standards Weight (typ)  Gudewdrop)  At no operating, 10 - 95 (No dewdrop)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each 196.1m/s² (In package) Conduction cooled  Input-Baseplate: 5.00VDC for 1min  Output-Baseplate: 500VDC for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards  Weight (typ)  Gudewdrop)		AUX-BIAS Power Supply					7-10VDC	Maximum Id	ad 10mA			
Operating Humidity %RH 30 - 95 (No dewdrop)  Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each  Shock 196.1m/s² (In package)  Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 250		Operating Temperature	(*6)			-20 to +	85 (Basepla	te) Ambient t	emperature	min=-20		
Storage Humidity %RH 10 - 95 (No dewdrop)  Vibration At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each  Shock 196.1m/s² (In package)  Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 250		Storage Temperature						-40 to +100				
At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each  Shock  Cooling  (*7)  Conduction cooled  Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC(20mA) for 1min  Output-Baseplate: 500VDC for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards  Safety Standards  Mechanical  Weight (typ)  g  At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each  196.1m/s² (In package)  Conduction cooled  Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC(20mA) for 1min  Output-Baseplate: 500VDC for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1		Operating Humidity		%RH			30 -	95 (No dewo	drop)			
Vibration  At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each  Shock  Cooling  (*7)  Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  Isolation Resistance  More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards  Safety Standards  Mechanical  Weight (typ)  Gtandards  At no operating, 10-55Hz (sweep for 1min)  Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each  196.1m/s² (In package)  Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min  Output-Baseplate : 500VDC for 1min  Book 196.1m/s² (In package)  Conduction cooled  Input-Baseplate : 3 not 70 no	Environment	Storage Humidity		%RH			10 -	95 (No dewo	drop)			
Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each Shock 196.1m/s² (In package) Cooling (*7) Conduction cooled  Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC Standards Safety Standards Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each 196.1m/s² (In package) Conduction cooled Input-Baseplate : 2.5kVAC, Input-Output : 3kVAC(20mA) for 1min Output-Baseplate : 500VDC for 1min Bolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC Standards Weight (typ)  9 250	LIMIOIIIICIK	Vibration				At	no operatino	g, 10-55Hz (s	sweep for 1m	nin)		
Cooling (*7) Conduction cooled  Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC(20mA) for 1min  Output-Baseplate: 500VDC for 1min  Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate500VDC  Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 250		VIDIATION			Am	plitude 0.82	5mm consta	nt (maximun	n 49.0m/s²)	X, Y, Z 1h e	ach	
Solation   Withstand Voltage   Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC(20mA) for 1min												
Solation   Withstand Voltage   Output-Baseplate: 500VDC for 1min     Isolation Resistance   More than 100M at 25 and 70%RH Output-Baseplate500VDC     Standards   Safety Standards   Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1     Weight (typ)   g 250		Cooling	(*7)				Co	nduction cod	oled			
Solation   Substitute   Subst		Withstand Voltage			In	put-Basepla	te: 2.5kVAC	, Input-Outp	ut : 3kVAC(2	:0mA) for 1m	nin	
Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1  Weight (typ) g 250	Isolation	Withstand Voltage					Output-Base	eplate : 500\	/DC for 1min			
Weight (typ) g 250		Isolation Resistance			_					•		
Mechanical	Standards	,			,	Approved by	UL60950-1	, CSA C22.2	No.60950-1	, EN60950-	1	
Size (W x H x D) mm 146 x 12.7 x 86 (Refer to outline drawing)	Mechanical			g				250				
		Size (W x H x D)		mm		14	16 x 12.7 x 8	6 (Refer to o	utline drawin	ıg)		

- (\*1) At 110VDC and maximum output current.
- (\*2) 82 185VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
   Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)
- (\*10) At 110VDC input.(Refer to instruction manual.)






### PH50S280 Specifications


ITEMS	S/UNITS N	10D	EL	PH50S280-3.3	PH50S280-5	PH50S280-12	PH50S280-15	PH50S280-24	PH50S280-28				
	Voltage Range		٧			DC200	0 - 400						
Input	Efficiency (typ) (	(*1)	%	72	80	82	83	8	4				
	Current (typ) (	(*1)	Α	0.16		0.22		0.	21				
	Nominal Voltage	١	VDC	3.3	5	12	15	24	28				
	Maximum Current		Α	1	0	4.2	3.4	2.1	1.8				
	Maximum Power		W	33	50	50.4	51	50	).4				
	Voltage Setting Accuracy (	(*1)	%			±	:1						
Output	Maximum Line Regulation (	*2)	mV	2	0	48	60	96	112				
	Maximum Load Regulation (	(*3)	mV	4	.0	96	120	192	224				
	Temperature Coefficient					0.02	%/						
	Maximum Ripple & Noise (	*9) r	mVp-p	10	00	150 240 280							
	Voltage Adjustable Range(	*8)			+	-10%, -10% (At	280VDC Inpu	t)					
	Over Current Protection (	(*4)				105 -	150%						
	Over Voltage Protection (	*5)		165 - 240%			125 - 145%						
Function	Remote Sensing (	*8)											
Function	Remote ON/OFF Control (	*8)			Pos	sible (SHORT	ON OPEN: C	OFF)					
	Parallel Operation (	*8)											
	Series Operation (	*8)				Pos	sible						
	Operating Temperature (	*6)			-20 to +85 (l	Baseplate) Am	bient temperat	ure min=-20					
	Storage Temperature					-40 to	+ 85						
	Operating Humidity	ç	%RH			30 ~ 95 (N	o dewdrop)						
Environment	Storage Humidity	Ç	%RH			10 ~ 95 (N	o dewdrop)						
Elivilolillelit	Vibration				At no opera	ting, 10-55Hz a	amplitude (swe	ep for 1min)					
	VIDIALIOII				0.825mm con:	stant (maximur	m 49.0m/s²) X	(, Y, Z 1h each					
	Shock					196.1m/s <sup>2</sup> (	In package)						
	Cooling (	*7)				Conduction	on cooled						
	Withstand Voltage			Inpu	ut-Baseplate : 2	2.5kVAC. Input	t-Output : 3kVA	AC(20mA) for 1	lmin				
Isolation	Willistand Voltage				Out	put-Baseplate	: 500VDC for 1	1min					
	Isolation Resistance			More	than 100M	at 25 and 70	%RH Output-E	Baseplate500	OVDC				
Standards	Safety Standards			Ар	proved by UL6	60950-1, CSA	C22.2 No.609	50-1, EN60950	)-1				
Mechanical	Weight (typ)		g			10	00						
wechanical	Size (W x H x D)		mm	41 x 12.7 x 86 (Refer to outline drawing)									

- (\*1) At 280VDC and maximum output current.
- (\*2) 200 400VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)



#### PH75S280 Specifications MODEL | PH75S280-3.3 | PH75S280-5 | PH75S280-12 | PH75S280-15 | PH75S280-24 | PH75S280-28 ITEMS/UNITS ٧ DC200 - 400 Voltage Range Efficiency (typ) (\*1)% 72 81 85 Current (typ) (\*1) 0.25 0.33 0.32 Α Nominal Voltage VDC 5 12 15 24 Maximum Current 6.3 5 3.2 Α 15 2.7 W Maximum Power 49.5 75 75.6 75 76.8 75.6 Voltage Setting Accuracy (\*1) % Output | Maximum Line Regulation (\*2) 20 48 60 96 112 96 Maximum Load Regulation(\*3) 40 120 192 224 Temperature Coefficient 0.02%/ Maximum Ripple & Noise (\*9) mVp-p 100 240 280 Voltage Adjustable Range(\*8) +10%, -10% (At 280VDC Input) Over Current Protection 105 - 150% Over Voltage Protection 165 - 240% 125 - 145% Remote Sensing Remote ON/OFF Control (\*8) Possible (SHORT: ON OPEN: OFF) Parallel Operation Series Operation (\*8)Possible (\*6) Operating Temperature -20 to +85 (Baseplate) Ambient temperature min = -20 Storage Temperature -40 to + 85 %RH 30 ~ 95 (No dewdrop) Operating Humidity Storage Humidity %RH 10 ~ 95 (No dewdrop) Fnvironmen: At no operating, 10-55Hz amplitude (sweep for 1min) Vibration 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each Shock 196.1m/s<sup>2</sup> (In package) Conduction cooled Cooling (\*7)Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC (20mA) for 1min, Withstand Voltage Isolation Output-Baseplate: 500VDC for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate...500VDC Standards Safety Standards Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1 Weight (typ) 100 g Mechanical Size (W x H x D) 41 x 12.7 x 86 (Refer to outline drawing) mm


- (\*1) At 280VDC and maximum output current.
- (\*2) 200 400 VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)



## PH75F280 Specifications

ITEMS	S/UNITS M	ODE	EL	PH75F280-2	PH75F280-3	PH75F280-5	PH75F280-12	PH75F280-15	PH75F280-24	PH75F280-28	
TTEIWIC	Voltage Range	<u> </u>	V				 DC200 - 400	)			
Input		*1)	%	66	70	81	83	84	8	5	
			A	0.16 0.23			33	0.32			
-	Nominal Voltage	-/	DC	2	3	5	12	15	24	28	
	Maximum Current		Α	15			6.3	5	3.2	2.7	
	Maximum Power	١	W	30	45	75	75.6	75	76.8	75.6	
	Voltage Setting Accuracy (*	*1)	%				±1				
Output	Maximum Line Regulation (*	'2) n	ηV		20		48	60	96	112	
	Maximum Load Regulation (*	*3) n	nV		40		96	120	192	224	
	Temperature Coefficient						0.02%/				
	Maximum Ripple & Noise (*	*9) m\	Vp-p		100		15	50	240	280	
	Voltage Adjustable Range (*1	10)		±2	0%			+20%, -60%	١		
	Over Current Protection (*	*4)				105% - 140%					
	Over Voltage Protection (*	'5)		165% -	240%	125% - 145%	,				
	Remote Sensing (*	<b>'</b> 8)		Possible							
· · · · · ·	Remote ON/OFF Control (*	<b>*</b> 8)		Possible (SHORT: ON OPEN: OFF)							
	Parallel Operation (*	<b>'</b> 8)		Possible							
	Series Operation (*	<b>*</b> 8)		Possible							
	I.O.G. Signal (*	<b>*</b> 8)		Possible (Open collector output)							
	Operating Temperature (*	<b>'</b> 6)		-20 to +85 (Baseplate) Ambient temperature min = -20 .							
	Storage Temperature						-40 to + 85				
	Operating Humidity	%	ίRΗ			30 -	- 95 (No dewdrop)				
Environment	Storage Humidity	%	βRΗ			10 -	95 (No dewdrop)				
Liviloninon	Vibration			At no operating, 10-55Hz amplitude(sweep for 1min)							
				0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each							
	Shock						m/s² (In pac	<u> </u>			
	Cooling (*	'7)					nduction cod				
	Withstand Voltage			Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC(20mA) for 1min							
Isolation		0			Output-Baseplate : 500VDC(100mA) for 1min						
_	Isolation Resistance	More than 100M at 25 and 70%RH Output-Baseplate  Approved by UL60950-1, CSA C22.2 No.60950-1, EN609						•			
Standards	Safety Standards			,	Approved by	UL60950-1,		No.60950-1	, EN60950-1		
Mechanical	Weight (typ)		g				150		`		
	Size (W x H x D)	m	nm	62 x 12.7 x 86 (Refer to outline drawing)							

- (\*1) At 280VDC and maximum output current.
- (\*2) 200 400VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve on the right. Load(%) is percent of maximum output current
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External capacitor is repuired. (Refer to instruction manual.)
- (\*10) At 280VDC input.(Refer to instruction manual.)




## PH100S280 Specifications

ITEMS/	MO	DEL	PH100S280-3.3	PH100S280-5	PH100S280-12	PH100S280-15	PH100S280-24	PH100S280-28			
TI LIVIS/		V			DC20	100					
laat	Voltage Range	-	74	04		0 - 400	0				
Input	Efficiency (typ) (*1)	%		81	83	84	85 0.42				
	Current (typ) (*1)		0.32	0.44		43		·-			
	Nominal Voltage	VDC	3.3	5	12	15	24	28			
	Maximum Current	A		0	8.4	6.7	4.2	3.6			
	Maximum Power	W	66	100	100.8	100.5	100	0.8			
	Voltage Setting Accuracy (*1)	%		_	48	:1					
Output	Maximum Line Regulation (*2)			20		60	96	112			
	Maximum Load Regulation (*3)	mV	4	0	96	120	192	224			
	Temperature Coefficient			0.02%/				280			
	Maximum Ripple & Noise (*9)	mVp-p	10	100 150 240							
	Voltage Adjustable Range(*8)			+10%, -10% (At 280VDC Input)							
	Over Current Protection (*4)			105 - 150%							
	Over Voltage Protection (*5)		165 - 240% 125 - 145%								
Function F	Remote Sensing		Possible								
	Remote ON/OFF Control (*8)		Possible (SHORT: ON OPEN: OFF)								
	Parallel Operation										
	Series Operation (*8)				Pos	sible					
	Operating Temperature (*6)			-20 to +85 (	Baseplate) Am	bient temperat	ure min=-20				
	Storage Temperature				-40 to	+ 85					
	Operating Humidity	%RH			30 ~ 95 (N	lo dewdrop)					
Environment	Storage Humidity	%RH			10 ~ 95 (N	o dewdrop)					
Environment	Vibration			At no operat	ting, 10-55Hz	amplitude (swe	eep for 1min)				
	Vibration			0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each							
	Shock				196.1m/s² (	In package)					
	Cooling (*7)				Conduction	on cooled					
	Mithetend Veltege		Inpu	Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC (20mA) for 1min,							
Isolation	Withstand Voltage			Out	put-Baseplate	: 500VDC for '	1min				
	Isolation Resistance		More than 100M at 25 and 70%RH Output-Baseplate500VDC								
Standards	Safety Standards		Ар	proved by UL	60950-1, CSA	C22.2 No.609	50-1, EN60950	)-1			
Manhanital	Weight (typ)	g			15	150					
Mechanical	Size (W x H x D)	mm		62 x 12.7 x 86 (Refer to outline drawing)							

- (\*1) At 280VDC and maximum output current.
- (\*2) 200 400VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.

- (\*6) Ratings Refer to derating curve below.
   Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)




## PH150S280 Specifications

ITEMS	/UNITS	МО	DEL	PH150S280-3.3	PH150S280-5	PH150S280-12	PH150S280-15	PH150S280-24	PH150S280-28		
	Voltage Range		V	DC200 - 400							
Input	Efficiency (typ)	(*1)	%	75	82	8	5	8	8		
	Current (typ)	(*1)	Α	0.47	0.65	0.0	63	0.61			
	Nominal Voltage		VDC	3.3	5	12	15	24	28		
	Maximum Current			3	0	12.5	10	6.3	5.4		
	Maximum Power			99	99 150 151.2						
	Voltage Setting Accuracy	(*1)	%			±	1				
Output	Maximum Line Regulation	(*2)	mV	2	0	48	60	96	112		
	Maximum Load Regulation	(*3)	mV	4	0	96	120	192	224		
	Temperature Coefficient					0.02	%/				
	Maximum Ripple & Noise	(*9)	mVp-p	10	00	15	50	240	280		
	Voltage Adjustable Range			+10%, -10% (At 280VDC Input)							
	Over Current Protection	(*4)		105 - 150%							
	Over Voltage Protection	(*5)		165 - 240% 125 - 145%							
Function F	Remote Sensing				Possible						
	Remote ON/OFF Control	(*8)		Possible (SHORT: ON OPEN: OFF)							
	Parallel Operation										
	Series Operation	(*8)		Possible							
	Operating Temperature	(*6)			-20 to +85(l	Baseplate) Amb	pient temperat	ure min=-20			
	Storage Temperature					-40 to	+ 85				
	Operating Humidity		%RH			30 - 95 (No	dewdrop)				
Environment	Storage Humidity		%RH			10 - 95 (No	dewdrop)				
LIIVIIOIIIIICII	Vibration				At no operat	ing, 10 - 55Hz	amplitude (swe	eep for 1min)			
	Vibration				0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each						
	Shock					196.1m/s² (	In package)				
	Cooling	(*7)				Conduction	on cooled				
	Withstand Voltage			Inpu	t-Baseplate : 2	5kVAC, Input-	Output: 3kVA	C (20mA) for 1	min,		
Isolation	vviinstana voitage			Output-Baseplate : 500VDC for 1min							
	Isolation Resistance		More than 100M at 25 and 70%RH Output-Baseplate500VDC								
Standards	Safety Standards			Ар	proved by UL6	60950-1, CSA	C22.2 No.609	50-1, EN60950	)-1		
Mechanical	Weight (typ)		g			15	50				
woonanical	Size (W x H x D)		mm		72 x 12.7 x 86 (Refer to outline drawing)						

- (\*1) At 280VDC and maximum output current.
- (\*2) 200 400VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.

- (\*6) Ratings Refer to derating curve below. Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)



#### PH150F280 Specifications MODEL | PH150F280-2 | PH150F280-3 | PH150F280-5 | PH150F280-12 | PH150F280-15 | PH150F280-24 | PH150F280-28 ITEMS/UNITS ٧ DC200 - 400 Voltage Range Efficiency (typ) (\*1)% 68 73 83 86 87 90 Current (typ) (\*1) 0.31 0.44 0.65 0.62 0.60 Α Nominal Voltage VDC 5 12 15 24 Maximum Current 30 12.5 10 6.3 Α 5.4 W Maximum Power 60 90 150 151.2 Voltage Setting Accuracy (\*1) ±1 Output | Maximum Line Regulation (\*2) 20 48 60 96 112 40 Maximum Load Regulation(\*3) 96 120 192 224 Temperature Coefficient 0.02%/ Maximum Ripple & Noise (\*9) mVp-p 100 240 280 Voltage Adjustable Range(\*10) ±20% +20%, -60% Over Current Protection 105% - 140% Over Voltage Protection (\*5) 165% - 240% 125% - 145% Remote Sensing (\*8)Possible Function Remote ON/OFF Control (\*8) Possible (SHORT: ON OPEN: OFF) Parallel Operation Possible (\*8)Series Operation (\*8)Possible I.O.G. Signal (\*8)Possible (Open collector output) Operating Temperature (\*6)-20 to 85 (Baseplate) Ambient temperature MIN =-20 Storage Temperature -40 to +85 Operating Humidity %RH 30 - 95 (No dewdrop) %RH Storage Humidity 10 - 95 (No dewdrop) Environmen At no operating, 10-55Hz (sweep for 1min) Vibration Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each Shock 196.1m/s<sup>2</sup> (In package) (\*7) Cooling Conduction cooled Input-Baseplate: 2.5kVAC, Input-Output: 3kVAC(20mA) for 1min Withstand Voltage Isolation Output-Baseplate: 500VDC for 1min Isolation Resistance More than 100M at 25 and 70%RH Output-Baseplate...500VDC Approved by UL60950-1, CSA C22.2 No.60950-1, EN60950-1 Standards Safety Standards

- (\*1) At 280VDC and maximum output current.
- (\*2) 200 400VDC, constant load.

Weight (typ)

Size (W x H x D)

Mechanical


- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.

g

- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.

83 x 12.7 x 86 (Refer to outline drawing)

- (\*9) External components are needed for operation.
- (Refer to basic connection and instruction manual.) (\*10) At 280VDC Input. (Refer to instruction manual.)
- **Derating Curve**




### PH300S280 Specifications

ITEMS	/UNITS	10[	DEL	PH300S280-3.3	PH300S280-5	PH300S280-12	PH300S280-15	PH300S280-24	PH300S280-28	PH300S280-48	
	Voltage Range	Ī	V				DC200 - 400	)			
Input	Efficiency (typ)	*1)	%	80	85			88			
		*1)	Α	0.74	1.05		1.22			23	
	Nominal Voltage	,	VDC	3.3	5	12	15	24	28	48	
	Maximum Current		Α	5	0	25	20	12.5	10.8	6.3	
	Maximum Power		W	165	165 250 300 302.4						
	Voltage Setting Accuracy (*1) %						±1%				
0	Maximum Line Regulation (	*2)	mV	2	:0	48	60	96	112	192	
Output	Maximum Load Regulation(	*3)	mV	4	.0	96	120	192	224	384	
	Temperature Coefficient						0.02%/				
	Maximum Ripple & Noise (0~+100 )	(0*)	mVp-p	10	00	15	50	240	280	480	
	Maximum Ripple & Noise ( - 20~0 )	(*9)	mVp-p	15	50	22	25	360	420	720	
	Voltage Adjustable Range(*	10)		+20%	, -10%		± 1	0%		+20%, -10%	
	Over Current Protection (	*4)					105 - 150%				
	Over Voltage Protection (	*5)		140-170% 125 - 145%							
	Remote Sensing (	*8)		Possible							
Function	Remote ON/OFF Control (	*8)		Possible (SHORT: ON OPEN: OFF)							
	Parallel Operation (*	11)		Applicable with CS signal							
	Series Operation (	*8)		Possible							
	I.O.G. Signal	*8)				Built-in (0	Open collecto	or output)			
	Operating Temperature (	*6)			-20 to +1	100 (Basepla	te) Ambient	temperature	min=-20		
	Operating Temperature (	*6)				-20	to +100 : 10	0%			
	Storage Temperature						-40 - + 100				
	Operating Humidity		%RH			30 -	95 (No dewo	drop)			
Environment	Storage Humidity		%RH			10 -	95 (No dewo	drop)			
	Vibration			At no operating, 10-55Hz (sweep for 1min)							
	VIDIALIOII			Am	plitude 0.82	5mm consta	nt (maximum	1 49.0m/s²)	X, Y, Z 1h e	ach	
	Shock						196.1m/s <sup>2</sup>				
	Cooling (	(*7) Conduction cooled									
	Withstand Voltage			In	put-Basepla	te: 2.5kVAC	, Input-Outp	ut : 3kVAC(2	20mA) for 1m	nin	
Isolation	Withstand Voltage			Output-Baseplate: 500VDC for 1min							
	Isolation Resistance			More than 100M at 25 and 70%RH Output-Baseplate500VDC							
Standards	Safety Standards				Approved b	y UL60950-1	I, CSA C22.	2 No.60950-	1, EN60950		
Mechanical	Weight (typ)		g				200				
WICHIAIIII	Size (W x H x D)		mm	83 x 12.7 x 86 (Refer to outline drawing)							

- (\*1) At 280VDC and maximum output current. (Baseplate temperature = +25 )
- (\*2) 200 400VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset with CNT signal.
- (\*6) Ratings refer to derating curve below.
  - Load(%) is percent of maximum output current.


- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)
- (\*10) At 280VDC Input. (Refer to instruction manual.)
- (\*11) External circuit is needed for operation . (Refer to instruction manual.)



### PH300F280 Specifications

ITEMS	/UNITS	МО	DEL	PH300F280-2	PH300F280-3	PH300F280-5	PH300F280-12	PH300F280-15	PH300F280-24	PH300F280-28		
	Voltage Range		V				DC200 - 400	)				
Input	Efficiency (typ)	(*1)	%	68	73	83	86	87	89	90		
		(*1)	Α	0.63	0.88	1.30	1.25	1.23	1.21	1.20		
	Nominal Voltage		VDC	2	3	5	12	15	24	28		
	Maximum Current		Α		60		25	20	12.6	10.8		
	Maximum Power	mum Power W		120	120 180 300 3					2.4		
	Voltage Setting Accuracy (*1)			±1								
Output	Maximum Line Regulation (*2)				20		48	60	96	112		
	Maximum Load Regulation	(*3)	mV		40		96	120	192	224		
	Temperature Coefficient				0.02%/° C							
	Maximum Ripple & Noise	(*9)	mVp-p		100		15	50	240	280		
	Voltage Adjustable Range(	*10)		±2	0%			+20%, -60%				
	Over Current Protection	(*4)					105% - 140%					
	Over Voltage Protection	(*5)		165% - 240% 125% - 145%								
Function	Remote Sensing	(*8)		Possible								
	Remote ON/OFF Control	(*8)		Possible (SHORT: ON OPEN: OFF)								
	Parallel Operation	(*8)		Possible								
	Series Operation	(*8)		Possible								
	I.O.G. Signal	(*8)			Possible (Open collector output)							
	Operating Temperature	(*6)	℃	-20 to +85 (Baseplate) Ambient temperature min=-20℃								
	Storage Temperature		℃				-40 to + 85					
	Operating Humidity		%RH			30 -	95 (No dewo	drop)				
Environment	Storage Humidity		%RH			10 -	95 (No dewo	drop)				
LIIVIIOIIIIIGIIL	Vibration			At no operating, 10-55Hz (sweep for 1min)								
	VIDIATION			Am	Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1h each							
	Shock					196.1	m/s² (In pac	kage)				
	Cooling	(*7)				Co	nduction coc	led				
	Withstand Voltage			In	put-Basepla	te: 2.5kVAC	, Input-Outp	ut : 3kVAC(2	0mA) for 1m	in		
Isolation	Withstand Voltage				Output-Baseplate : 500VDC(100mA) for 1min							
	Isolation Resistance			Mor	e than 100M	1Ω at 25°C a	and 70%RH	Output-Base	eplate500\	/DC		
Standards	Safety Standards			,	Approved by	UL60950-1,	CSA C22.2	No.60950-1	, EN60950-1			
Mechanical	Weight (typ)		g			250						
	Size (W x H x D)		mm		14	16 x 12.7 x 8	6 (Refer to o	utline drawin	g)			

- (\*1) At 280VDC and maximum output current.
- (\*2) 200 400VDC, constant load.
- (\*3) No load full load, constant input voltage.
- (\*4) Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)
- (\*10) At 280VDC Input. (Refer to instruction manual.)




### PH600S280 Specifications

ITEMS/	UNITS	DEL	PH600S280-3.3	PH600S280-5	PH600S280-12	PH600S280-15	PH600S280-24	PH600S280-28	PH600S280-48	
	Voltage Range	V				DC200 - 400	)			
Input	Efficiency (typ) (*1)	%	80	84			88			
	Current (typ) (*1)	Α	1.47 2.13 2.44							
	Nominal Voltage	VDC	3.3	5	12	15	24	28	48	
	Maximum Current	Α	10	00	50	40	25	21.5	12.5	
	Maximum Power	W	330	500		600		602	600	
	Voltage Setting Accuracy (*1)	%			•	±1			'	
Output	Maximum Line Regulation (*2)	mV	2	.0	48	60	96	112	192	
Output	Maximum Load Regulation(*3)	mV	4	.0	96	120	192	224	384	
	Temperature Coefficient					0.02%/°C				
	Maximum Ripple & Noise (0~+100°C)(*9)	mVp-p	10	00	15	50	240	280	480	
	Maximum Ripple & Noise (-20~0°C) (*9)	mVp-p	15	50	22	25	360	420	720	
	Voltage Adjustable Range(*10)		+20%, -10%			±1	0%		+20%, -10%	
	Over Current Protection (*4)			105 - 150%						
	Over Voltage Protection (*5)		140-170% 125 - 145%							
	Remote Sensing (*8)					Possible				
-	Remote ON/OFF Control (*8)			Possible (SHORT: ON OPEN: OFF)						
	Parallel Operation (*11)		Applicable with CS signal							
	Series Operation (*8)		Possible							
	I.O.G. Signal (*8)		Built-in (Open collector output)							
	Operating Temperature (*6)	°C		-20 to +10	00 (Baseplate -20 to +8	e) Ambient to 35: 100%, +1	•	nin=-20°C		
	Storage Temperature	℃				-40 to + 100				
	Operating Humidity	%RH			30 -	95 (No dewo	drop)			
Environment	Storage Humidity	%RH			10 -	95 (No dewo	drop)			
	Vibration			At	no operating	j, 10-55Hz (s	sweep for 1m	nin)		
	VIDIALIOII		Am	plitude 0.82	5mm consta	nt (maximum	49.0m/s²)	X, Y, Z 1h e	ach	
	Shock					196.1m/s <sup>2</sup>				
	Cooling (*7)				Coi	nduction cod	led			
Isolation	Withstand Voltage		In	put-Basepla	te : 2.5kVAC				in	
1001011011	Isolation Resistance		Mo	Output-Baseplate : 500VDC for 1min  More than 100MΩ at 25°C and 70%RH Output-Baseplate500VDC						
Standards	Safety Standards		1010		y UL60950-1			-		
	Weight (typ)	g			, =======	400		., 2		
Mechanical	Size (W x H x D)	mm		14	16 x 12.7 x 80		utline drawin	ia)		


- (\*1) At 280VDC and maximum output current.
- (Baseplate temperature = +25°C)
- (\*2) 200 400VDC, constant load.
- $(\ensuremath{^*3}\xspace)$  No load full load, constant input voltage.
- $(^*4)$  Constant current limiting with automatic recovery.
- (\*5) Inverter shutdown method, manual reset with CNT signal.
- (\*6) Ratings Refer to derating curve below.
  - Load(%) is percent of maximum output current.

- Baseplate : Refer to instruction manual.
- (\*7) Heatsink has to be chosen according to instruction manual.
- (\*8) Refer to instruction manual.
- (\*9) External components are needed for operation. (Refer to basic connection and instruction manual.)
- (\*10) At 280VDC input.(Refer to instruction manual.)
- (\*11) External circuit is needed for operation . (Refer to instruction manual.)




#### **Outline Drawing**

[PH50S] (Package Type: T41) [PH75S] (Package Type: T41)




- A: Model name, input voltage range, nominal output voltage, maximum output current, country of manufacture and safety marking (UL, C-UL [LEVEL3], BSI & CE marking, except 3.3V model) are shown here in accordance with the
- B: M3 tapped holes 2 for customer chassis mounting (FG). Screws must not protrude into power module by more than 12.7mm. (Back side for heat sink.)
- C: Input and output terminal ··· 4-Φ2

#### [PH100S] (Packege Type: T62)

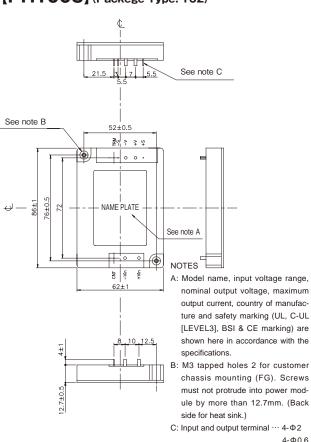


[PH75F] (Packege Type: T62)



- A: Model name, input voltage range, nominal output voltage, maximum output current, country of manufacture and safety marking (UL, C-UL [LEVEL3], BSI & CE marking) are shown here in accordance with the specifications.
- B: M3 tapped holes 2 for customer chassis mounting (FG). Screws must not protrude into power module by more than 12.7mm. (Back side for heat sink.)
- C: Input and output terminal ··· 4-Φ2

#### [PH150S] (Packege Type: T72)

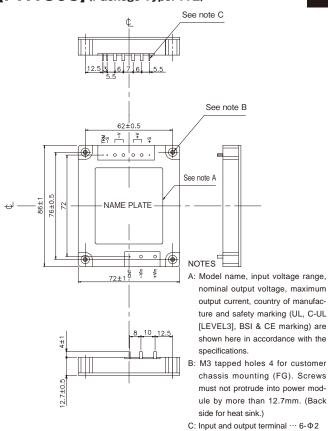

· All specifications are subject to change without notice.


Downloaded from Elcodis.com electronic components distributor

4-Ф0.6

PH

#### **Outline Drawing**

[PH100F] (Package Type: T83) [PH150F] (Package Type: T83)

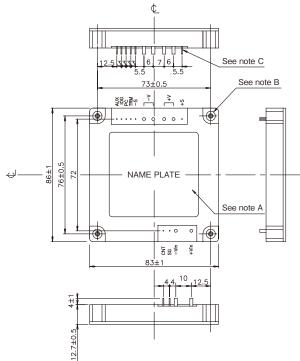


#### Notes

- A: Model name, input voltage range, nominal output voltage, maximum output current, country of manufacture and safety marking (UL, C-UL [LEVEL3], BSI & CE marking) are shown here in accordance with the specifications.
- B: M3 tapped holes 4 for customer chassis mounting (FG). Screws must not protrude into power module by more than 12.7mm. (Back side for heat sink.)
- C: Input and output terminal ··· 6-Φ2

[PH300F] (Package Type: T146)

РΗ

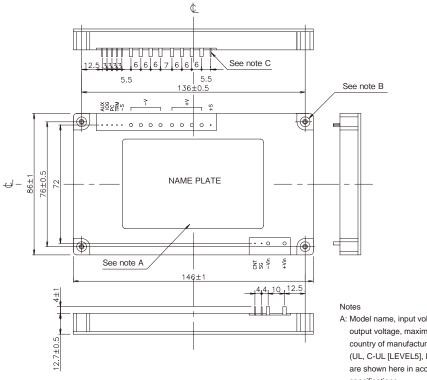


- A: Model name, input voltage range, nominal output voltage, maximum output current, country of manufacture and safety marking (UL, C-UL [LEVEL5], BSI & CE marking) are shown here in accordance with the specifications.
- B: M3 tapped holes 4 for customer chassis mounting (FG). Screws must not protrude into power module by more than 12.7mm. (Back side for heat sink.)
- C: Input and output terminal  $\cdots$  10-  $\!\Phi 2$


8-Ф0.6

### **Outline Drawing**

#### [PH300S] (Package Type: T83)

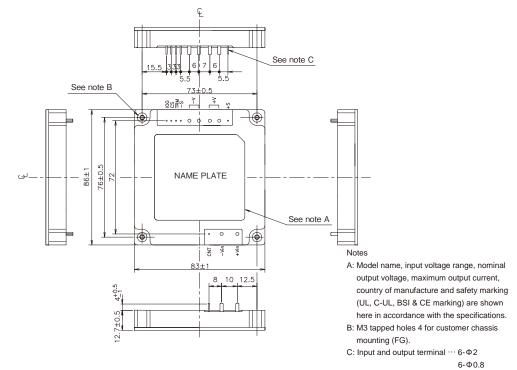


#### [PH600S] (Package Type: T146)

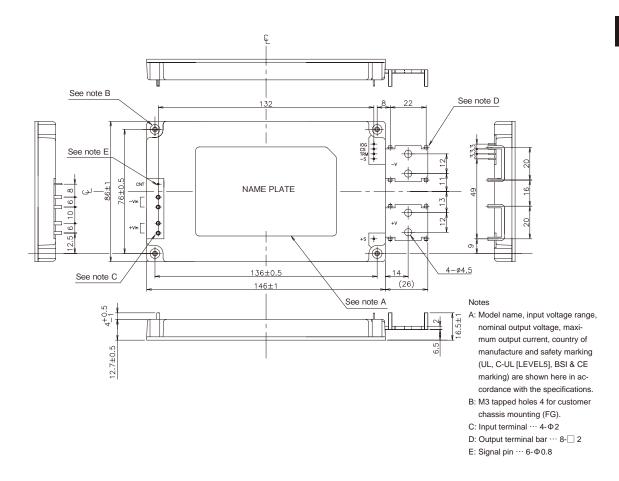

РΗ


#### **Block Diagram**

#### [PH50S, PH75S, PH100S, PH150S, PH300S, PH600S]

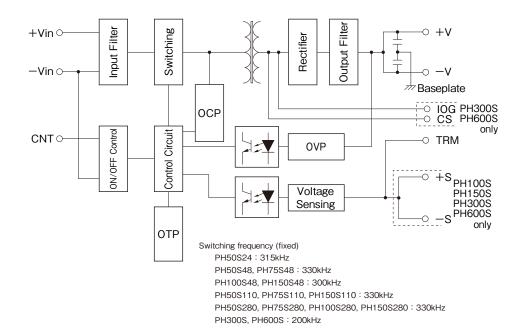

#### **Sequence Time Chart**

#### [PH50S, PH75S, PH100S, PH150S, PH300S, PH600S]

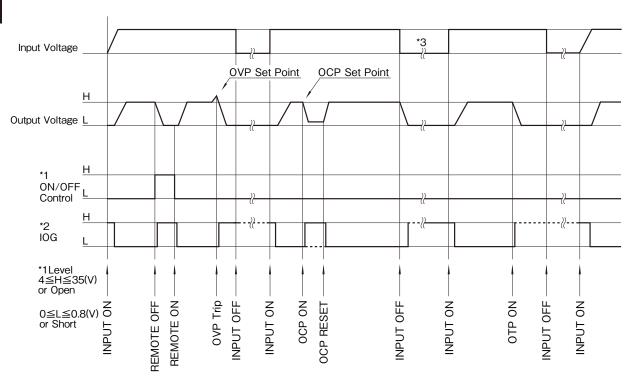


<sup>\*2</sup> Applicable to PH300S, PH600S only

PH

<sup>\*3</sup> Please note that the output shuts down when input interruption is less than 1s for PH50S, 75S, 100S, and 150S series. In case of input interruption, please use F-type PHs.

#### **Block Diagram**

#### [ PH75F, PH100F, PH150F, PH300F]

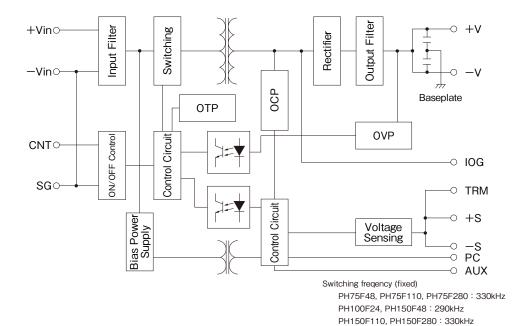

## Sequence Time Chart

PH300F24, PH300F48: 230kHz PH300F110, PH300F280: 210kHz

#### [ PH75F, PH100F, PH150F, PH300F]

Н Input Voltage L **OVP Set Point** OCP Set Point Output Voltage L ON/OFF H Control <u>H</u> IOG \*2 AUX \*1 Level 4≦H≦35(V) NPUT OFF or Open NO REMOTE OFF REMOTE ON **OVP Trip** OTP ON INPUT OFF INPUT ON OCP ON OCP RESET INPUT ON INPUT ON 0≦L≦0.8(V) or Short 5 4 7 - 10 (VDC)

ΡН

#### PH50 - 150, 75 - 300F Instruction Manual

#### **Before Using The Power Supply**

Pay attention to all warnings and cautions before using the unit. Incorrect usage could lead to an electric shock, damage to unit, or a fire hazard. Be sure read below warnings and cautions before using the power module.

#### 

- Do not touch heatsink and case which may be hot.
- Do not open the case and touch the internal components. They
  may have high temperature or high voltage which may get you in
  electric shock or burned.
- When the unit is operating, keep your hands and face away from the unit. You may get injured by an accident.

#### 

- Confirm that connections to input/output terminals and signal terminals are correct as indicated in the instruction manual.
- Attach a fast blow type external fuse to each module to ensure safety operation and to acquire each safety approval.
- This power supply is designed for professional installation within an end user equipment.
- For 48V input voltage, use isolated voltage by reinforced insulation at primary power supply or double insulation as input power

#### source

- The output from this power module must be considered as an energy hazard (>240VA power and 2V voltage) and must not be accesible to an end user. End equipment manufacturers must provide protection against inadvertent contact with the output terminals on this product by a service engineer or by service engineer dropping a tool into them.
- The application circuits and their parameters are for reference only. Be sure to verify effectiveness of application circuits and their parameters before finalizing circuit design.
- The information on this document is subject to change without notice. For actual design-in, please refer to the latest publications of data sheet, etc., for the most up-to-date specifications of this unit
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of Densei-Lambda.

#### Note : CE Marking

CE Marking, when applied to a product covered by this instruction manual, indicates compliance with the low voltage directive (73/23/EEC) as modified by the CE Marking Directive (93/68/EEC) which complies with EN60950.


### 1. Explanations on Specifications

#### **III** INPUT VOLTAGE RANGE

Input voltage ranges of PH series are as follows.

24VDC Input: 18 - 36VDC 48VDC Input: 36 - 76VDC 110VDC Input: 82 - 185VDC 280VDC Input: 200 - 400VDC

For 110VDC input model, it is necessary to derate the output power when the input voltage range is in the range of 82 - 88V.






Figure 1-1: PH110 Series Output Derating

Input Voltage (VDC)

Input voltage normally includes the ripple voltage ( $Vr_{\mbox{\tiny Pl}}$ ) as shown in Figure1-2. The ripple voltage shall be less than the following values.

24VDC Input: 2V 48VDC Input: 4V 110VDC Input: 10V 280VDC Input: 20V

When ripple voltage exceeds the above value, the output ripple voltage may become larger. Also, the output voltage may rise as the input voltage is fluctuated in dynamic line. The peak of input voltage wave shall be within the input voltage range.




Figure 1-2: Input Ripple Voltage

#### Basic Connection




Figure 1-3: Basic Connection Circuit

#### Input Fuse

No internal fuse is provided in power module. To ensure safety operation and to acquire safety standard approvals, attach an external fuse. The external fuse must be fast blow type and shall be attached to each power module individually.

Furthermore, attach the fuse at  $+V_{in}$  side if the ground terminal is at  $+V_{in}$  side and at  $+V_{in}$  side if the ground terminal is at  $+V_{in}$  side.

When the in-rush current causes some trouble at low impedance, use in-rush limiting circuit if necessary.

	50/75W	100W	150W	300W
24V	7A	15A	_	30A
48V	5A	7A	10A	20A
110V	2A	_	5A	10A
280V	1A	1.5A	2A	5A

Table 1-2: Recommend Rating Current of Input Fuse

#### C1: C1a/C1b

Attach capacitor(s) either between  $\pm V_{\text{in}}$  terminal and  $\pm V_{\text{in}}$  terminal or before L1.

As shown in Table1-3, location of the capacitor will be either C1a or C1b depending on each input voltage.

	50/75W	100W	150W	300W
24V C1a	_	_	_	1000 μ F
24V C1b	470 μ F	470 μ F	_	_
48V C1b	100 μ F	220 μ F	220 μ F	470 μ F
110V C1a	220 μ F	_	220 μ F	470 μ F
280V C1a	10μF	22 μ F	22 μ F	47 μ F

Table 1-3: Recommended Values of Input filter Capacitor

Because the ripple current flows in the capacitor, confirm the allowance of the ripple current prior to selection of the component.

In addition, attaching a film capacitor C1b (several  $\mu$  F) which can withstand large ripple currents is very effective in reducing the ripple current for 110V and 280V input models.

The following low ESR type Nippon Chemi-con capacitors, or equivalent are recommended:

For 24V input, use LXY Series

For 48V input, use LXV Series

For 110V and 280V input, use KMG Series

#### L1:

To reduce ripple current at C1 and output spike noise, attach common mode choke coil(s) in each power module individually.

Recommended Impedance Values:

24, 48, 110VDC Input: 1mH 280VDC Input: 2mH

Note: Depending on input filter construction, noise level might exceed noise specification and mis-operation might occur due to resonance of the filter.

To avoid mis-operation and spike noise problem, use an inductance which has a few tens  $\mu$  H of normal component.

#### C2: 4700pF

To improve the noise characteristics, use a ceramic capacitor which has high withstand voltage when safety standard is necessary to acquire.

24VDC Input: more than 2kVAC 48VDC Input: more than 3kVAC 110VDC Input: more than 3kVAC 280VDC Input: more than 3kVAC

During withstand voltage test, test voltage is applied across this capacitor. Therefore, select components with above recommended withstand voltage.

C2 shall be connected in between -Vin and baseplate as short as possible.

#### C3:

To avoid the effects of the output line impedance to the power module, attach a capacitor between +V terminal and -V terminal. Equivalent series resistance and equivalent series impedance of the electrolytic capacitor wiring may have some influence at the output during shutdown, or at the output ripple. The output ripple voltage may vary depending on the wiring method of printed circuit board. See the table shown at the end of this section. (Reference table for C3 Value.)

#### C4:

In case switch and connectors are used between the input power source and input terminals of the PH series, transient surge voltage may occur when switch is turned on/off, or during hot swap at active input line. Therefore, attach a capacitor C4 as shown in Figure 1-4.

24VDC Input: 470μF 48VDC Input: 100 - 470μF 110VDC Input: 220 - 470μF 280VDC Input: 10 - 47μF




Figure 1-4: Input Filter with Input Switch




Figure 1-5: Input Filter when several power modules are connected

#### **Reversed Connection of Input**

Reverse (-, + electrodes) connection of the input may cause damage to the power module. Whenever there is a possibility for a reverse input connection, attach a protective diode and an input fuse. The rated voltage of the protective diode shall be higher than input voltage, and the maximum in-rush current shall be higher than external fuse rating.




Figure 1-5: Protection for Reversed Connection of Input


#### 2-1 OUTPUT VOLTAGE RANGE (S type)

Output voltage can be adjusted within  $\pm 10\%$  of the nominal voltage by adjusting the external trimmer (variable resistor). However, note that OVP (Over Voltage Protection) will be activated when the output voltage is raised over specification range.


Furthermore, when the output voltage is adjusted to high, the output current shall be derated to a value that is prescribed by the maximum output power. Also, when output voltage is adjusted to high, there is a limitation on the input voltage range for each model as shown in Figure 2-1.

Values and connection methods of external resistors and variable resistor (VR) are shown as follows.






#### <48VDC Input>



#### <110VDC Input>






Figure 2-1: Limitation of Input Voltage Range

⟨Example1, 2: Values and Methods of Resistor and variable Resistor Networks⟩

	3V	5V	12V	15V	24V	28V
R1	4.7k	3.9k	3.9k	5.6k	10k	12k
R2	1.3k	1.8k	680	750	820	820
VR	10k	10k	1k	1k	1k	1k

R1, R2: ±5% Tolerance

VR: ±20% Total Tolerance below 1% End Resistanced

Table2-1: Values for External Resistor and Variable Resistor of connection

example 1 and 2 (Vo (typ)±10% adjastable)

PH






Figure2-2: Connection Example of External Resistor Network #1 (no ±S Terminal, PH50S/PH75S)




Figure2-3: Connection Example of External Resistor Network #2 (with ±S Terminal)

In the same way, remote sensing wires can be connected to load.

# $\langle \text{Example 3: Values and Method of Resistor and variable} \\ \text{Resistor Networks} \rangle$

For S type model with remote sensing terminal, the following method can be used.

Variable resistor is attached as remote programming resistor, and the output can be remotely programmed. Ratio of remote programming resistor is basically  $1V/k\Omega$ .

	3V	5V	12V	15V	24V	28V
R1	1.5k	3.9k	30k	33k	68k	68k
VR	1k	2k	5k	10k	10k	20k

R1: ±5% Tolerance

VR: ±20% Total Tolerance below 1% End Resistance

Table2-1: Values for External Resistor and Variable Resistor Networks (±10% Output Voltage Change)





Figure2-4: Connection Example of External Resistor Network #3 PH100S/PH150S


In the same way, remote sensing wire can be connected to load terminal input.


# 2 - 2 OUTPUT VOLTAGE RANGE (F type)

The output voltage can be adjusted within -60% -  $\pm$ 20% (2V, 3V:  $\pm$ 20%) of nominal voltage range. However, note that OVP will be activated when output voltage is raised over specification range.

Furthermore, when the output voltage is adjusted to high, the output current shall be derated to a value that is prescribed by the maximum output power. Also, when output voltage is adjusted to high, there is a limitation on the input voltage range for each model as shown in Figure 2-5, as well as limitation on the minimum output current as shown in Figure 2-6 for each model.










Figure2-5: Limitation of Input Voltage




Figure2-6: Minimum Output Current Limit

Resistance values and connection method of external resistor and variable resistor are shown as follows.

In this case, variable resistor is attached as remote programming resistor, and the output can be remotely programmed. Also, aside from remote programming resistor, remote programming can be done externally by voltage source.

	2V	3V	5V	12V	15V	24V	28V
R1	20k	20k	3.3k	3.3k	3.3k	3.3k	3.3k
VR	2k	2k	20k	50k	50k	100k	100k

R1: ±5% Tolerance

VR: ±20% Total Tolerance below 1% End Resistance

Table2-3: Values of External Resistor and Variable Resistor (-60 to +20% Output Voltage Change; ±20% for 2V 3V)

	2V	3V	5V	12V	15V	24V	28V
R1	43k						
VR	1k	1k	2k	5k	5k	10k	10k

R1: ±5% Tolerance

VR: ±20% Total Tolerance End Resistance below 1%

Table2-4 : Values of External Resistor and Variable Resistor (±10% Output Voltage Change)




Figure 2-7: Connection Example of External Resistor

In the same way, remote sensing wires can be connected to load terminal input.

⟨Changing Output Voltage by Applying External Reference Voltage; F type only⟩

On F type power module, the output voltage can be adjusted within the same range as remote programming with variable resistor by applying external voltage to TRM terminal. The output voltage for this case can be calculated by the following equation.

Output Voltage=TRM Voltage × Nominal Output Voltage

#### (Reference) Trim Circuit




Figure 2-8: Network of Trim Circuit

Reference voltage for Voltage Detection Amplifier is the TRM terminal voltage. When TRM terminal is 1.0V (TYP), output is nominal voltage.

For other applications not described here, use this value as a reference when selecting external component values.

#### (Application Example of External Voltage)




Figure 2-9: Example of Applied Voltage

# **MAXIMUM OUTPUT RIPPLE & NOISE**

The maximum output ripple and noise are measured by the following prescribed method based on JEITA RC-9141.

The connection is shown in Figure 3-1. Attach a film capacitor ( $1\mu$ F) to a point 50mm from the output terminal. Then attach a coaxial cable with JEITA attachment to both sides of the film capacitor as shown in Figure 3-1. Oscilloscope shall be set at 100MHz band width.




Figure3-1: Measurement Method of Maximum Output Ripple Voltage (including Noise)

# 4 MAXIMUM LINE REGULATION

Maximum line regulation is defined as the output voltage deviation when the input voltage is slowly varied (steady-state) within the input voltage range.

# 5 MAXIMUM LOAD REGULATION

Maximum load regulation is defined as the output voltage deviation when the output current is slowly varied (steady-state) within the output current range.

#### ⟨S type⟩

A minimum load current of more than 3% (4% for PH50S) of the nominal output current shall be taken when the load current is dynamically changed. In case the load current is changed from less than the above minimum load current value, the output voltage may dynamically fluctuate.

When using module in dynamic load mode, audible noise could be heard and output voltage fluctuation will increase. Therefore, please evaluate thoroughly when using this module.

# **6** OVER CURRENT PROTECTION (OCP)

OCP function is provided.

Output will automatically recover when short or overload condition is released. This setting value is fixed and cannot be change externally.

Note that the module may be damaged depending on thermal conditions when operating continuously under short or overload condition for a long period.

# **7** OVER VOLTAGE PROTECTION (OVP)

OVP function is provided.

The setting value is relative to the nominal output voltage and is fixed. Therefore, it cannot be changed externally.

To recover the output voltage after OVP function activates, wait until input voltage becomes less than the following voltage values and then reapply input voltage.

	S type	F type
24VDC Input	10VDC	10VDC
48VDC Input	13.5VDC	4.5VDC
110VDC Input	25VDC	10VDC
280VDC Input	90VDC	25VDC

Table7-1: Input Voltage to Release OVP

# **8** THERMAL PROTECTION

Thermal protection is provided.

This function activates for abnormal ambient temperature rise and abnormal internal temperature rise of power supply and shuts the output off. Thermal protection will activate at  $100\pm15^{\circ}\text{C}$  baseplate temperature.

To recover the output, shut off the input once, and then reapply input after the baseplate temperature has been cooled down sufficiently.

# 9 REMOTE SENSING (+S, -S TERMINALS)

In the power modules except S type of 50W and 75W, there are remote sensing terminals to compensate the voltage drop caused by wiring to load terminal from output terminal of the power supply. If the remote sensing function is unnecessary (i.e. local sensing is used), shorten with wires +S terminal to +V terminal, and -S terminal to -V terminal. Compensated voltage range of line drop (voltage drop by wiring) shall be set such that output voltage between +V and -V does not exceed specified output voltage range and output must be within the maximum output power value. Also, line drop voltage between -V and -S (-V and negative side of the load) shall be less than 2V. To avoid and to decrease the noise affects, shielded wire, twisted wire, and parallel pattern wire etc. shall be used as remote sensing wire.




Figure9-1: Using Remote Sensing




Figure 9-2: Without Remote Sensing

# ON/OFF CONTROL (CNT TERMINAL)

The output can be turned on or off without shutting down the input.

The control circuit is in the input side (primary side), and CNT terminal is used. The ground of CNT terminal is SG terminal for a module with SG terminal, and -V<sub>in</sub> terminal for a module without SG terminal. -V terminal and SG terminal is connected inside of the module. If this function is unnecessary, short CNT and SG terminals.

- The maximum applied voltage to CNT terminal is 35V, and the reversed voltage is -0.7V maximum. Source current of CNT terminal is approximately 0.5mA. If the wire would be long, attach 0.1µF capacitor between CNT terminal and SG terminal.
- ON/OFF control can be controlled by the device switching on/off of the contact point (switch or relay) or photocoupler. The ON/OFF control circuit shall be insulated by relay or photocoupler.
  - \*When using photocoupler, connect CNT and SG terminals as short as possible at transistor side.




Figure 10-1: Connection of CNT Terminal

CNT Level for Input-V <sub>in</sub> (SG)	Output Status
4V≦H≦35V or Open	OFF
0≦L≦0.8V or Short	ON

Table 10-1: ON/OFF Control Mode

#### Caution –

PH

If -Vin is not connected, or improperly connected, internal circuit of power module could be damaged when input is applied. For example, CNT terminal could blow out when current flows through an abnormal path such as  $+V_{\text{in}}$  to CNT created by improper connection.

To avoid such a damage, ensure all the terminals are connected before input is applied.

### **II** PARALLEL OPERATION (PC TERMINAL)

Only F type power modules provide PC terminal. By connecting PC terminal of each module, up to 11 units of same model (same output voltage and current) can be connected in parallel, and the output current is equally shared among each power module.

Note that maximum output power of each module should not exceed specifications.

By setting accuracy of output voltage of each power module in parallel operation within  $\pm 1\%$ , the maximum load current can be used up to 95% of nominal output current value.

#### (Example)

2 units of PH300F48-5 are to be used in parallel operation. The total nominal output current is 120A, then

$$120 \times 0.95 = 114(A)$$

will be calculated as the maximum load current.

For details of parallel connection and redundant operation, refer to Application Note "Parallel Operation."

### **12** SERIES OPERATION

Series operation is available for all PH series models.

Contact us for maximum allowable units that can be used in series operation.

#### (A) Series Operation for High Output Voltage

In series operation for high output voltage configurations, attach a by-pass diode to avoid to applying reverse voltage.

Rating of by-pass Diode, D1 and D2

- Repetitive Reversed Voltage
   VRRM≥2 times as rated output voltage
- Average of Output Current
   lo≥2 times as rated output current
- Forward Voltage Drop V<sub>F</sub>≧minimum (Schottky barrier type)




Figure 12-1: Series Operation for High Output Voltage Configurations

#### (B) Series Operation using ±Output

No diode is necessary if + side load and - side load are completely separated.




Figure 12-2: Series Operation using ± Output

# III I.O.G. SIGNAL (IOG TERMINAL)

I.O.G. signal is provided in the F type power module. By using IOG terminal, good/no good operation can be monitored

This monitoring signal output is in the secondary (output) side and is an open collector output.

At good inverter operation, IOG monitors LOW (maximum sink current = 5mA; maximum applied voltage = 35V).

When OCP is operating, IOG signal becomes unstable. Ground of IOG terminal is -S terminal.

In parallel operation as shown as Figure 13-1, the minimum load current shall be more than 10% of the total nominal output current. Note that If load is less than 10%, IOG signal may be unstable.

In a parallel application where diode is used at the output of the power module, required minimum load current is not specified.

(Sensing point is at anode side of the diode.)




Figure 13-1: Example of IOG Terminal Connection

(Example)

2 units of PH300F48-5 are to be used in parallel operation. The total nominal output current is 120A, then

 $120 \times 0.1 = 12$  (A)

will be calculated as the minimum load current.

# AUXILIARY POWER SUPPLY FOR EXTERNAL SIGNAL (AUX TERMINAL)

AUX terminal is provided inside the F type power module. The output voltage of AUX terminal is in the range of 7 - 10 VDC, and the maximum output current is 10mA.

When using this terminal in parallel connection with other AUX terminal in DC/DC power modules, a diode must be attached. See Fig13-1 for connection example. Even for this case, maximum output current should be 10mA.

Avoid connecting AUX terminal directly with other terminals of the module because this may damage the power module.

Ground of AUX terminal is -S terminal.

### **ID OPERATING TEMPERATURE**

By maintaining baseplate temperature below 85°C at actual operating conditions, operation is possible. For details of thermal design, refer to Application Note "Thermal Design."

### 16 OPERATING HUMIDITY

Note that dew condensations may cause abnormal opera-

tion and damage to power module.

### **ID** STORAGE TEMPERATURE

Note that abrupt temperature changes may cause condensation and bad effects on soldering.

# STORAGE HUMIDITY

Storing power modules in high temperature and high humidity creates oxidation on each terminals and causes soldering problems.

# **19 COOLING METHOD**

Because the operating temperature range is prescribed by baseplate temperature, several cooling methods are possible.


For details of thermal design, refer to Application Note "Thermal Design."

### ☑ BASEPLATE TEMPERATURE VS. OUTPUT REGULATION


Baseplate temperature vs. output regulation is defined as the output voltage deviation ratio when operating baseplate temperature is changed.

# 21 WITHSTAND VOLTAGE

This PH series is designed to withstand 2.5kVAC between input and baspelate, and 3kVAC between input and output for 1 minute each. (For 24VDC input model, it is designed to withstand 2kVAC between input and baseplate, and 2kVAC between input and output for 1 minute). When withstand voltage test would be carried out at incoming inspection etc., the limit value of the tester shall be set at 20mA.




2.5kVAC for 1 minute (20mA) (24VDC Input model: 2kVAC) Figure21-1: Withstand Voltage Test between Input and Baseplate



3kVAC for 1 minute (20mA) (24VDC Input model: 2kVAC) Figure21-2: Withstand Voltage Test between Input and output

# PH50 - 150, 75 - 300F

This series is designed to withstand 500VDC between output and baseplate for 1 minute. When the test would be carried out at incoming inspection etc., be sure not to apply AC voltage; apply DC voltage. In case AC voltage is applied, the power module might be damaged.



500VDC between output and baseplate for 1 minute Figure21-3: Withstand Voltage Test between output and baseplate


Do not apply the test voltage by throw-in. Gradually raise the voltage from zero, and also gradually drop down the tester for shut off. Especially take care when using withstand voltage tester with timer because impulse is generated which is several times high as the applied voltage when the switch is turned off by the timer which might cause damage to the module.

Short the output side as shown in Fig.21-1 to Fig.21-3.

# **M** INSULATED RESISTANCE

DC insulated tester (max. 500V) shall be set between output and baseplate. The insulated resistance is more than  $100M\Omega$  at 500VDC. Depending on insulation testers, high pulse may occur when the voltage is changed.

Be sure that the tester is fully discharged by a resistor etc. after every test.



(more than 500MΩ between the output and baseplate at 500VDC) Figure22-1: Insulation Test

# **28 VIBRATION**

Refer to Application Note "Installation."

Power Module Vibration specification value is the value when Power Module alone is mounted on Printed Wiring Board.

Therefore, when using large-sized heatsink, be sure to fix not only on Power Module but also on Equipment Chassis in order to avoid excessive stress on Power Module and Printed Wiring Board.

# **24** SHOCK

Values are measured at our packing and shipping conditions.

### 四 OTHERS

The performance of a system with Power Module is influenced according to various conditions -- PCBs, chassis, mechanics, heat dissipation.

Please evaluate actual products, and confirm its performance.

(For details, please refer Power Module Application Note.)

#### Reference table for C3 Value

					·	
Model Vout	PH50S PH75S	PH75F	PH100S PH150S	PH100F PH150F	PH300F48 PH300F110 PH300F280	PH300F24
2V		6.3V 1000μF		6.3V 2200μF	6.3V 4700μF	
3V	6.3V 470μF	6.3V 1000μF	6.3V 1000μF	6.3V 2200μF	6.3V 4700μF	
5V	10V 470μF	10V 1000μF	10V 1000μF	10V 1000μF	10V 2200μF	
12V	25V 220μF	25V 220μF	25V 470μF	25V 470μF	25V 1000μF	25V 1000μF
15V	25V 220μF	25V 220μF	25V 470μF	25V 470μF	25V 1000μF	
24V	35V 120μF	35V 120μF	35V 220μF	35V 220μF	35V 560μF	
28V	50V 100μF	50V 100μF	50V 220μF	50V 220μF	50V 470μF	50V 1000μF

Note)

- Use the capacitor of good temperature characteristics and with low impedance.
- Connect the capacitor to module output terminal with as short leads as possible.
- 3. Be aware of the ripple current tolerance of the capacitor.
- Using LXY series of Nippon Chemi-con or equivalent will meet design requirement in above 1 and 3.

# 3. PH-SERIES Parallel Operation

### **II** INTRODUCTION

PH series (F type only) equally shares current by connecting each PC terminal of power module in parallel.

There are 2 different parallel operations as follows.

#### (1) Parallel Operation

When load current can not be supplied by only a unit of power module, the output can be enhanced. Also, the reliability of the system can be improved to derate the output power.

#### (2) N+1 Parallel Redundant Operation

For power supply system required high reliability, it is possible to improve the reliability of the system by using N+1 units for load of N units.

In parallel operation with N+1 units, even though one of the power modules is failed, performance of the system can be maintained for the other units cover for the failure power module and share the load current.

# **2** PRECAUTION IN PARALLEL OPERATION

Basic cautions and warnings in parallel operation are as follows.

- Only F type power modules are applicable. Inhibit parallel operation on S type power modules.
- Available to use 11 units maximum in identical model (same output power and voltage.)
- Attach a common mode choke coil at input of each power module.
- Accuracy of output voltage adjustment shall be within ±1%.
- The maximum load current shall be less than 95% of nominal output current.
- Ground of PC terminal (signal ground) is -S terminal. Inhibit to use as power line.
- Use same length and size of output load wire between power modules in parallel operation and loads.
- If IOG and AUX terminals are used, read its explanation in the manual.
- When the distance between power modules is too long, current balance might get worse due to switching noise.
   As countermeasure, please connect a ceramic capacitor (0.01 to 0.1 uF) between PC and -S terminal of each power module.

# **B** PARALLEL OPERATION

 (a) Parallel connection to enhance the output and to improve the reliability




Figure3-1: Parallel Operation

(b) Parallel Operation programmed output voltage




Figure 3-2: Programmed Output Voltage

(c) Parallel Operation with adjustable output voltage




Figure 3-3: Parallel Operation with adjustable voltage

 (d) Parallel operation when the output voltage is adjusted by applying voltage externally




Figure 3-4: Parallel Operation which is possible to adjust output voltage by external applied voltage

ΡН

# **4** N+1 REDUNDANT OPERATION

### (a) N+1 Redundant connection




Figure 4-1: N+1 Redundant Operation

(b) Redundant Operation with programmed output voltage




Figure4-2: N+1 Redundant Operation with programmed output voltage

(c) Redundant operation with adjustable output voltage




Figure4-3: N+1 Redundant Operation with adjustable output voltage

(d) Redundant operation when the output voltage is adjusted by applying voltage externally




Figure4-4: N+1 Redundant Operation which is possible to adjust the output voltage by external applied voltage

Note) Please do sufficient evaluation on actual products when applying N+1 redundant or parallel operation.

### PH

# 4. Before You Think The Module is damaged

Confirm the following items before you think the module is damaged or failed.

- 1) No Output
  - Is the rated input voltage supplied?
  - Are the ON/OFF control terminal, remote sensing terminal, and output volatage trimming terminal connected correctly?
  - For adjusted output, is the variable resistor network set up and connected correctly?
  - Is there any troubles with the connected load?
- 2) High Output Voltage
  - Is the remote sensing connected correctly?
  - For adjusted output, is the variable resistor network set up and connected correctly?

- 3) Low Output Voltage
  - Is the rated input voltage supplied?
  - Is the remote sensing connected correctly?
  - Is it measured at sensing point?
  - For adjusted output, is the variable resistor network set up and connected correctly?
  - Is there any troubles with the connected load?
- 4) Over Load Regulation or Over Input Regulation
  - Is the rated input voltage supplied?
  - Are the input and output terminals connected correctly?
  - Is it measured at sensing point?
  - Are input and output wires too thin?
- 5) High Output Ripple
  - Is it same measuring meathod as the instruction manual?
  - Is the input ripple voltage within the specification?

# PH300S, 600S Series Instruction Manual

# **Before Using The Power Supply**

Pay attention to all warnings and cautions before using the unit. Incorrect usage could lead to an electrical shock, damage to unit, or fire hazard.

# 

- Do not touch heatsinks and case which may be hot.
- Confirm connections to input/output terminals and signal terminals are correct as indicated in instruction manual.
- Attach a fast blow type external fuse to each module to ensure safety operation and to acquire each safety standard approval.
- This power supply is designed for professional installation within an end user equipment.
- For PH300S48, use insulated voltage by reinforced insula-

tion at primary power supply or double insulation as input power source.


• The output from this power supply must be considered as an energy hazard (>240VA power and 2V voltage) and must not be accessible to a user. End equipment manufacturers must provide protection against inadvertent contact with the output terminal on this product by a service engineer or by the service engineer dropping a tool into them.

### Note: CE Marking

CE Marking, when applied to a product covered by this instruction manual, indicates compliance with the low voltage directive (73/23/EEC) as modified by the CE Marking Directive (93/68/EEC) which complies with EN60950.


# 1. Terminal Explanation

#### [Model PH300S]



[Input Side Terminals]
CNT: ON/OFF Control
-Vin: -input Terminal
+Vin: +input Terminal

### [Model PH600S]

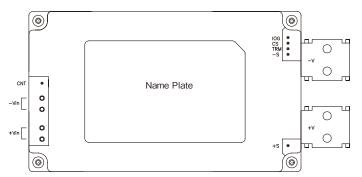

[Output Side Terminals]

IOG: Inverter Operation Good

CS: Output Current Monitoring Signal TRM: Output Voltage Trimming Terminal

−S: −Remote Sensing

-V: -Output Terminal

+V: +Output Terminal

+S: +Remote Sensing

Baseplate can be connected to FG through M3 mounting tapped holes. Connect +Vin, -Vin, +V, -V with consideration of contacting resistance.

# 2. Explanations on Specifications

# 11 Input Voltage Range

Input voltage ranges for PH300S, 600S series are as follow.

48VDC Input: 36 - 76VDC 280VDC Input: 200 - 400VDC

Input voltage normally includes ripple voltage (VrpI) as shown as Figure1-1. The ripple voltage shall be less than following values.

48VDC Input: 4Vp-p 280VDC Input: 20Vp-p

Peak of input voltage wave shall not be exceed above input voltage range.

Output voltage would be fluctuated as dynamic line changes

The output ripple voltage may become bigger if the bottom of input ripple voltage is below 220V for 280VDC input model and below 40VDC for 48VDC input model.





Figure 1-1 Ripple Voltage

Basic Connection

(PH300S)






Figure 1-2 Basic Connection

#### Input Fuse

No internal fuse is provided in the power module. To ensure the safety operation and to acquire safety standard approvals, attach an external fuse. The external fuse must be fast blow type and be attached to each module individually.

Furthermore, attach the fuse at +Vin side if the ground is -Vin side and at -Vin side if the ground is at +Vin side.

Use in-rush current limit circuit when the in-rush current may make troubles.

	300W	600W
48VDC Input	20A	_
280VDC Input	5A	10A

Table1-1 Recommended Rating Current of Input Fuse

#### C1:

Attach electrolytic capacitor(s) between +Vin and -Vin terminals

The capacitor shall be lower equivalence series resistance (ESR). Especially under low ambient temperature, the voltage of C1 becomes unstable due to ESR at line off. Hence, be aware the output might be not normal line off. Confirm the allowance of ripple current because ripple current flows in the capacitor, and then choose the capacitor.

**Recommended Capacitor Values** 

48VDC Input:  $470 \mu$  F 280VDC Input:  $22 \mu$  F

### L1:

To reduce C1 ripple current and output spike noise voltage, attach a normal choke coil to each module.

Recommended Inductance Values

48VDC Input:  $3 \mu$  H 280VDC Input:  $15 \mu$  H

**Recommended Current Ratings** 

PH300S48-\*: 11A PH300S280-\*: 2A PH600S280-\*: 4A

#### C2. C3: 4700pF

Use a ceramic capacitor that has high withstand voltage to reduce the output spike voltage.

48VDC Input: 1.5kVAC or above 280VDC Input: 3kVAC or above

Select the capacitor from the above recommended components with high withstand voltage because the test voltage is applied to the capacitor during the withstand voltage test in some application contents.

Connect C2 between +Vin and baseplate and C3 between -Vin and baseplate as short as possible.

#### C4: 2.2 µ F

Also, use a ceramic capacitor to reduce the output noise voltage.

Attach the ceramic capacitor between +V and -V where less than 50mm from output terminal for PH300S.

For PH600S, attach the ceramic capacitor between +V and -V terminal as short as possible.

The output spike noise voltage could be changed for design of printed circuit board.

#### C5:

Use electrolytic capacitor(s) for stable operation.

Attach the electrolytic capacitor between +V and -V where less than 50mm from output terminal for PH300S.

For PH600S, attach the electrolytic capacitor between +V and -V terminals as short as possible. Recommend tighten the screws of load wire and C5 together.

Oscillation waveform could be shown at dropping down the output for characteristics of equivalent series resistance (ESR) of electrolytic capacitor and equivalent series inductance (ESL).

Moreover, note the output ripple voltage could be changed for design of printed circuit board.

In case input/output dynamically changes, it helps the fluctuation of output voltage by increasing the external capacitor value.

Vo Wo	300S	6008	
3.3V	6.3V	6.3V	
3.34	4700μF	10000μF	
5V	10V	10V	
5 V	3900μF	4700μF	
12V	25V	25V	
120	1000μF	2200μF	
15V	25V	25V	
150	1000μF	2200μF	
24V	35V	35V	
241	560μF	1000μF	
28V	50V	50V	
26V	470μF	820μF	
48V	50V	50V	
40 V	*1 470µF × 2	*1 680µF × 2	

<sup>\*1</sup> For 48V output model, use two 50V capacitors in series that have low impedance.

Table1-2 C5: Recommended Values of External Output Capacitor

#### Remarks:

- Use an electrolytic capacitor that has excellent low impedance for temperature characteristic.
  - (Equivalent electrolytic capacitor in LXY series manufactured by Nippon Chemicon)
- Be aware of ripple current allowance of the electrolytic capacitor. Especially be aware it when the load current is in dynamics.

The output voltage may be greatly varied in 300Hz - 2kHz frequency range at 0% ←→100% of dynamic load condition. For less dynamic of the voltage, use a electrolytic capacitor which has better capacity than recommended electrolytic capacitor or keep the minimum load current more than 10% of nominal current.

Contact us for the details.

#### C6:

In between input source and input line of PH300S, 600S series there are a switch and connectors etc. In case that the switch is on/off or plug in/off when the input is applying, attach an electrolytic capacitor, C6 as shown as Figure 1-3.

Because in-rush current flows when the input is applied, confirm I<sup>2</sup>t for the switch and fuse.

#### Recommended Values

48VDC Input :  $100 - 470 \,\mu$  F 280VDC Input :  $10 - 47 \,\mu$  F




Figure 1-3 Input Filter with Input Switch

If plural numbers of module will be connected in PH300S, PH600S series, attach an electrolytic capacitor, C6 as shown as Figure1-4.

#### Recommended Values

48VDC Input : 100 - 470 μ F 280VDC Input :10 - 47 μ F




Figure 1-4 Input Filter when Plural Power Modules are connected.

#### **Reversed Connection of Input**

An error of reverse (+,-electrodes) input may cause of damage of the power module. If there is possibility to connect the module conversely by accident, it is necessary to attach a protective diode and an input fuse.


The rating voltage of the diode shall be higher than input voltage, and the maximum in-rush current shall be higher than fuse.



Figure 1-5 Protection for Reversed Connection of Input

# 2 Output Voltage Range

Output voltage can be adjusted within  $\pm 10\%$  (3.3V, 5V, 48V: -10% to +20%) of the nominal voltage by adjusting the external trimmer (variable resistor). However, if the output voltage become over the above range, OVP activates. There is a limit of input voltage shown in Figure 2-1 when the output voltage trims high.






Figure 2-1 Limit of Input Voltage

Connection method of external resistor (R1) and variable resistor (VR) is shown as follow.

	3.3V	5V	12V	15V	24V	28V	48V	
Variable	- 10%			± 10%				
Range	+ 20%				+ 20%			
R1	4.7k	4.7k	30k	33k	68k	68k	220k	
VR	2k	5k	5k	10k	10k	20k	30k	

External Resistor: below±5% Tolerance Variable Resistor: below±20% Tolerance below 1% of Remain

Table2-1 External Resistor and Variable Resistor Output  $-10\% \sim +20\%$  Variable (3.3V, 5V, 48V)

±10% Variable(12V, 15V, 24V, 28V)




Figure 2-2 Example Connection of External Resistance

For 48V output model, avoid to reduce the output voltage below -10% cause damage of the module

# **3** Maximum Output Ripple and Noise

Maximum output ripple and noise is measured by a method based on JEITA-9141.

The connection is shown as Figure3-1. Attach capacitors (C4: Ceramic Capacitor:  $2.2\,\mu\,\text{F}$ , C5: Electrolytic Capacitor: Refer to Table1-2) 50mm from the output for PH300S and as short as possible to the output terminal for PH600. Also, attach a coaxial cable with JEITA attachment at the both side of C4 capacitor shown as Figure3-1. Oscilloscope shall be used at a range of 100MHz bandwidth.

The output ripple voltage and the output spike noise voltage may be changed for the design of printed circuit board.




Figure 3-1 Measurement of Maximum Output Ripple & Noise (Example: PH300S)




Figure 3-2 Measurement of Maximum Output Ripple & Noise (Example : PH600S)

# 4 Maximum Line Regulation

The maximum output voltage changes when the input voltage is slowly varied within the range. (Steady state)

# 5 Maximum Load Regulation

The maximum output voltage changed when the output current is slowly varied within the range. (Steady state)

# **6** Over Current Protection (OCP)

OCP function is provided in the power module.

When short or overload condition is released, the output will be automatically recovered. This setting value is fixed and impossible to change externally.

Be aware that the power module could be damaged in some thermal conditions when short or overloaded condition is continuously carried on.

# 7 Over Voltage Protection (OVP)

OVP function is provided in the power module.

This setting value is a value for the nominal output voltage. It is fixed and impossible to change externally.

When OVP function activates, the output will shut down. The output can be recovered by reset of ON/OFF Control terminal to low at once or reapplying input after input voltage bring down to less than the following values. Time reset of ON/OFF control terminal is more than 100ms.

To check OVP function, apply an external voltage that is limited to upper limit of maximum OVP range. Refer to specification for OVP range. Avoid to apply over voltage not to damage the unit.

Input Voltage to release OVP

48V Input: less than 25VDC 280V Input: less than 150VDC

### Thermal Protection

Thermal protection is provided in the power module. It prohibits abnormal rise of ambient temperature and internal temperature of power supply, and the output will shut down. Trip point of thermal protection is 105°C - 130°C of baseplate temperature.

The output is recovered by reapplying the input voltage after the input shut down (same as OVP) when the temperature is cooled down enough or resetting ON/OFF control terminal.

# Remote Sensing (+S,-S Terminal)

Remote sensing which compensates voltage drop by wiring from output terminal to load terminal in power supply is equipped.

If remote sensing is unnecessary to use (using local sensing), directly connect +S and +V terminals and -S and -V terminals as short as possible.

Use within the maximum output power range with either compensated voltage range of line drop (voltage drop by wiring) is in output range or voltage between -V and -S is 2V. Also, reduce noise affects by using shielded wire, twisted wire, or parallel pattern as remote sensing wire.




Figure9-1 Remote Sensing at Use




Figure9-2 Remote Sensing Not in Use

# **M** ON/OFF Control (CNT Terminal)

Without turning the input on and off, the output can be enabled and disabled by CNT function. The control circuit is at input (primary) side, and CNT terminal pin is used. Use -Vin terminal as ground of CNT terminal.

If this function is unnecessary, shorten between CNT terminal and -Vin terminal.

- 1) Maximum applied voltage to CNT terminal is 35V, and the maximum reversed voltage is -0.7V. Also, the current source of CNT terminal is approximately 0.5mA. Contact  $0.1\mu\mathrm{F}$  capacitor in between CNT and -Vin terminals as short as possible if lead wires are much longer.
- CNT terminal can be managed by opening and closing the contact of a switch or relay and ON/OFF control of photo coupler.

Insulate the ON/OFF control circuit by relay or photo coupler.

\*In use of photo coupler, connect the transistor side between CNT and -Vin as short as possible.




Figure 10-1 Connection of CNT Terminal

CNT Level	Output Status
H (over 4V) or Open	OFF
L (below 0.8V) or Short	ON

Table10-1 ON/OFF Control Mode

#### - Caution -

Inside of power module could be damaged at applying input without or improper contact of -V connection. For an example, the current flows in abnormal path such as +Vin to CNT terminal leads CNT terminal blow out

To avoid such a damage, ensure all the terminals are connected before input is applied.

# CS Signal (CS)

Negative voltage based on -Vo is generated for CS terminal. Using this signal, it is possible to operate in parallel by attaching parallel operating control circuit externally.

Refer to "Parallel Operation" Application Note in the instruction manual for details.

# **12** Series Operation

Series operation is available for all models of PH300S, 600S series.

Contact us for details of the maximum unit number of possible connections.




Figure 12-1 Series Operation in High Output Voltage




Figure12-2 ±Output Series Operation

# **I**I.O.G. Signal (IOG Terminal)

Using IOG (Inverter Output Good Signal) terminal, it is possible to monitoring good/not good operation in the power module. This monitoring signal is located at secondary (output) side and is the open collector output.

At normal inverter operation, the IOG shows LOW (maximum sink current 5mA and maximum applied voltage 35V).

Ground of IOG terminal is -S terminal.

Be aware IOG signal could be unstable in the following cases.

- Active OCP
- Low load in parallel operation
- Sudden change of load

Contact us for the details.

# Operating Temperature

Installation direction is freely chosen, but consider air convection not to shut heat up in power module. Decide installation direction of printed circuit board and dispositions of components for better air convection in both forced air or convection cooling.

To keep the baselate temperature below 100 °C in actual

operation, it is possible to operate. Note the output derating is necessary in case that the baseplate temperature is over 90°C for PH300S and over 85°C for PH600S.

Refer to "Thermal Design" in Application Notes in the instruction manual for details.

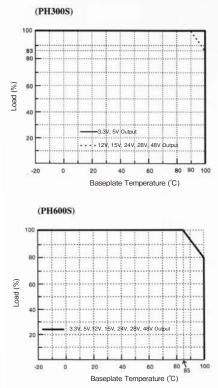



Figure14-1Output Derating Curve

- Load rate (%) is expressed as higher rate for maximum output power or maximum output current.
- Maximum baseplate temperature is 100°C. Confirm it at the measuring point shown as Figure14-2 in the worst operating condition.

(PH300S)






Figure 14-2 Temperature Measurement Point of Baseplate

Recommend to use the baseplate temperature to derate for better improvement of converter reliability.

# **E** Operating Humidity

Note built-up condensation may cause of abnormal operation or damage of the power module.

# **16** Storage Temperature

Note that radical temperature changes can be a cause of condensation and affect other harmful problems to each terminal soldering.

# **17** Storage Humidity

To storage under high temperature and humidity conditions, it makes each terminal oxidize. Hence, the quality of the soldering would be worse.

# **18** Cooling Method

Various cooling method can be used since the operating temperature is specified by baseplate temperature.

Refer to "Thermal Design" in Application Notes in the instruction manual for details in of thermal design.

# Baseplate Temperature vs. Output Regulation

Output voltage ratio is the ratio when only operating baseplate temperature changes.


# 20 Withstand Voltage

The power module is designed to withstand 2.5kVAC for input - baseplate and 3kVAC for input - output (1.5kVAC for input - baseplate and 1.5kVAC for input - output for 48VDC input model) for 1 minute. Set up the limit value of withstand voltage tester as 20mA in case of incoming goods test and so on.

Also, it is designed to withstand 500VDC for output - baseplate for 1 minute. The applied voltage must be direct voltage. In a test with alternating voltage, the power module will be damaged, therefore, do not test with alternating voltage.

Do not apply the test voltage from the beginning. It shall be gradually increased from zero and also be gradually decreased for shut down. Especially using withstand voltage with timer, impulse several times as the applied voltage occurs when the switch is off by the timer, and the power module would be damaged.


Shorten at the output side as shown in the following drawing



2.5kVAC 1 minute (20mA) (48VDC Input Model: 1.5kVAC)

Figure 20-1 Withstand Voltage Test for Input - Baseplate

PH300S, 600S TDK·Lambda



3kVAC 1 minute (20mA) (48VDC Input Model: 1.5kVAC)

Figure 20-2 Withstand Voltage Test for Input - Baseplate





Figure 20-3 Withstand Voltage Test for Output - Baseplate

Test must be curried out with direct current.

# 21 Isolation Resistance

Use DC isolation tester (MAX. 500V) to measure the isolation resistance between output and baseplate. The isolation resistance is more than 100M $\Omega$  at 500VDC. Note that some isolation testers would make high voltage pulse occur when the applied voltage is varied. Ensure the tester fully discharge after the test.



Over 100M Oat 500VDC

Figure21-1 Isolation Test

### Vibration

Refer to "Installation Application Notes" in the instruction man-

# 28 Shock

Value is for conditions of our shipping.

### 24 Others

The performance of a system with Power Module is influenced according to various conditions -- PCBs, chassis, mechanics, heat dissipation. Please evaluate actual products, and confirm its performance. (For details, please refer Power Module Application Note.)

 Please refer to "Power Module Application Note" for thermal design and mounting direction.

# 4. Before You Think The Module is damaged

Confirm the following items before you think the module is damaged or failed.

- 1) No Output
  - Is the rated input voltage supplied?
  - Is the remote sensing terminal connected correctly?
  - Is the ON/OFF control terminal connected correctly?
  - For adjusted output, is the variable resistance network set up and connected correctly?
  - Is there any trouble with the connected load?
- 2) High Output Voltage
  - Is the remote sensing connected correctly?
  - For adjusted output, is the variable resistance network set up and connected correctly?

- 3) Low Output Voltage
  - Is the rated input voltage supplied?
  - Is the remote sensing terminal connected correctly?
  - Is it measured at sensing point?
  - For adjusted output, is the variable resistance network set up and connected correctly?
  - Is there any trouble with the connected load?
- 4) Over Load Regulation or Over Input Regulation
  - Is the rated input voltage supplied?
  - Are the input and output terminals connected correctly?
  - Is it measured at sensing point?
  - Are input and output wires too thin?
- 5) High Output Ripple
  - Is it same measuring method as the instruction manual?
  - Is the input ripple voltage within the specification?

# 3. PH300S, 600S Parallel Operation

### II INTORDUCTION

PH300S, 600S series are applicable to operate in parallel with an external circuit using CS signal terminal. There are 2 different kinds of parallel operation.

#### (1) Parallel Operation

It is possible to enhance the output when load current can not be supplied by only one power module or to improve the reliability by derating the output power of each module.

#### (2) N+1 Parallel Redundant Operation

For power supply that is required high reliability, it is possible to achieve the requirement by using N+1 units of power modules for the load of N units.

In N+1 units of parallel operation, even through one of the power modules is failed the performance of the system shall be maintained because the other units cover the failure module and share the load currents.


### 2 PRECUATIONS

There are several basic cautions and warnings in parallel operation of PH300S, 600S series.

- Externally attach a control circuit of parallel operation in each power module.
- Available to use 11 units maximum of power modules in identical model (same output power and voltage.)
- Use specified components followed by explanations of basic connection in Instruction Manual at input and output side.
- Set the accuracy of the output voltage within ±1% to adjust the output voltage.
- Set the maximum load current below 95% of sum of the nominal output current values.
- Use same length and size of output load lines between power module and load in parallel connection.

### **3** CONNECTION CIRCUIT OF PARALLEL OPEARTION

(a) Basic Connection Circuit of Parallel Operation

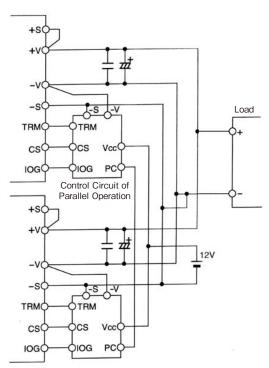

Control Circuit of Parallel Operation

Figure3-1 Basic Connection Circuit of Parallel Operation Basic circuit connection is shown in Figure3-1. For control circuit of parallel operation, individually connect a circuit shown in Figure3-2 to each PH300S, 600S series of power module of parallel operation.

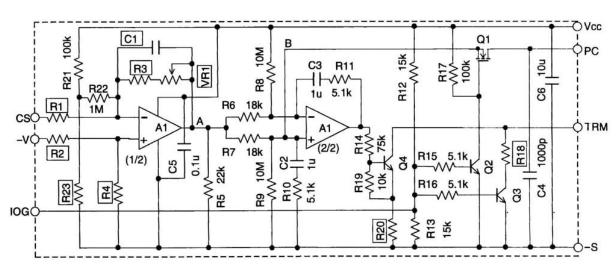


Figure 3-2 Control Circuit fo Parallel Operation

(1) Parallel Operation

In case that the output of PH modules are connected in parallel without control circuit of parallel operation, current starts to flow from a power module with higher output voltage as increasing the load current. This state may be continued until the output voltage drops to be equal to the other modules by dynamic load or descending voltage in load wire or high output module becomes over current protection condition and output voltage decreases. Do not operate in such conditions because the load may be unbalanced and charges to only one power module.

To attach control circuits of parallel operation, the load current in each power module can be monitored, and the output voltage of modules with less load current may be increased. Then the load current may be balanced.

#### (2) Terminal Explanation of Figure 3-2

(b) Control Circuit of Parallel Operation

#### CS

CS terminal of each module shall be connected. Shorten a wire length from CS terminal to A1 input terminal as much as possible to avoid noise affects. Unavoidably the wire is long, then attach a capacitor (approx. 1mF) between CS terminal and -V terminal.

Negative voltage is generated at CS terminal in proportion to the output current. Figure 3-3 shows an example of characteristics of CS terminal voltage (when CS terminal is opened). Under full load condition CS terminal voltage may be approximately -20mV to -60mV based on -V terminal (-100mV to -300mV for 28V, 48V output model).


CS terminal voltage can be expressed as  $Vcs = -R_i \times I_0$  by descend of internal voltage of power module.

Ri: Components of Resistor at internal output side of PH module

#### Io: Output Current of PH module

Temperature coefficient of R<sub>i</sub> is almost same resistance rate of copper and approximately 4000 ppm/°C.

For CS terminal voltage is a small voltage in negative polarity, Op-Amp A1 (1/2) is amplifier inverting shown as Figure 3-2. For all of PH modules to be in parallel operation, VR1 shall be adjusted to equalize with the voltage at A point at full load. Setting voltage of A point is 3V to 5V, and the setting accuracy is within ±2%. Voltage adjustment of A point can be adjusted with PC terminal of open circuit.



Output Current(%) Figure 3-3 Characteristics of Output Current vs. CS Terminal Voltage (Example: PH300S48-5)

It is signal ground of CS terminal voltage. Apart from the wire to the load, it shall be connected near output terminal. Equalize connection method and disposition to -V terminal in each module.




Figure 3-4 - V Wiring Example

#### IOG

IOG terminal in each module shall be connected. IOG terminal in PH module generates LOW output with open collector output at normal operation. In control circuit of parallel operation, connection of PC terminal would be cut off by turning off MOSFET Q1 to use redundant operation when IOG terminal of PH module abnormally generates HIGH output.

#### Vcc

It is power supplement terminal to control circuit of parallel operation. Connect 12±1V of stable DC power supply between -S terminal and Vcc terminal. Control circuit of parallel operation in out of the above Vcc voltage range may cause mis-operation such as unstable load balance.

For models more than 12V output voltage, Vcc can be supplied by +V shown in Figure 3-5. Current consumption per module in control circuit of parallel operation is approximately 10mA. Attach a capacitor (C6: 10mF) for bypass noise of power supply between Vcc terminal and -S terminal in each control circuit of parallel operation.

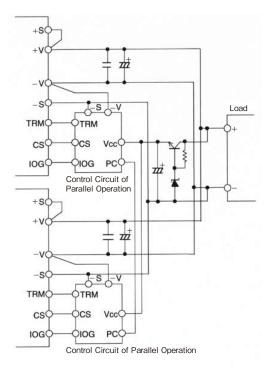


Figure 3-5 Example: Vcc is supplied by +V

#### PC

It is control terminal for parallel operation. It is connected in all of PH modules in parallel operation. Shorten a wire between PC terminals as much as possible. Unavoidably the wire is long, then use twisted pair wire or shielded wire to avoid noise affects.

When PC terminals in parallel operation are mutually connected, voltage of all PC terminal is the average of PC terminals at open circuit. +Input side of internal Op-Amp A1(2/2) of parallel operation in proportion to the output current in the module is supplied. At -input, voltage in proportion to average of total output currents of all the module is supplied. This Op-Amp makes output voltage of PH modeles with less output current risen by TRM terminal and activates output current in PH module balance.

#### TRM

TRM terminal in each PH module is connected. Connecting TRM terminal, control circuit of parallel operation adjusts the output voltage of the module and balance the output current.

#### -S

It is GND level of control circuit of parallel operation. Internal circuit activates based on -S. It shall be connected to -S terminal of PH module. -S connection between modules is to be connected one point of earth to avoid electrical potential difference of each -S terminal of PH module by voltage drop due to output current.

### (3) Component Selection

Refer to following items to select components in control circuit of parallel operation

#### Op-Amp (A1)

Use an Op-Amp which has singular power operation and its input common mode voltage range from OV. Moreover, it shall be low input off set voltage. For an example, uPC842C(NEC) is one of available Op-Amp.

#### Transistor • FET (Q1-Q3)

FET (Q1) uses as analog switch. Use N channel small signal MOS-FET for general purpose (rated more than 25V, 50mA.)

Use NPN small signal type for transistor (Q2-Q4) (rated more than 25V, 50mA.)

### Capacitor (C1-C6)

For choosing capacitor(s), refer to values expressed in Figure 3-2 and values for each component shown in Table 3-2. Use film capacitor or ceramic capacitor which has good temperature characteristics.

The tolerance shall be less than  $\pm 5\%$ .

#### Resistor (R1-R23, VR1)

For choosing capacitor(s), refer to values expressed in Figure 3-2 and values for each component shown in Table 3-2. The tolerance shall be less than  $\pm 5\%$ .

#### Values for each Component

Values of Capacitor C1, Resistor R1-R4, R18, R20, R23, and Variable Resistor VR1 depend on model. Refer to Table3-1 for components in PH300S280-\*and Table3-2 for components in PH600S280-\*.

#### PH300S280, PH30048

	3.3V	5V	12V	15V	24V	28V	48V
C1	1000p	1000p	1000p	330p	330p	1000p	330p
R1	1.2k	1.2k	1.2k	2.7k	5.1k	7.5k	10k
R2	1.2k	1.2k	1.2k	2.7k	5.1k	7.5k	10k
R3	150k	150k	300k	430k	750k	470k	750k
R4	180k	180k	360k	470k	820k	510k	820k
R18	9.1k	30k	30k	30k	30k	30k	30k
R20	5.6k	12k	15k	15k	15k	15k	15k
R23	18k	18k	11k	4.7k	2.4k	1.8k	360k
VR1	50k	50k	100k	100k	200k	100k	200k

Table3-1 PH300S280, PH300S48

Values for components in Control

Circuit of Parallel Operation

#### PH600S280

3.3V	5V	12V	15V	24V	28V	48V
1000p	1000p	1000p	330p	330p	1000p	1000p
1.2k	1.2k	1.2k	2.7k	5.1k	7.5k	10k
1.2k	1.2k	1.2k	2.7k	5.1k	7.5k	10k
180k	180k	220k	360k	510k	200k	390k
200k	200k	270k	390k	560k	240k	430k
9.1k	30k	30k	30k	30k	30k	30k
5.6k	12k	15k	15k	15k	15k	15k
18k	18k	11k	4.7k	2.4k	1.8k	360k
50k	50k	100k	100k	200k	100k	100k
	1000p 1.2k 1.2k 180k 200k 9.1k 5.6k 18k	1000p 1000p 1.2k 1.2k 1.2k 1.2k 180k 180k 200k 200k 9.1k 30k 5.6k 12k 18k 18k	1000p 1000p 1000p 1.2k 1.2k 1.2k 1.2k 1.2k 1.2k 180k 180k 220k 200k 200k 270k 9.1k 30k 30k 5.6k 12k 15k 18k 18k 11k	1000p         1000p         1000p         330p           1.2k         1.2k         1.2k         2.7k           1.2k         1.2k         1.2k         2.7k           180k         180k         220k         360k           200k         200k         270k         390k           9.1k         30k         30k         30k           5.6k         12k         15k         15k           18k         18k         11k         4.7k	1000p         1000p         1000p         330p         330p           1.2k         1.2k         1.2k         2.7k         5.1k           1.2k         1.2k         1.2k         2.7k         5.1k           180k         180k         220k         360k         510k           200k         200k         270k         390k         560k           9.1k         30k         30k         30k         30k           5.6k         12k         15k         15k         15k           18k         18k         11k         4.7k         2.4k	1000p         1000p         1000p         330p         330p         1000p           1.2k         1.2k         1.2k         2.7k         5.1k         7.5k           1.2k         1.2k         1.2k         5.1k         7.5k           180k         180k         220k         360k         510k         200k           200k         200k         270k         390k         560k         240k           9.1k         30k         30k         30k         30k           5.6k         12k         15k         15k         15k         15k           18k         18k         11k         4.7k         2.4k         1.8k

Table 3-2 PH600S280

Values for components in Control
Circuit of Parallel Operation

unit : C[F], R[ $\Omega$ ]

#### Others

Values of capacitors and resistors are recommended values to operate power modules which have components used in basic connection shown in Application Note. These values may sometimes differ from the optimum values because of components at input and output side and wiring environment. Confirm the performance of the circuit using actual module when each value is determined.


# **4** Cautions for Wiring

Wiring from Input of A1 (1/2) to CS and -V terminals shall be minimum length. Be aware of noise affects for A1 (1/2) which makes small voltage amplify tens to hundreds times. Also, load wire to united point of each load wire from output of the power supply shall be minimum length too. Long wiring can cause mis-operation of control circuit of parallel operation. Unavoidably the wire is long, then attach an approx. 1mF capacitor between -V terminal and -S terminal.

If -S wiring is close by and parallel to load wire, use shielded wire or twisted pair wire to connect -S to -V and also -S itself. Without any measure, electrode of -S may be unstable by influences of load wire and mis-operation may be occurred.

# 5 Parallel Operation

(a) Parallel operation to enhance the output and to improve the reliability

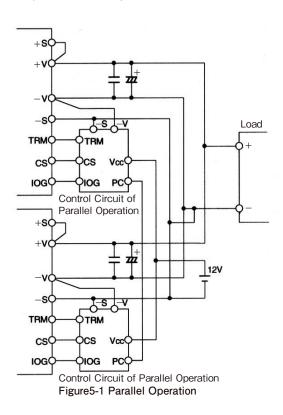

(b) Parallel Operation programmed output voltage

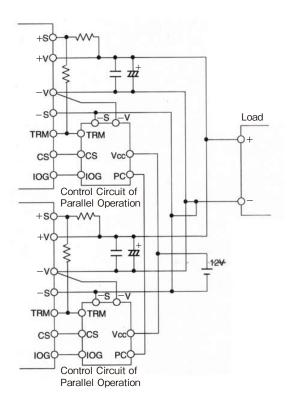


Figure 5-2 Parallel Operation at programmed ouput voltage

(c) Parallel Operation with adjustable output voltage

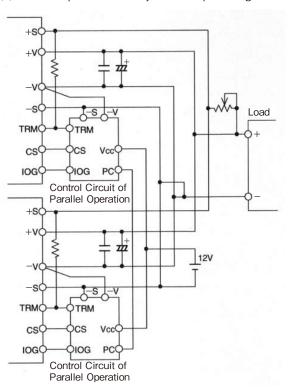


Figure5-3 Parallel Operation with adjustable output voltage

# 6 N+1 Redundant Operation

(a) N+1 Redundant Operation

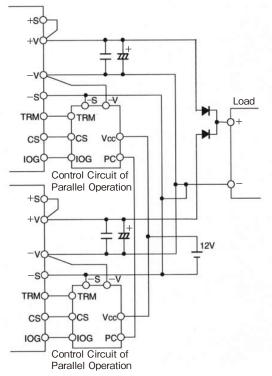


Figure 6-1 N+1 Redundant Operation

PH300S, 600S TDK·Lambda

(b) Connection of N+1 Redundant Operation at programmed output voltage within the range

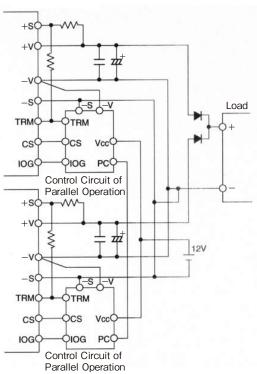


Figure6-2 N+1 Redundant Operation at programmed output voltage (fixed)

(c) N+1 Redundant Operation with adjustable output voltage

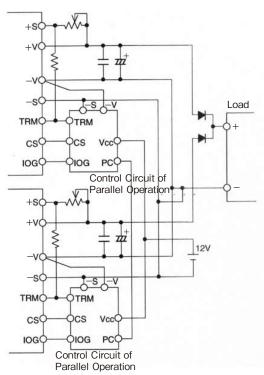


Figure 6-3 N+1 Redundant Operation with adjustable output voltage

