


COIL: @ 25°C	
RESISTANCE	75 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.5 VDC
MUST RELEASE	0.9 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE & RELEASE 10 MS MAX. CONTACT BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

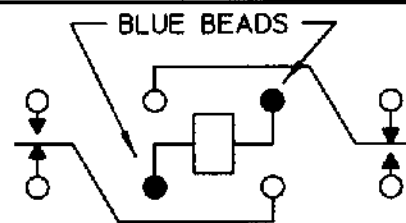

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC  
RESISTIVE 100,000 OPERATIONS

DR. B.D. 6/16/99 CK. GqH 6-16-99



CUST. C. I. I. STD  
CUST. NO. \_\_\_\_\_ REV. \_\_\_\_\_

\*07\* RELAY

B07A112BB1