

SPECIFICATION

Device Name : IGBT Module

Type Name : 7MBR100SB060-01

Spec. No. : MS6M 0553

Date : Jun. - 02 - 2000

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.


Fuji Electric Co., Ltd.
Matsumoto Factory

	DATE	NAME	APPROVED	Fuji Electric Co., Ltd.		
DRAWN	Jun. - 2 - 00	<i>J. Kobayashi</i>	<i>J. Kobayashi</i>	DWG. NO.	MS6M 0553	1 / 10
CHECKED	June - 2 - 00	<i>S. Arita</i>				

H04-004-05


7MBR100SB060-01

1. Outline Drawing (Unit : mm)

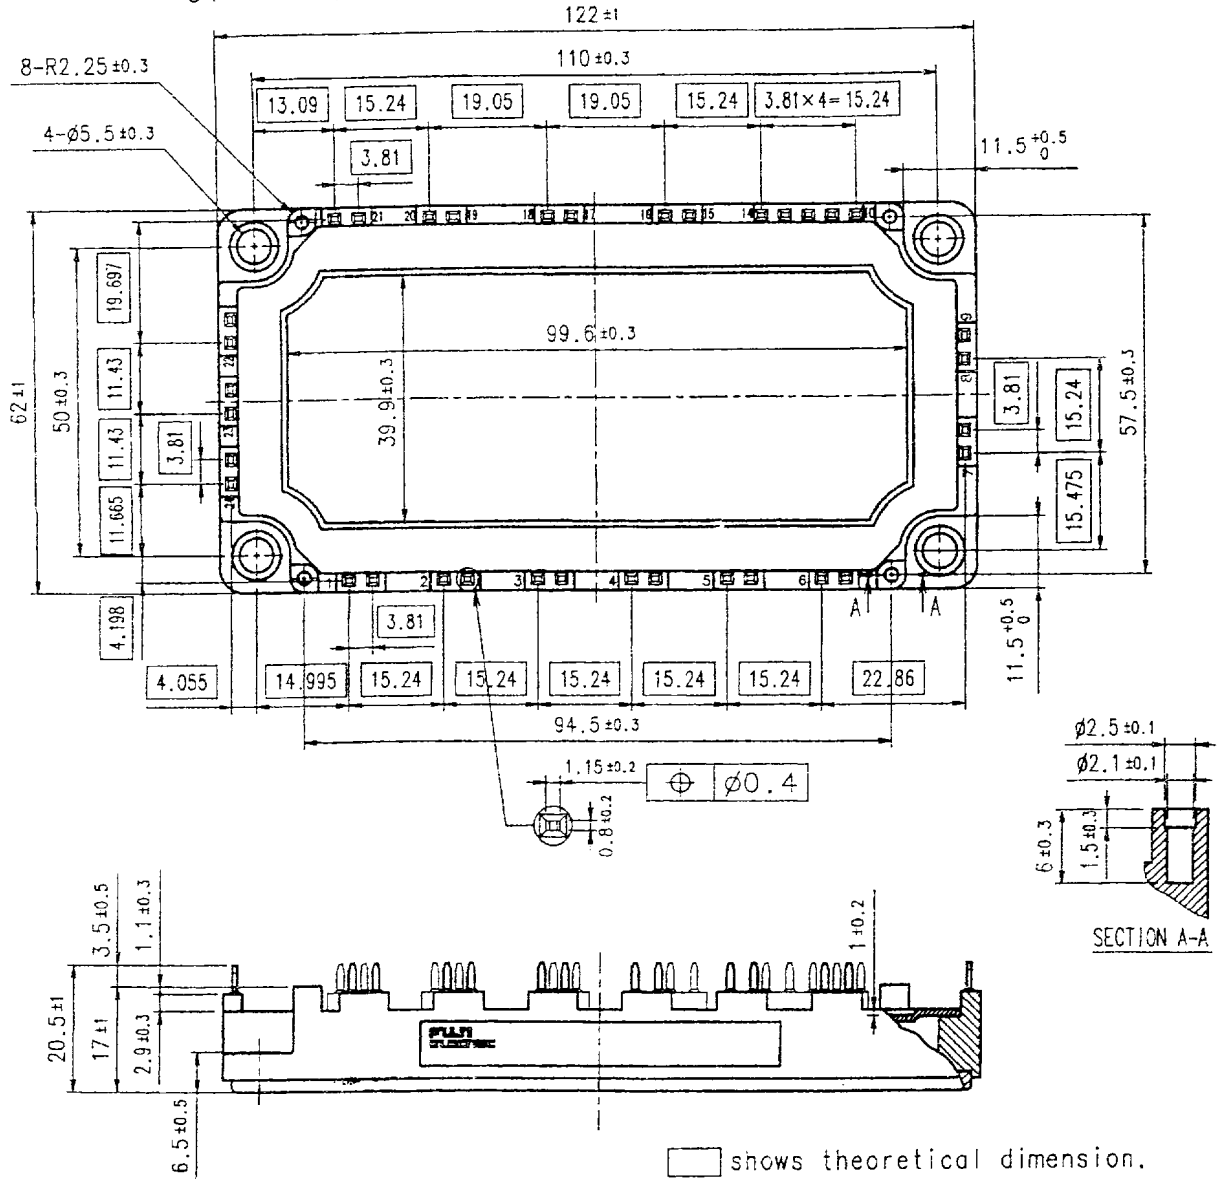

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

2. Equivalent circuit

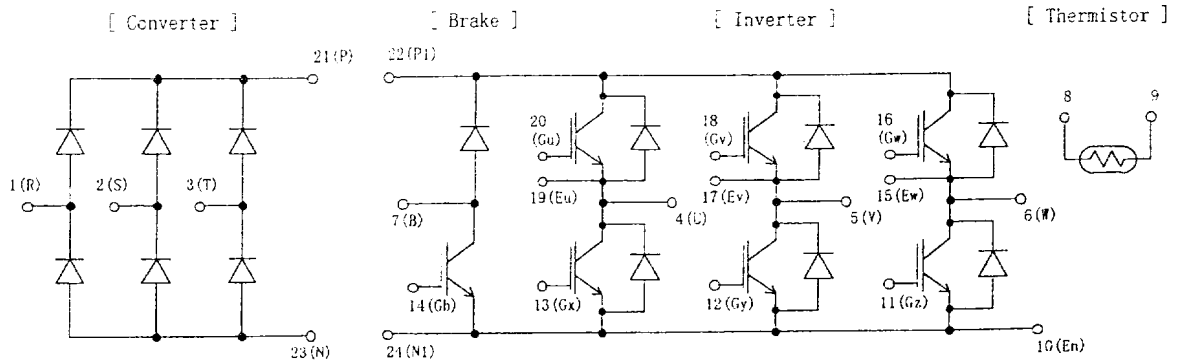

Fuji Electric Co., Ltd.

DWG.NO.

MS6M 0553

3/10

H04-004-03

3. Absolute Maximum Ratings (at Tc= 25C unless otherwise specified)

Items		Symbols	Conditions	Maximum Ratings	Units
Inverter	Collector-Emitter voltage	V _{CES}		600	V
	Gate-Emitter voltage	V _{GES}		+20	V
	Collector current	I _c	Continuous	100	A
		I _{cp}	1ms	200	A
		-I _c		100	A
Collector Power Dissipation	P _c	1 device	400	W	
Brake	Collector-Emitter voltage	V _{CES}		600	V
	Gate-Emitter voltage	V _{GES}		+20	V
	Collector current	I _c	Continuous	50	A
		I _{cp}	1ms	100	A
	Collector Power Dissipation	P _c	1 device	200	W
Repetitive peak reverse Voltage(Diode)	V _{RRM}		600	V	
Converter	Repetitive peak reverse Voltage	V _{RRM}		800	V
	Average Output Current	I _o	50Hz/60Hz sine wave	100	A
	Surge Current (Non-Repetitive)	I _{FSM}	T _j =150C,10ms	700	A
	I ² t (Non-Repetitive)	I ² t	half sine wave	2450	A ² s
Junction temperature	T _j		150	C	
Storage temperature	T _{stg}		-40~ +125	C	
Isolation voltage	between terminal and copper base ^(*)	Viso	AC : 1min.	2500	V
	between thermistor and others ^(*)			2500	V
Mounting Screw Torque ^(*)				3.5	Nm

(*1) All terminals should be connected together when isolation test will be done.

(*2) Terminal 8 and 9 should be connected together. Terminal 1 to 7 and 10 to 24 should be connected together and shorted to copper base.

(*3) Recommendable Value : 2.5~3.5 Nm (M5)

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Fuji Electric Co.,Ltd.

DWG.NO.

MS6M 0553

4 / 10

H04-004-03

4. Electrical characteristics (at Tj= 25C unless otherwise specified)

Items	Symbols	Conditions	Characteristics			Units		
			min.	typ.	Max.			
Inverter	Zero gate voltage Collector current	ICES	VGE 0 V, VCE 600 V			1.0	mA	
	Gate-Emitter leakage current	IGES	VCE 0 V, VGE +-20 V			200	nA	
	Gate-Emitter threshold voltage	VGE(th)	VCE 20 V, Ic = 100 m	5.5	7.8	8.5	V	
	Collector-Emitter saturation voltage	VCE(sat)	VGE 15 V, chip		1.8			V
			Ic = 100 A terminal		2.15	2.6		
	Input capacitance	Cies	VGE 0 V, VCE 10 V f = 1 MHz		10000			pF
	Turn-on time	ton	Vcc= 300 V		0.45	1.2		us
		tr	Ic = 100 A		0.25	0.6		
		tr(0)	VGE +-15 V		0.08			
	Turn-off time	toff	RG = 24 ohm		0.40	1.0		us
		tf			0.05	0.35		
	Forward on voltage	VF	IF = 100 A chip		1.6			V
terminal				1.95	2.7			
Reverse recovery time	trr	IF = 100 A			300		ns	
Brake	Zero gate voltage Collector current	ICES	VGE 0 V, VCE 600 V			1.0	mA	
	Gate-Emitter leakage current	IGES	VCE 0 V, VGE +-20 V			200	nA	
	Collector-Emitter saturation voltage	VCE(sat)	VGE 15 V, chip		1.8			V
			Ic = 50 A terminal		2.05	2.5		
	Turn-on time	ton	Vcc= 300 V		0.45	1.2		us
		tr	Ic = 50 A		0.25	0.6		
	Turn-off time	toff	VGE +-15 V		0.40	1.0		us
		tf	RG = 51 ohm		0.05	0.35		
	Reverse current	IRRM	VR = 600 V			1.0		mA
	Converter	Forward on voltage	VFM	IF = 100 A chip		1.1		V
				terminal		1.2	1.5	
	Reverse current	IRRM	VR = 800 V			1.0		mA
Thermistor	Resistance	R	T = 25C		5000		ohm	
			T =100C	465	495	520		
B value	B	T = 25/50C	3305	3375	3450		K	

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

5. Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	Max.	
Thermal resistance (1 device)	Rth(j-c)	Inverter IGBT			0.31	C/W
		Inverter FWD			0.70	
		Brake IGBT			0.63	
		Converter Diode			0.47	
Contact Thermal resistance	Rth(c-f)	with Thermal Compound (*)		0.05		C/W

* This is the value which is defined mounting on the additional cooling fin with thermal compound.

Fuji Electric Co.,Ltd.


DWG.NO

MS6M 0553

5 / 10

H04-004-03

6. Indication on module

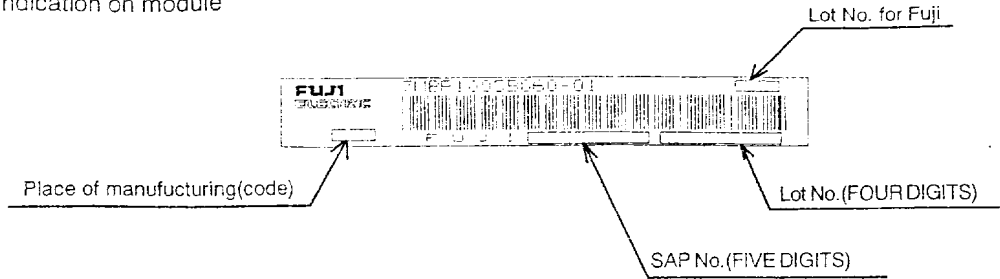

7. Applicable category


This specification is applied to Power Integrated Module named 7MBR100SB060-01.

8. Storage and transportation notes

- The module should be stored at a standard temperature of 5 to 35°C and humidity of 45 to 75% .
- Store modules in a place with few temperature changes in order to avoid condensation on the module surface.
- Avoid exposure to corrosive gases and dust.
- Avoid excessive external force on the module.
- Store modules with unprocessed terminals.
- Do not drop or otherwise shock the modules when transporting.
- Please connect adequate fuse or protector of circuit between three-phase line and this product to prevent the equipment from causing secondary destruction.

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

9. Definitions of switching time

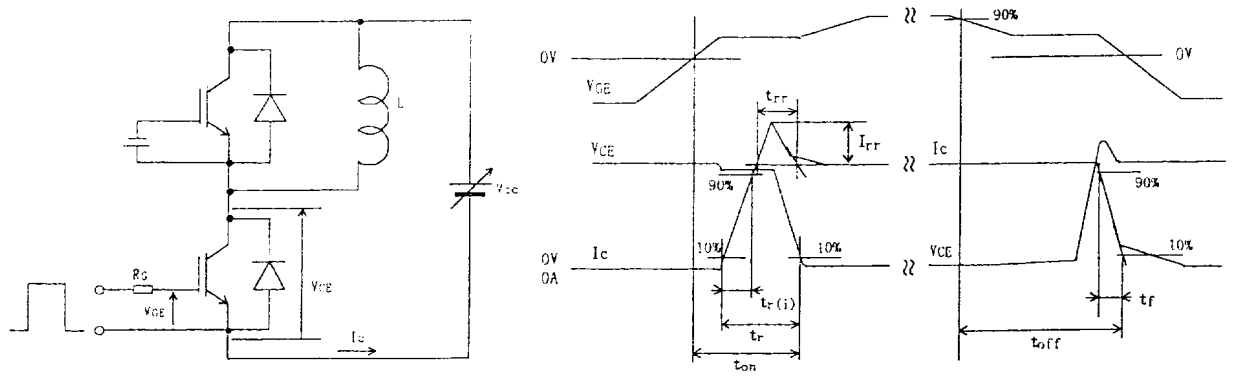

Fuji Electric Co.,Ltd.







DWG.NO.

MS6M 0553

6 / 10

H04-004-03

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

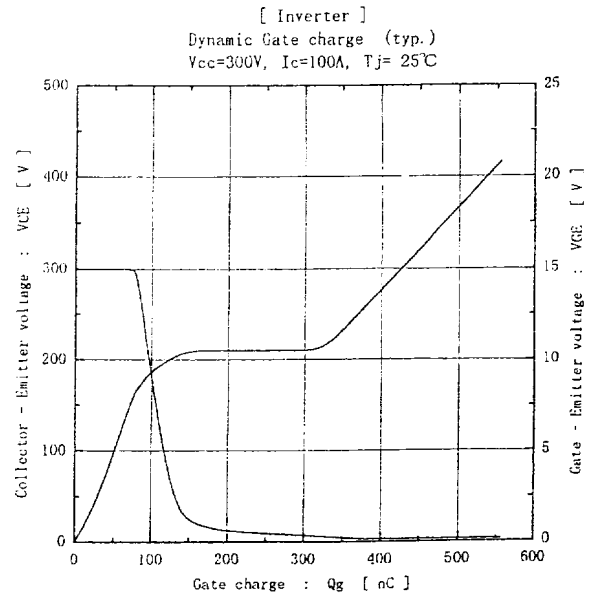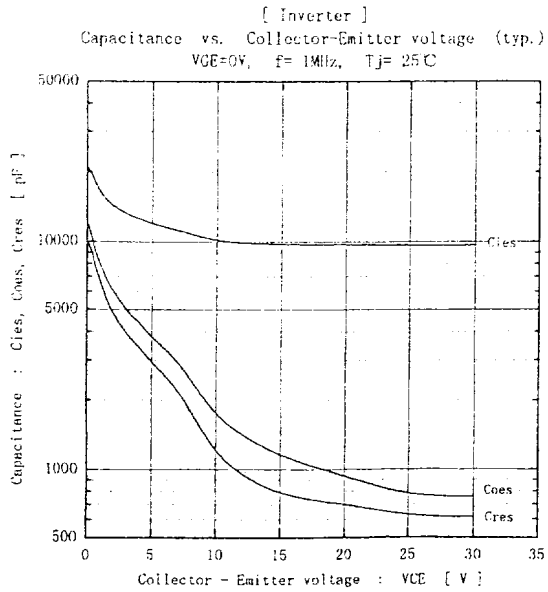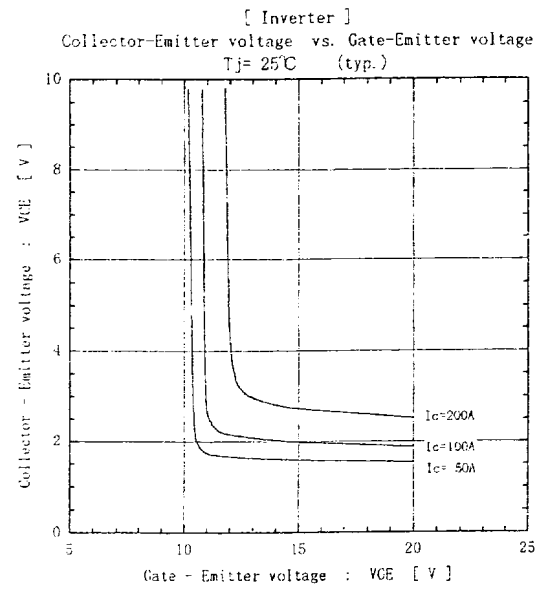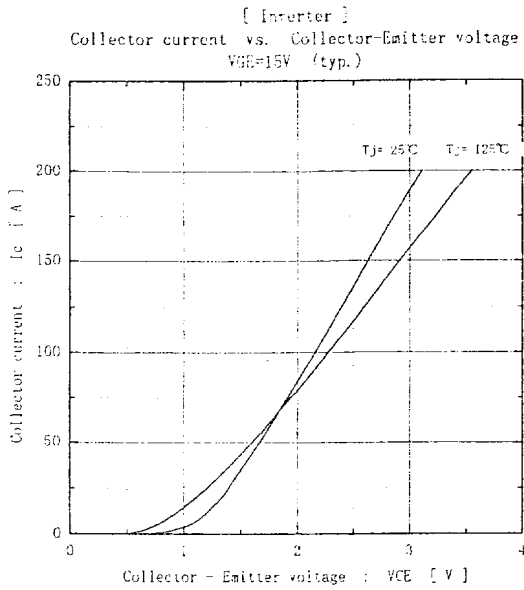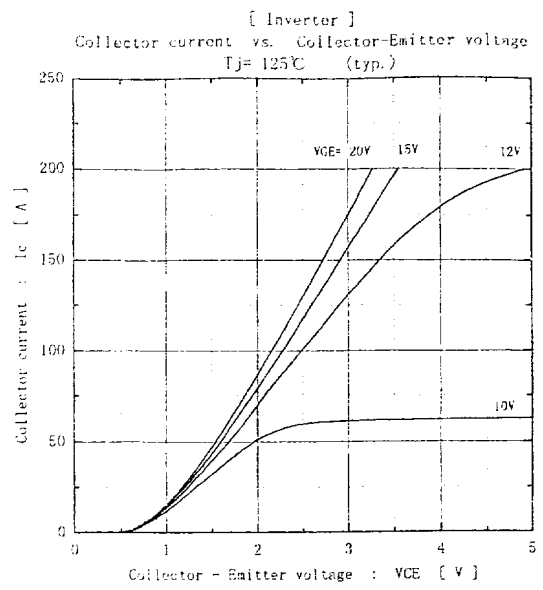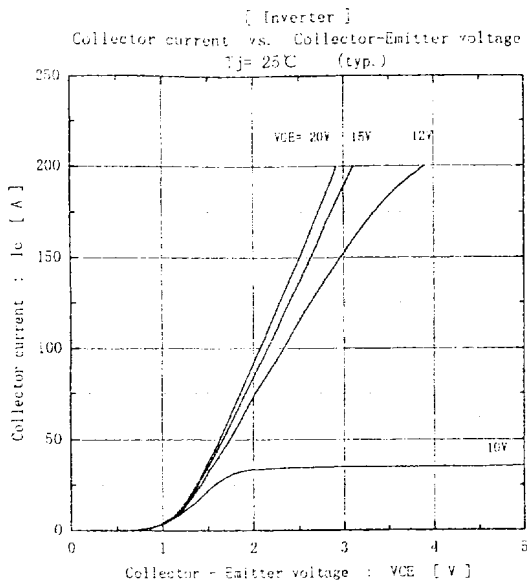

Fuji Electric Co., Ltd.







DWG. NO.

MS6M 0553

7 / 10

H04-004-03

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

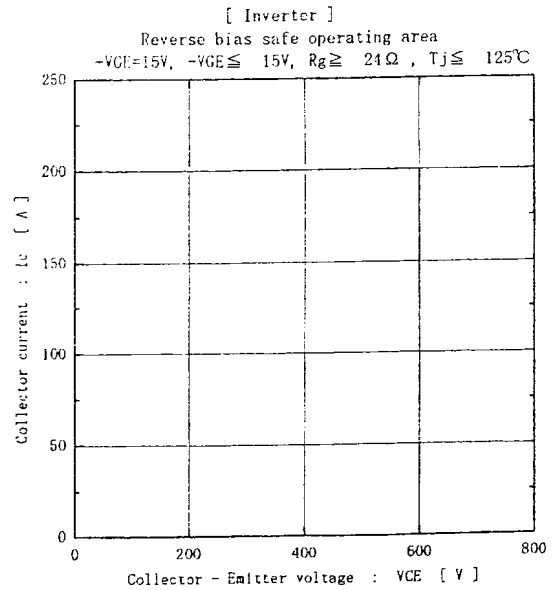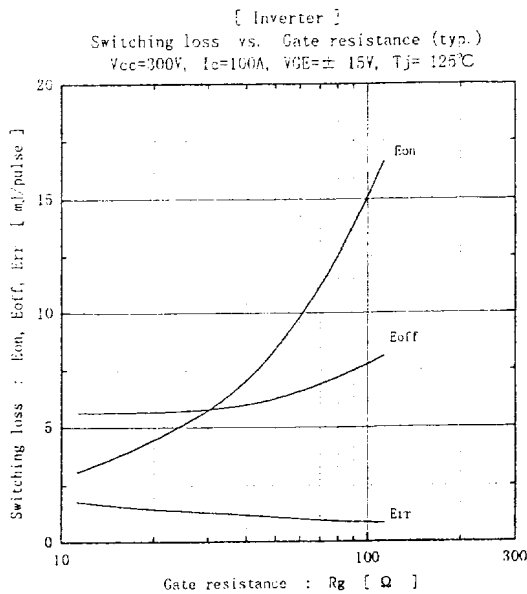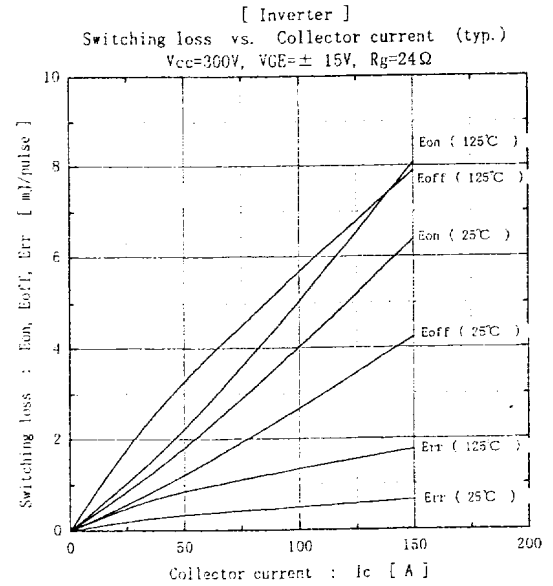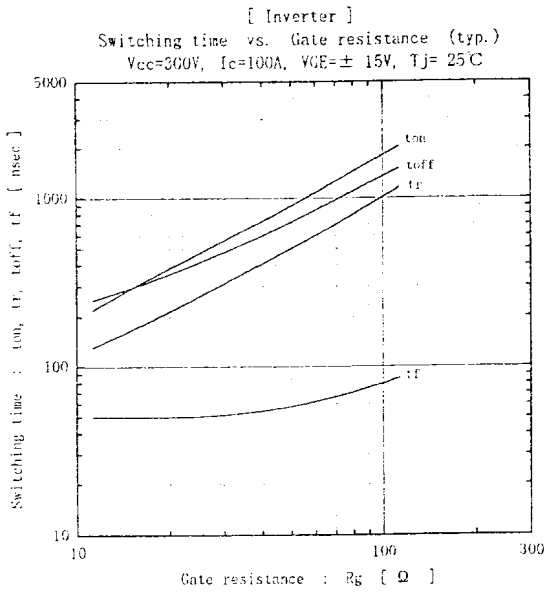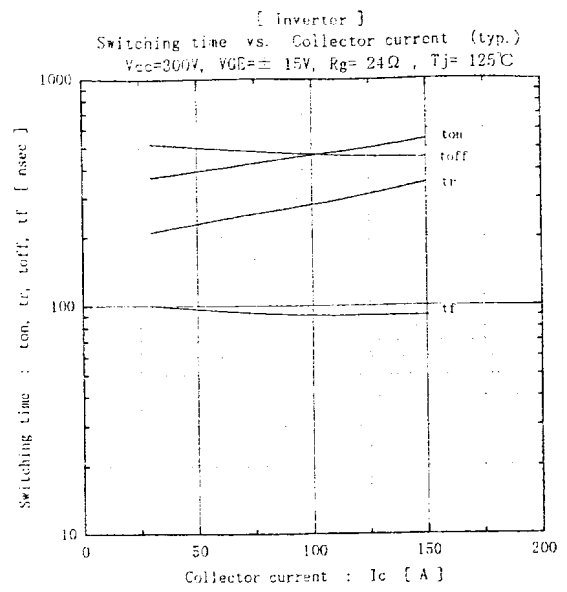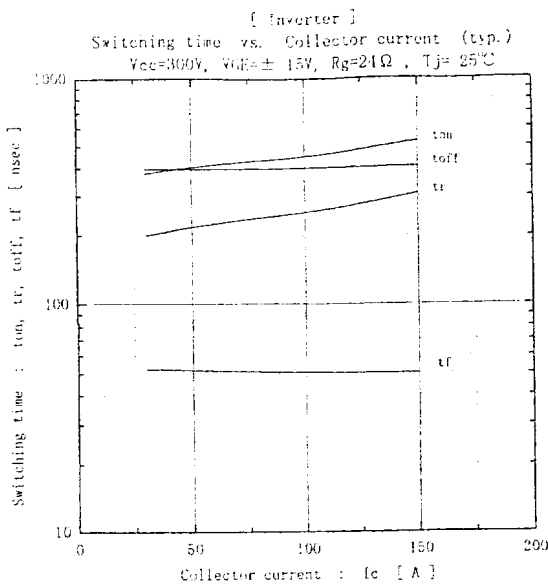

Fuji Electric Co., Ltd.

DWG. NO.


MS6M 0553

8 / 10


H04-004-03

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.


[Inverter]
Forward current vs. Forward on voltage (typ.)

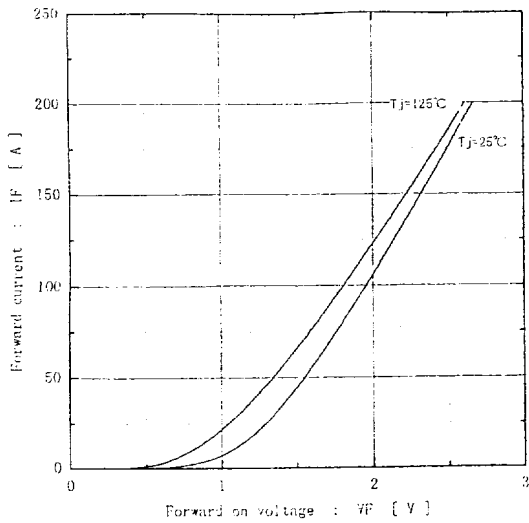


[Inverter]
Reverse recovery characteristics (typ.)
 $V_{CC}=300V, V_{GE}=\pm 15V, R_g=21\Omega$

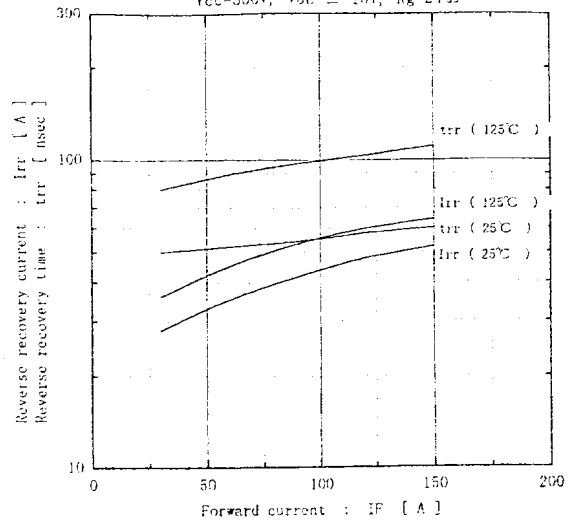


[Converter]
Forward current vs. Forward on voltage (typ.)

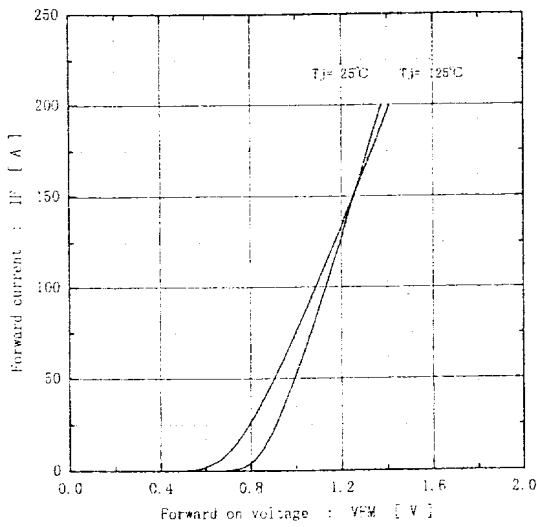

Transient thermal resistance

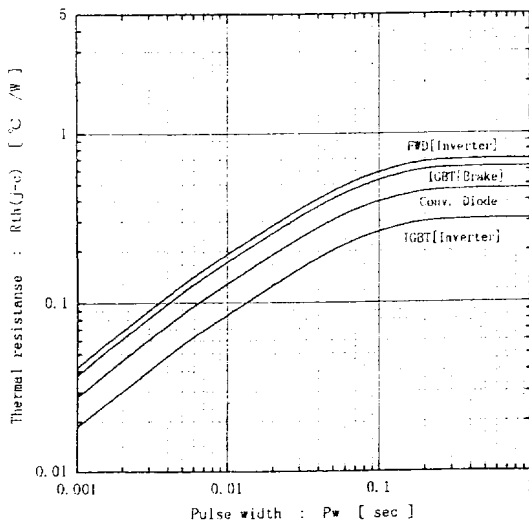

[Thermistor]
Temperature characteristic (typ.)

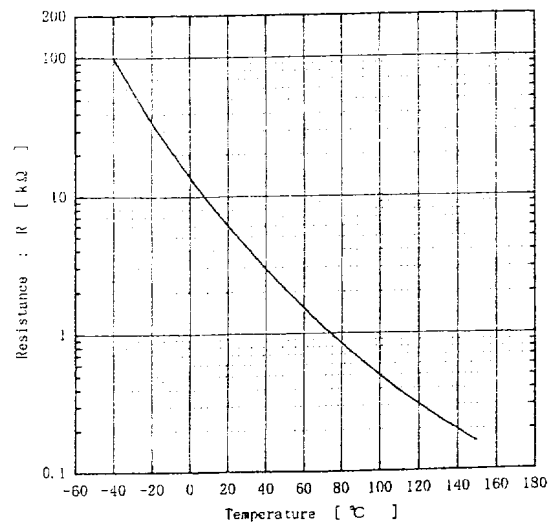

Fuji Electric Co., Ltd.







DWG. NO.

MS6M 0553

9 / 10

H04-004-03

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

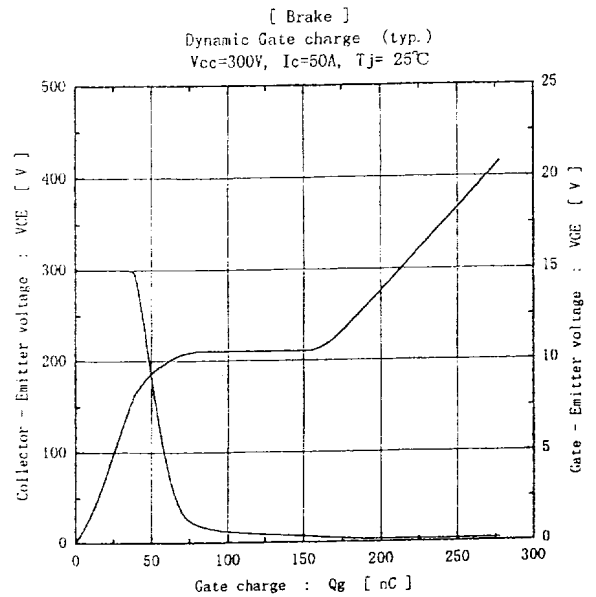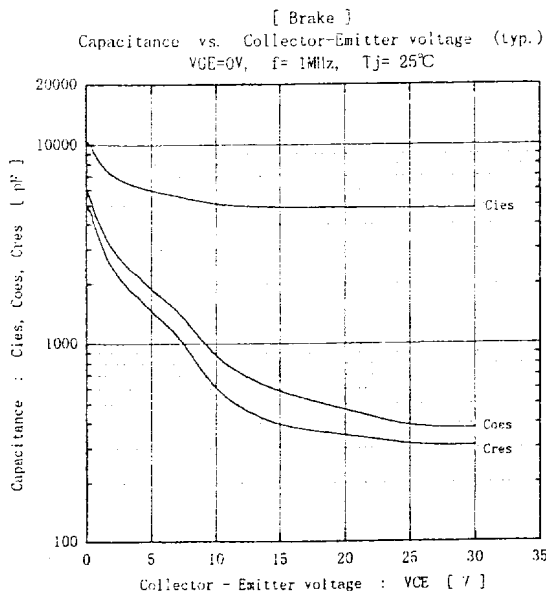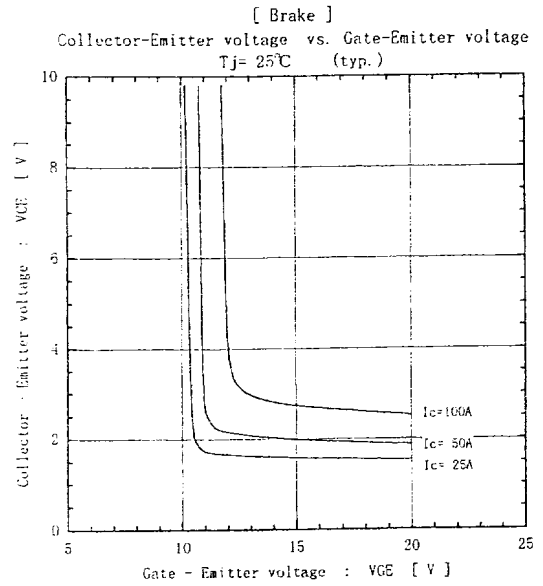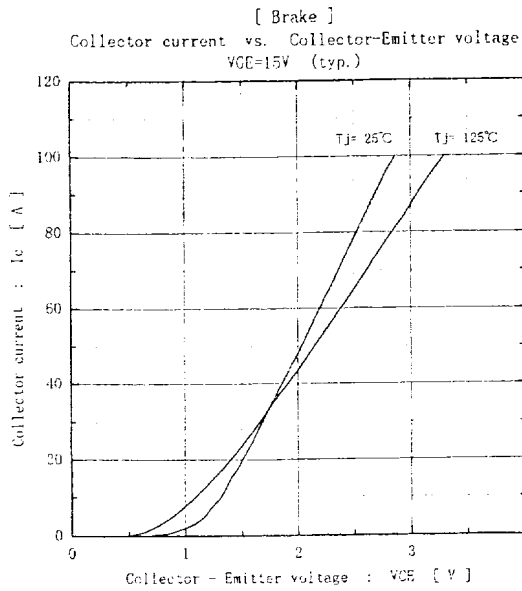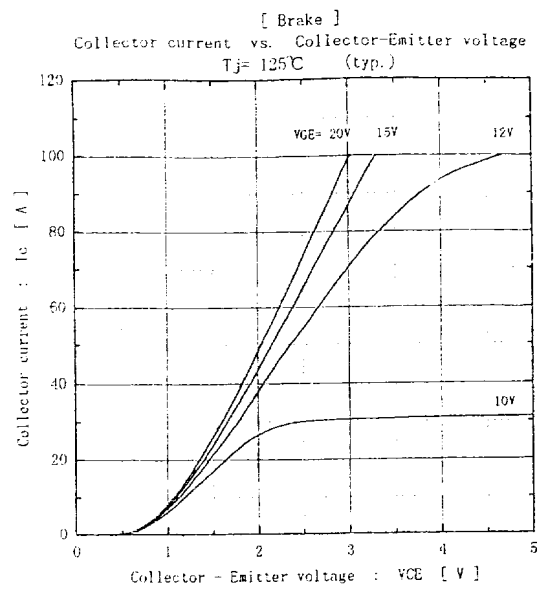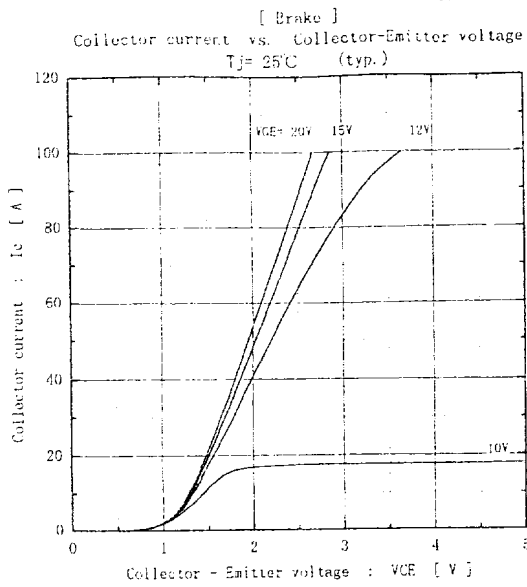

Fuji Electric Co., Ltd.

DWG. NO.

MS6M 0553

10/10

H04-004-03