


PowerBlock Micro-Miniature Modular Switching Power Supplies

PWB series



2"L x 1"W x 0.6"H



High Efficiency

				c 🅦 us 🛛 👜	CB (€
Model Number	Output Voltage	Output Amps	Output Watts	Size (inches)	Fully Approved
PWB-5000	3.3 VDC	1.25	4W	1 x 2 x 0.6	IEC60950 EN60950
PWB-5001	5 VDC	1	5W	1 x 2 x 0.6	UL60950-1 CSA22.2-60950-1
PWB-5002	12 VDC	0.42	5W	1 x 2 x 0.6	CSA22.2-00950-1
PWB-5003	15 VDC	0.33	5W	1 x 2 x 0.6	
PWB-5005	24 VDC	0.23	5W	1 x 2 x 0.6	



PowerBlock Micro-Miniature Modular Switching Power Supplies

INPUT SPECIFICATIONS

Input Voltage, Nominal	90-264VAC	
	Nominal: 100-240VAC	
Input Frequency	47-63 Hz, 50-60Hz Nom.	
Inrush Current	20A @ 100VAC, typ	
	40A @ 200VAC, typ	

OUTPUT SPECIFICATIONS

Output Voltage/Current	See Specific Model	
Initial Accuracy	+/-1%, typ	
Load Regulation	3.3V & 5V:+/-1%, typ	
20%-FL	12V, 15V, & 24V:+/-0.5%, typ	
Line Regulation	3.3V & 5V:+/-1%, typ	
	12V, 15V, & 24V:+/-0.5%, typ	
Temperature Coefficient	+/-0.03%/°C	
Ripple/Noise(20Mhz BW)	200-250mV Pk-Pk, typ	
Overvoltage Protection	Clamp, 130-150% *	
Hold Up Time	30mS, typ	
Short Circuit Protection	Continuous *	
OverTemp Protection	Latching, Recovering	
Current Limit	130% typ,Self-Reset Foldback	

GENERAL SPECIFICATIONS

Input-Out Isolation	3000VAC
Output-Ground Isolation	1000VAC
Input-Ground Isolation	2500VAC
Operating Frequency	100 Khz, fixed, typ
Efficiency (@ Full Load)	75 - 80%, typ
Safety	EN60950, TUV File# B050122749064
	IEC60950, CB File# DE 3-51024
	UL60950-1, UL File# E167432

PWB series

ENVIRONMENTAL SPECIFICATIONS

Oper. Temperature	-25 to +50°C FL
	Derate Linearly to 25%L @ 70°C
Relative Humidity	0-95%, Non-Condensing
Storage Temperature	-25 to +71°C *
MTBF	466,553 Hrs
	MIL-HDBK 217, Parts Count Method,
	25°C, Ground Benign

PHYSICAL SPECIFICATIONS

Case Material	Rynite, 94V-0 Rated
Construction	Encapsulated, Soft Pot
Weight	1.5 oz (42g)

All specifications are typical at nominal input, full load, and 25DegC unless otherwise noted

* These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long term reliability. Proper operation under conditions other than the standard operating conditions is neither warranteed nor implied.

WWW.ASTRODYNE.COM


Astrodyne products are not authorized or warranteed for use as critical components in life support systems, equipment used in hazardous environments, nuclear controls systems, or other mission-critical applications.




PowerBlock Micro-Miniature Modular Switching Power Supplies

PWB series

MECHANICAL SPECIFICATIONS

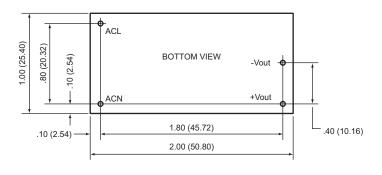


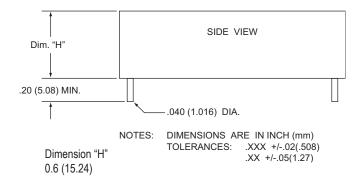

POWER BLOCK APPLICATION NOTES

Output Noise

The figure below ia a sample diagram to reduce Output Ripple and Noise.



C1 = Electrolytic Capacitor Capacitance = 22uF - 220uF Voltage = Two times rated output voltage

L1 = 3uH - 10uH


- C2 = Electrolytic Capacitor Capacitance = 22uF - 47uF Voltage = Two times rated output voltage
- C3 = Ceramic Capacitor Capacitance = 0.01uF - 0.1uF Voltage = 50 volt


Notes:

- 1. The use of C1 alone may reduce noise to desired levels, if not use L1, C2 and C3 in addition to C1.
- 2. The figure above is a suggested circuit. Only by trying true application can levels be tested.

WWW.ASTRODYNE.COM

EMI





C1 = 0.22uF X Capacitor

L1 = 10mH - 30mH Common Mode, Choke

C2, C3 = 220pF Y Capacitors

Notes:

The diagram above is a recommended circuit, only by trying true application can levels be measured.

Inrush Current

If desired, the use of a Choke, NTC or Inrush Current Limiter may be used to reduce the Inrush Current