

M5M34050P/FP

M5M34051P/FP

DUAL RS-422A TRANSCEIVER

DESCRIPTION

The M5M34050P/FP and M5M34051P/FP are semiconductor integrated circuits each with two differential drivers and differential receivers fulfilling the RS-422A EIA Standards.

FEATURES

[Common]

- Single 5V power supply
- Wide operating temperature range
($T_a = -20 \sim +75^\circ\text{C}$)
- Both DIP and SOP packages are available.

[Driver]

- Termination resistance of 100Ω can be connected between outputs.
- High output impedance when power is off.
- Includes output control input

[Receiver]

- High input sensitivity ($\pm 200\text{mV}$ max.)
- Hysteresis input (50mV typ.)
- High input impedance ($12\text{k}\Omega$ min.)
- When input is open, output is "H" (failsafe function).
- Includes output control input (M5M34050P/FP)

APPLICATION


HDD, LBP, printers, POS and other digital equipment high-speed data transmission interfaces.

FUNCTIONAL DESCRIPTION


The drivers and the receivers have the same characteristics as the M5A26LS31P and the M5A26LS32AP, respectively.

The driver input, receiver output, and the two output control inputs have electrical characteristics equivalent to LS-TTL, enabling direct drive of TTL ICs. The M5M34050P/FP has independent output control inputs DE and RE for the driver and receiver, respectively, and the same control signal can be applied to these to alternately enable and disable the driver and receiver.

The M5M34051P/FP has separate output control inputs 1DE and 2DE and disable

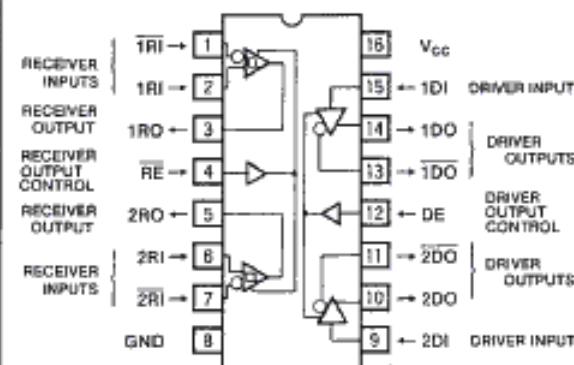PIN CONFIGURATION (TOP VIEW)

OUTLINE 16P4 (M5M34050P)
16P2N-A (M5M34050FP)

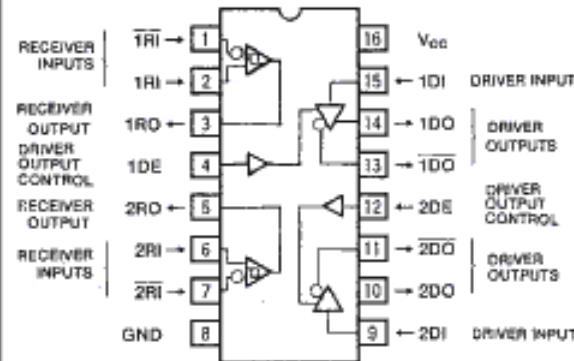

OUTLINE 16P4 (M5M34051P)
16P2N-A (M5M34051FP)

FUNCTION TABLE

(1) Driver

DI	DE	DO	DO
L	H	L	H
H	H	H	L
X	L	Z	Z

(2) Receiver

RI	RI	RE	RO
$V_{IO} > +0.2\text{V}$		L	H
$-0.2\text{V} < V_{IO} < 0.2\text{V}$		L	*
$V_{IO} < -0.2\text{V}$		L	L
X		H	Z

Note 1 : X : Irrelevant

Z : high impedance

* : Output status unspecified

V_{IO} : (RI applied voltage) - (RI applied voltage)

ABSOLUTE MAXIMUM RATINGS ($T_a = -20 \sim +75^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Ratings		Unit
			Min.	Max.	
V_{cc}	Supply voltage		-0.5	+7	V
V_i	Input voltage	R _I , \overline{R}_I	-20	+20	V
V_{ip}	Voltage between inputs	Other than above	-0.5	+7	V
V_o	Output voltage	R _I , \overline{R}_I	-20	+20	V
P_d	Power dissipation	DIP	$T_a = 25^\circ\text{C}$ (Note 2)		1000
		SOP	When mounted on PCB, $T_a = 25^\circ\text{C}$ (Note 3)		900
T_{sg}	Storage temperature range		-65	+150	$^\circ\text{C}$

Note 2 : When $T_a \geq 40^\circ\text{C}$, derate as 9mW/ $^\circ\text{C}$.3 : When $T_a \geq 25^\circ\text{C}$, derate as 7.2mW/ $^\circ\text{C}$.RECOMMENDED OPERATING CONDITIONS ($T_a = -20 \sim +75^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Limits			Unit
			Min.	Typ.	Max.	
V_{cc}	Supply voltage		4.75	5	5.25	V
I_{OH}	"H" output current	DO, $\overline{\text{DO}}$	$V_{OH} \geq 2.5V$	0	-20	mA
		RO	$V_{OH} \geq 2.7V$	0	-400	μA
I_{OL}	"L" output current	DO, $\overline{\text{DO}}$	$V_{OL} \leq 0.5V$	0	20	mA
		RO	$V_{OL} \geq 0.45V$	0	8	
V_{IO}	Common mode input voltage (Note 4)		-7	+7		V
T_{opr}	Operating temperature range	DIP	-20	+75	+75	$^\circ\text{C}$
		SOP	When IC is mounted on PCB		-20	+75

Note 4 : The common mode input voltage is the average value of the voltage applied to R_I and \overline{R}_I .ELECTRICAL CHARACTERISTICS ($T_a = -20 \sim +75^\circ\text{C}$ unless otherwise noted)

<Driver Section>

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.*	Max.	
V_{IH}	"H" input voltage		2			V
V_{IL}	"L" input voltage				0.8	V
V_{IK}	Input clamp voltage	$V_{cc} = 4.75V$, $I_{oh} = -18\text{mA}$			-1.5	V
V_{OH}	"H" output voltage	$V_{cc} = 4.75V$, $I_{oh} = -20\text{mA}$	2.5	3.1		V
V_{OL}	"L" output voltage	$V_{cc} = 4.75V$, $I_{ol} = 20\text{mA}$	0.32	0.5		V
I_{OZL}	"L" output current when off	$V_{cc} = 5.25V$, $V_o = 0.5V$			-20	μA
I_{OZH}	"H" output current when off	$V_{cc} = 5.25V$, $V_o = 2.5V$			20	μA
I_{x+}	Output leak current when power off	$V_{cc} = 0V$	$V_c = 6V$		50	μA
I_{x-}			$V_c = -0.25V$		-50	μA
I_{IH}	"H" input current	$V_{cc} = 5.25V$	$V_i = 7.0V$	0.1		mA
I_{IL}	"L" input current	$V_{cc} = 5.25V$, $V_i = 0.4V$	$V_i = 2.7V$	20		μA
I_{os}	Output short current (Note 5)	$V_{cc} = 5.25V$	-0.05	-0.36		mA
			-30		-150	

Note 5 : Measurement is conducted over a short period of time, and more than 2 outputs should not be shorted at a time.

<Receiver Section>

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.*	Max.	
V_{TH}	High threshold voltage	RI, \bar{RI}	$V_{OH}=2.7V, I_{OH}=-400\mu A$ $V_O=V_{TH}$			0.2 V
V_{TL}	Low threshold voltage	RI, \bar{RI}	$V_{OL}=0.45V, I_{OL}=8mA$ $V_O=V_{TL}$	-0.2		V
V_{T+} V_{T-}	Hysteresis width (Note 6)	RI, \bar{RI}			50	mV
V_{IH}	"H" input voltage	\bar{RE}		2		V
V_{IL}	"L" input voltage	\bar{RE}			0.8	V
V_{IK}	Input clamp voltage	\bar{RE}	$V_{CC}=4.75V, I_{IK}=-18mA$		-1.5	V
V_{OH}	"H" output voltage		$V_{CC}=4.75V, V_{OL}=V_{IL}$ $V_O=0.4V, I_{OH}=-400\mu A$	2.7	3.5	V
V_{OL}	"L" output voltage		$V_{CC}=4.75V$ $V_O=0.4V$ $V_{OL}(\bar{RE})=V_{IL}$		0.31	V
I_{OCL}	"L" output current when off		$V_{CC}=5.25V, V_O=0.4V$ $V_O=3V$		20	μA
I_{OZH}	"H" output current when off		$V_{CC}=5.25V, V_O=2.4V$ $V_O=3V$		-20	μA
I_S	Input current	RI, \bar{RI}	$0 \leq V_{CC} \leq 5.25V, V_I=12V$ $0 \leq V_{CC} \leq 5.25V, V_I=-7V$		1.0	mA
I_{IH}	"H" input current	\bar{RE}	$V_I=7.0V$ $V_I=2.7V$		100	μA
I_{IL}	"L" input current	\bar{RE}	$V_I=0.4V$		20	mA
I_{OS}	Output short current (Note 5)		$V_{CC}=5.25V$	-15	-85	mA

Note 6 : The hysteresis width is the difference between the threshold voltage V_{T+} and V_{T-} in the positive and negative directions, respectively.

<Power Supply Section>

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.*	Max.	
I_{CC}	Supply current	$V_{CC}=5.25V$, output enable condition		58	90	mA

* : All typical values are at $V_{CC}=5V$ and $T_A=25^\circ C$.

SWITCHING CHARACTERISTICS ($V_{CC}=5V$ and $T_A=25^\circ C$)
 <Driver Section>


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
t_{PLH}	Outputs "L-H", "H-L" propagation time, from input D1 to output D0, D0	$C_L=30pF$		11	20	ns
t_{PHL}				11	20	ns
Skew	Skew (between outputs D0 and D0)				6	ns
t_{PZH}	"H" output enable time	$C_L=30pF$ $R_L=75\Omega$ to GND		8	40	ns
t_{PZL}	"L" output enable time	$C_L=30pF$ $R_L=180\Omega$ to V_{CC}		18	45	ns
t_{PHZ}	"H" output disable time	$C_L=10pF$ $R_L=75\Omega$ to GND		10	30	ns
t_{PLZ}	"L" output disable time	$C_L=10pF$ $R_L=180\Omega$ to V_{CC}		11	35	ns

<Receiver Section>

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
t_{PLH}	Outputs "L-H", "H-L" propagation time, from inputs R1 and $\bar{R}1$ to output R0	$C_L=15pF$		19	40	ns
t_{PHL}				29	40	ns
t_{PZH}	"H" output enable time	$C_L=15pF$		10	30	ns
t_{PZL}	"L" output enable time	$C_L=15pF$		16	30	ns
t_{PHZ}	"H" output disable time	$C_L=15pF$		18	35	ns
t_{PLZ}	"L" output disable time	$C_L=15pF$		16	35	ns

TIMING REQUIREMENTS ($V_{CC}=5V$, $T_A=25^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
t_r, t_f	Control input rise, fall time	RE, DE			1	μs

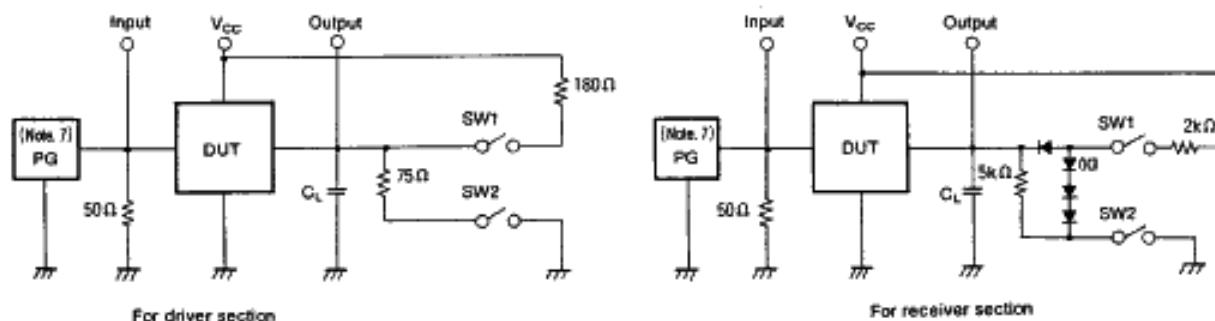TEST CIRCUIT

Parameter	SW1	SW2	C_L
t_{PLH}	Open	Open	30pF
t_{PHL}	Open	Open	30pF
t_{PZH}	Open	Closed	30pF
t_{PZL}	Closed	Open	30pF
t_{PHZ}	Open	Closed	10pF
t_{PLZ}	Closed	Open	10pF


Parameter	SW1	SW2	C_L
t_{PLH}	Open	Open	
t_{PHL}	Open	Open	
t_{PZH}	Open	Closed	
t_{PZL}	Closed	Open	
t_{PHZ}	Closed	Closed	
t_{PLZ}	Closed	Closed	

Note 7 : PG (pulse generator) output conditions are as follows.

- Rising time : $t_r \leq 15\text{ns}$
- Falling time : $t_f \leq 6\text{ ns}$
- Repeat frequency : PRR = 1 MHz
- Pulse amp. : $V_p = 3 V_{p-p}$
- Output impedance : $Z_o = 50\Omega$

TIMING DIAGRAM

Driver Section

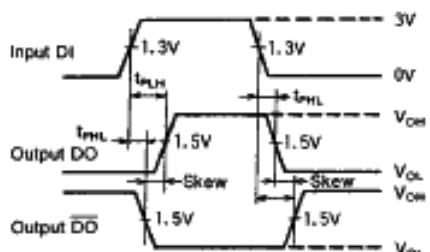

Receiver Section

