

MC1439
MC1539

UNCOMPENSATED OPERATIONAL AMPLIFIER

... designed for use as a summing amplifier, integrator, or amplifier with operating characteristics as a function of the external feedback components.

- Low Input Offset Voltage — 3.0 mV max
- Low Input Offset Current — 60 nA max
- Large Power-Bandwidth — 20 Vp-p Output Swing at 20 kHz min
- Output Short-Circuit Protection
- Input Over-Voltage Protection
- Class AB Output for Excellent Linearity
- High Slew Rate — 34 V/μs typ

FIGURE 1 — HIGH SLEW-RATE INVERTER

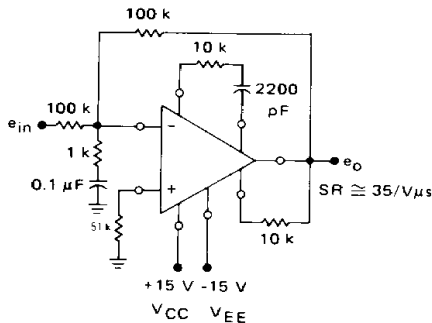


FIGURE 2 — OUTPUT NULLING CIRCUIT


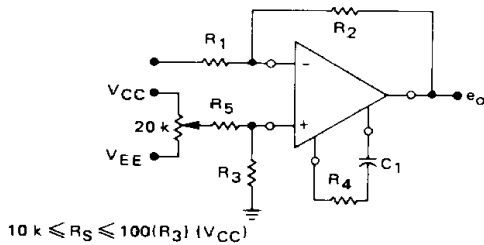




FIGURE 3 — OUTPUT LIMITING CIRCUIT

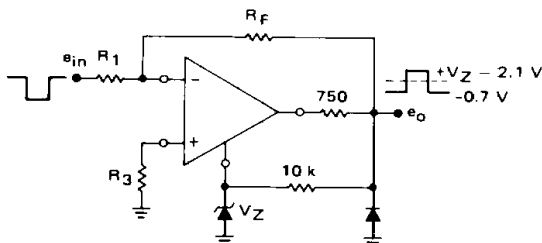


OPERATIONAL AMPLIFIER

SILICON MONOLITHIC
INTEGRATED CIRCUIT


G SUFFIX
METAL PACKAGE
CASE 601

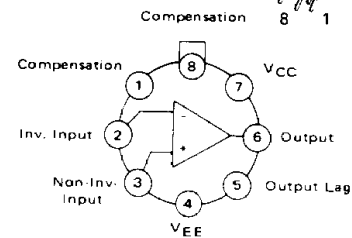

(Top View)



P1 SUFFIX
PLASTIC PACKAGE
CASE 626
(MC1439 Only)

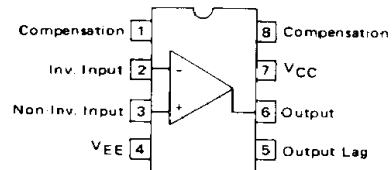

(Top View)

ORDERING INFORMATION

Device	Temperature Range	Package
MC1439G	0°C to +70°C	Metal Can
MC1439P1	0°C to +70°C	Plastic DIP
MC1539G	-55°C to +125°C	Metal Can

MC1439, MC1539

ELECTRICAL CHARACTERISTICS (V_{CC} = +15 Vdc, V_{EE} = -15 Vdc, T_A = +25°C unless otherwise noted.)

Characteristic	Symbol	MC1539			MC1439			Unit
		Min	Typ	Max	Min	Typ	Max	
Input Bias Current (T _A = +25°C) (T _A = T _{low} ①)	I _B	—	0.20	0.50	—	0.20	1.0	μA
		—	0.23	0.70	—	0.23	1.5	
Input Offset Current (T _A = T _{low}) (T _A = +25°C) (T _A = T _{high} ①)	I _{IO}	—	—	75	—	—	150	nA
		—	20	60	—	20	100	
		—	—	75	—	—	150	
Input Offset Voltage (T _A = +25°C) (T _A = T _{low} , T _{high})	V _{IO}	—	1.0	3.0	—	2.0	7.5	mV
		—	—	4.0	—	—	—	
Average Temperature Coefficient of Input Offset Voltage (T _A = T _{low} to T _{high}) (R _S = 50 Ω) (R _S ≤ 10 kΩ)	TCV _{IO}	—	3.0	—	—	3.0	—	μV/°C
		—	5.0	—	—	5.0	—	
Input Impedance (f = 20 Hz)	z _{in}	150	300	—	100	300	—	kΩ
Input Common-Mode Voltage Range	V _{ICR}	±11	+12	—	±11	±12	—	V _{pk}
Equivalent Input Noise Voltage (R _S = 10 kΩ, Noise Bandwidth = 1.0 Hz, f = 1.0 kHz)	e _n	—	30	—	—	30	—	nV/(Hz) ^{1/2}
Common-Mode Rejection Ratio (f = 1.0 kHz)	CMRR	80	110	—	80	110	—	dB
Open-Loop Voltage Gain (V _O = ±10 V, R _L = 10 kΩ, R _S = ∞) (T _A = +25°C to T _{high}) (T _A = T _{low})	AVOL	50,000	120,000	—	15,000	100,000	—	—
		25,000	100,000	—	15,000	100,000	—	
Power Bandwidth (A _V = 1, THD ≤ 5%, V _O = 20 V _{p-p}) (R _L = 2.0 kΩ) (R _L = 1.0 kΩ, R _S = 10 k)	PBW	—	—	—	10	50	—	kHz
		20	50	—	—	—	—	
Step Response { Gain = 1000, no overshoot, R1 = 1.0 kΩ, R2 = 1.0 MΩ, R3 = 1.0 kΩ, R4 = 30 kΩ, R5 = 10 kΩ, C1 = 1000 pF }	t _{THL}	—	130	—	—	130	—	ns
	t _{pd}	—	190	—	—	190	—	ns
	SR	—	6.0	—	—	6.0	—	V/μs
{ Gain = 1000, 15% overshoot, R1 = 1.0 kΩ, R2 = 1.0 MΩ, R3 = 1.0 kΩ, R4 = 0, R5 = 10 kΩ, C1 = 10 pF }	t _{THL}	—	80	—	—	80	—	ns
	t _{pd}	—	100	—	—	100	—	ns
	SR	—	14	—	—	14	—	V/μs
{ Gain = 100, no overshoot, R1 = 1.0 kΩ, R2 = 100 kΩ, R3 = 1.0 kΩ, R4 = 10 kΩ, R5 = 10 kΩ, C1 = 2200 pF }	t _{THL}	—	60	—	—	60	—	ns
	t _{pd}	—	100	—	—	100	—	ns
	SR	—	34	—	—	34	—	V/μs
{ Gain = 10, 15% overshoot, R1 = 1.0 kΩ, R2 = 10 kΩ, R3 = 1.0 kΩ, R4 = 1.0 kΩ, R5 = 10 kΩ, C1 = 2200 pF }	t _{THL}	—	120	—	—	120	—	ns
	t _{pd}	—	80	—	—	80	—	ns
	SR	—	6.25	—	—	6.25	—	V/μs
{ Gain = 1, 15% overshoot, R1 = 10 kΩ, R2 = 10 kΩ, R3 = 5.0 kΩ, R4 = 390 Ω, R5 = 10 kΩ, C1 = 2200 pF }	t _{THL}	—	160	—	—	160	—	ns
	t _{pd}	—	80	—	—	80	—	ns
	SR	—	4.2	—	—	4.2	—	V/μs
Output Impedance (f = 20 Hz)	z _o	—	4.0	—	—	4.0	—	kΩ
Output Voltage Swing (R _L = 2.0 kΩ, f = 1.0 kHz) (R _L = 1.0 kΩ, f = 1.0 kHz)	V _O	—	—	—	+10	+13	—	V _{pk}
		±10	+13	—	—	—	—	
Positive Supply Rejection Ratio (V _{EE} constant, R _S = ∞)	PSRR+	—	50	150	—	50	200	μV/V
Negative Supply Rejection Ratio (V _{CC} constant, R _S = ∞)	PSRR-	—	50	150	—	50	200	μV/V
Power Supply Current (V _O = 0)	I _{CC} I _{EE}	—	3.0	5.0	—	3.0	6.7	mAdc
		—	3.0	5.0	—	3.0	6.7	

① T_{low} = 0°C for MC1439 T_{high} = +70°C for MC1439
 -55°C for MC1539 +125°C for MC1539



MC1439, MC1539

2

MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$ unless otherwise noted.)

Rating	Symbol	Value	Unit
Power Supply Voltage	V_{CC} V_{EE}	+18 +18	Vdc
Differential Input Voltage Range	V_{IDR}	$\pm(V_{CC} + V_{EE})$	Vdc
Common-Mode Input Voltage Range	V_{ICR}	$+V_{CC} - V_{EE} $	Vdc
Load Current	I_L	15	mA
Output Short-Circuit Duration	t_S	Continuous	
Power Dissipation (Package Limitation)	P_D		
Metal Package		680	mW
Derate above $T_A = +25^\circ\text{C}$		4.6	mW/ $^\circ\text{C}$
Plastic Dual In-Line Packages MC1439		625	mW
Derate above $T_A = +25^\circ\text{C}$		5.0	mW/ $^\circ\text{C}$
Operating Temperature Range	T_A	-55 to +125 0 to +70	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-65 to +150 -55 to +125	$^\circ\text{C}$

FIGURE 4 – EQUIVALENT CIRCUIT SCHEMATIC

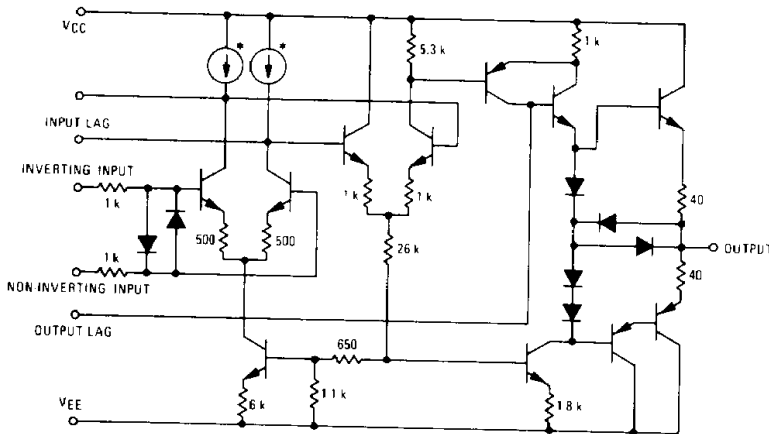


FIGURE 5 – EQUIVALENT CIRCUIT


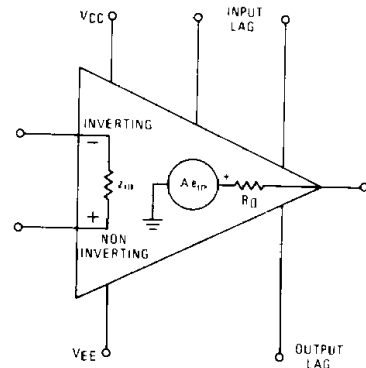


FIGURE 6 – TEST CIRCUIT

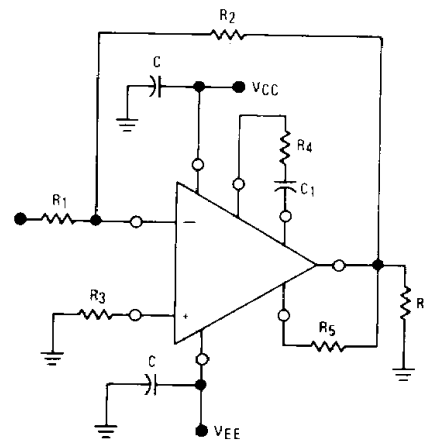

TYPICAL OUTPUT CHARACTERISTICS

($V_{CC} = +15\text{Vdc}$, $V_{EE} = -15\text{Vdc}$, $T_A = +25^\circ\text{C}$)

FIGURE NO.	CURVE NO.	VOLTAGE GAIN	TEST CONDITIONS (FIGURE 6)					
			$R_1 (\Omega)$	$R_2 (\Omega)$	$R_3 (\Omega)$	$R_4 (\Omega)$	$R_5 (\Omega)$	$C_1 (\text{pF})$
7, 10, 12	1	A_{vol}	0	∞	0	∞	∞	0
	2	1	10 k	10 k	5.0 k	390	10 k	2200
	3	10	1.0 k	10 k	1.0 k	1.0 k	10 k	2200
	4	100	1.0 k	100 k	1.0 k	10 k	10 k	2200
	5	1000	1.0 k	1.0 k	1.0 k	30 k	10 k	1000
8	1	A_{vol}	0	∞	0	∞	∞	0
	2	1	10 k	10 k	5.0 k	390	10 k	2200
	3	10	1.0 k	10 k	1.0 k	1.0 k	10 k	2200
	4	100	1.0 k	100 k	1.0 k	10 k	10 k	2200
	5	1000	1.0 k	1.0 k	1.0 k	30 k	10 k	1000
13	ALL	1	10 k	10 k	5.0 k	390	10 k	2200
14	ALL	10	1.0 k	10 k	1.0 k	1.0 k	10 k	2200
15	ALL	100	1.0 k	100 k	1.0 k	10 k	10 k	2200
16	ALL	1000	1.0 k	1.0 k	1.0 k	30 k	10 k	2200

MC1439, MC1539

TYPICAL CHARACTERISTICS (continued)
 ($V_{CC} = +15$ Vdc, $V_{EE} = -15$ Vdc, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

2

FIGURE 7 – LARGE-SIGNAL SWING versus FREQUENCY

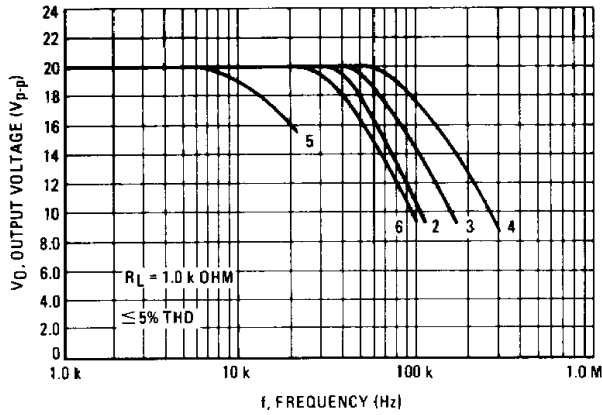


FIGURE 8 – OPEN-LOOP VOLTAGE GAIN versus FREQUENCY

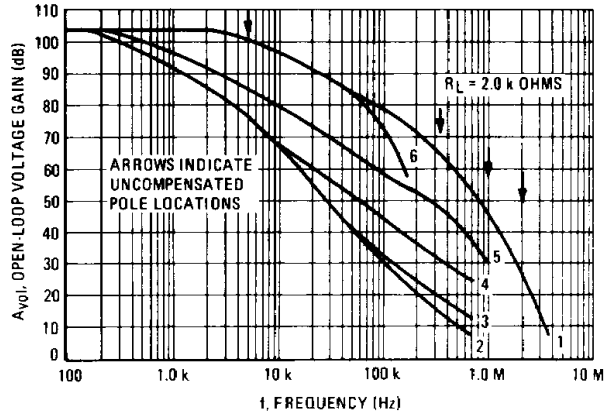


FIGURE 9 – OUTPUT VOLTAGE SWING versus LOAD RESISTANCE

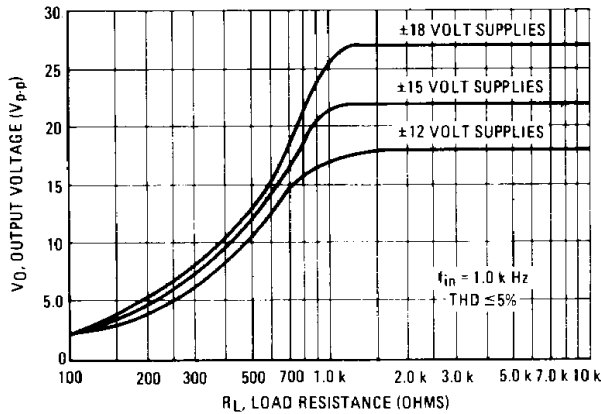


FIGURE 10 – OPEN-LOOP PHASE SHIFT versus FREQUENCY

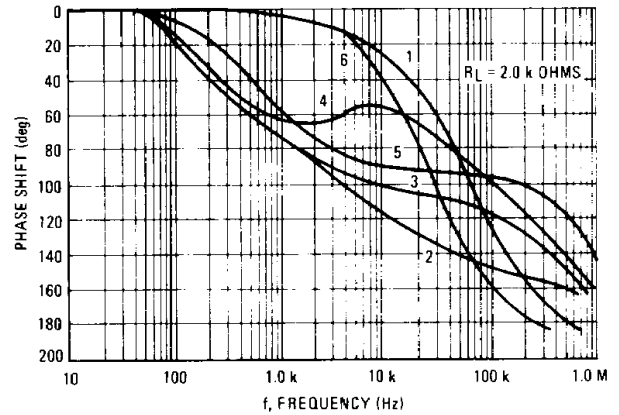


FIGURE 11 – OUTPUT VOLTAGE SWING (to clipping) versus SUPPLY


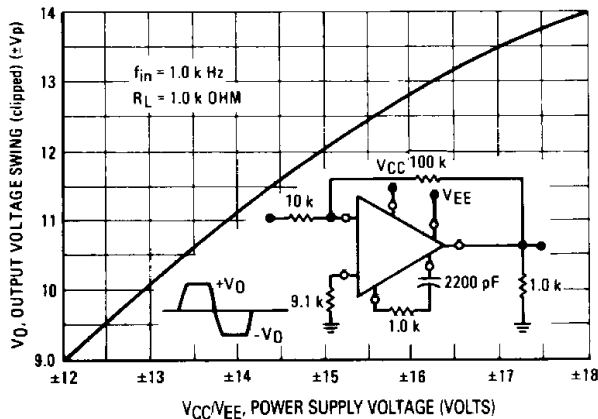


FIGURE 12 – CLOSED-LOOP GAIN versus FREQUENCY

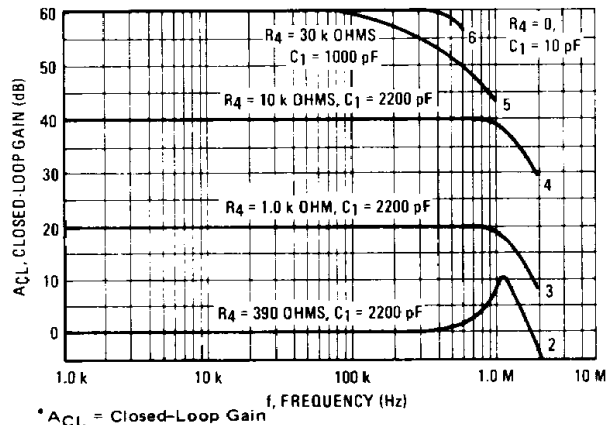

MC1439, MC1539

TYPICAL CHARACTERISTICS (continued)

($V_{CC} = +15 \text{ Vdc}$, $V_{EE} = -15 \text{ Vdc}$, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

FIGURE 13 – $A_{CL} = 1$ RESPONSE versus TEMPERATURE

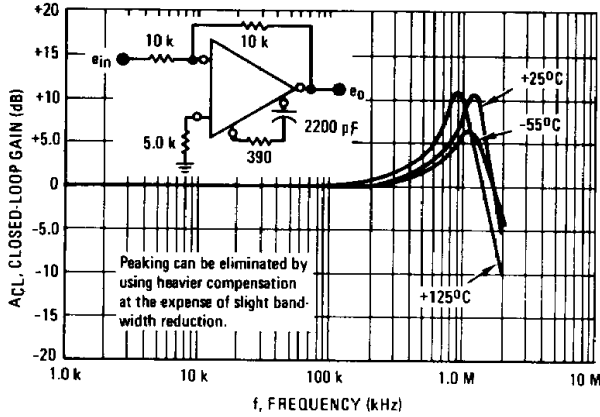


FIGURE 14 – $A_{CL} = 10$ RESPONSE versus TEMPERATURE

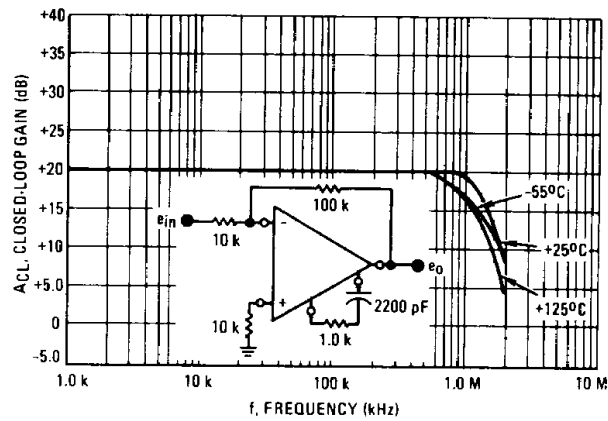


FIGURE 15 – $A_{CL} = 100$ RESPONSE versus TEMPERATURE

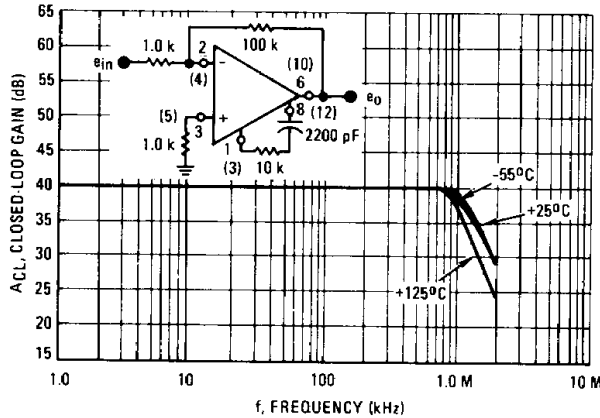


FIGURE 16 – $A_{CL} = 1000$ RESPONSE versus TEMPERATURE



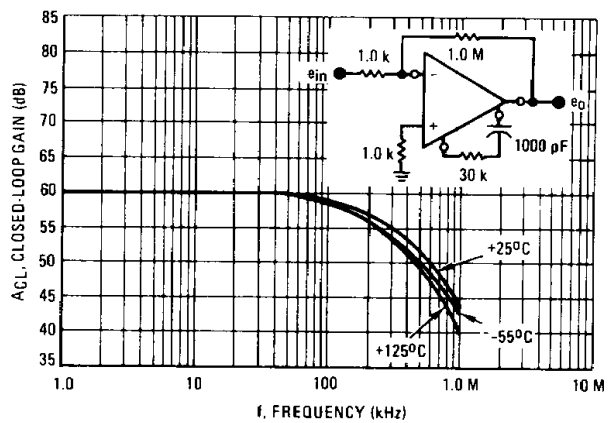


FIGURE 17 – SPECTRAL NOISE DENSITY

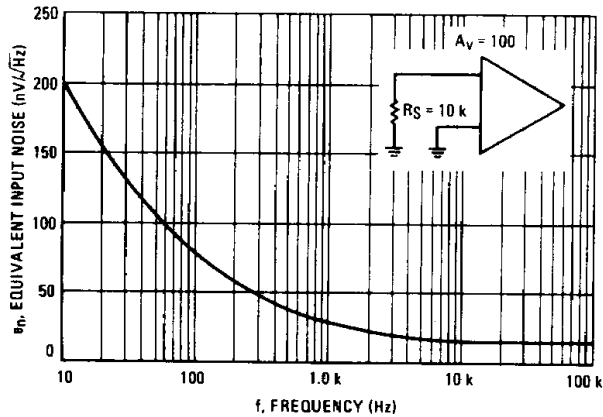

* A_{CL} = Closed-Loop Gain

FIGURE 18 – OUTPUT NOISE versus SOURCE RESISTANCE

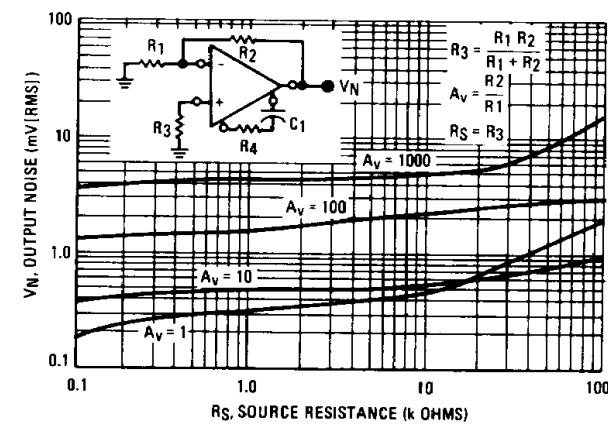

MC1439, MC1539

TYPICAL CHARACTERISTICS (continued)

($V_{CC} = +15 \text{ Vdc}$, $V_{EE} = -15 \text{ Vdc}$, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

FIGURE 19 – POWER DISSIPATION versus TEMPERATURE

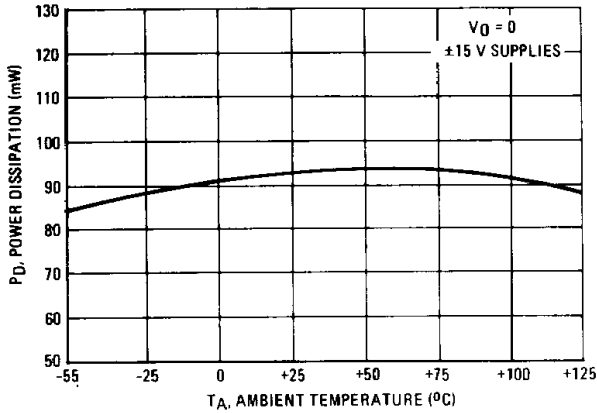


FIGURE 20 – POWER DISSIPATION versus POWER SUPPLY VOLTAGE

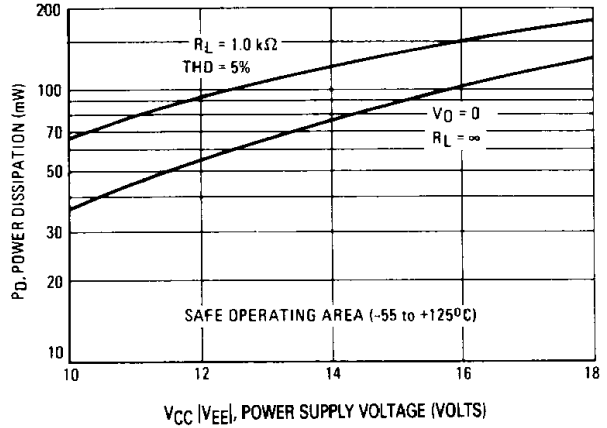


FIGURE 21 – POWER BANDWIDTH (LARGE-SIGNAL SWING versus FREQUENCY)

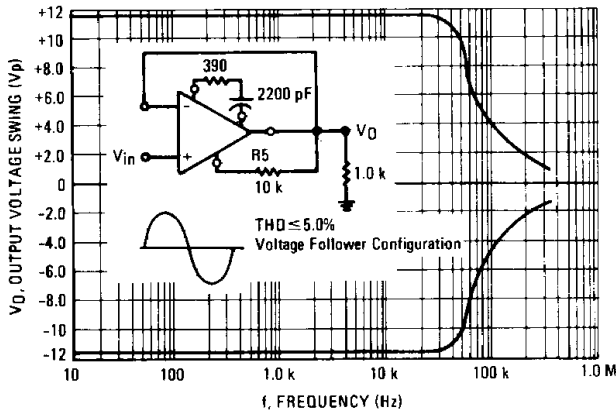


FIGURE 22 – COMMON-MODE INPUT VOLTAGE versus SUPPLY VOLTAGE

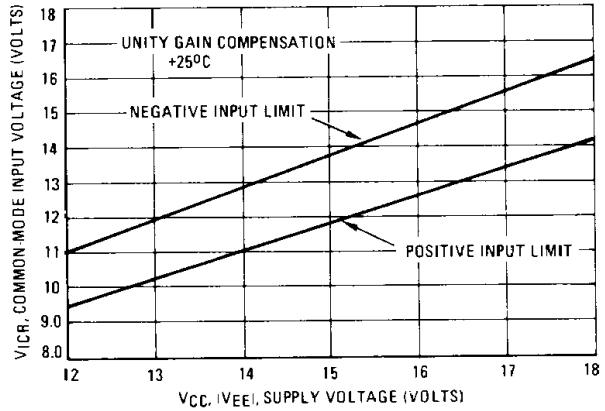


FIGURE 23 – COMMON-MODE REJECTION RATIO versus FREQUENCY



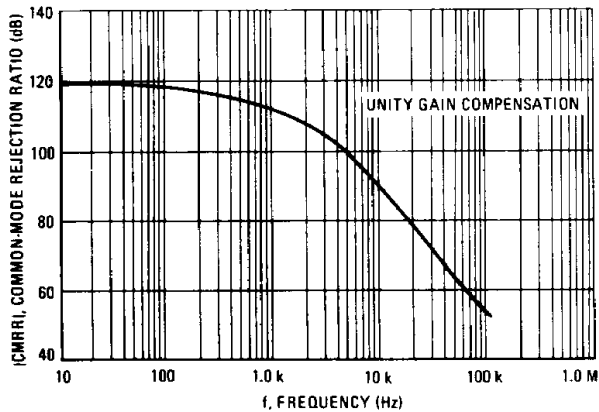


FIGURE 24 – COMMON-MODE REJECTION RATIO versus TEMPERATURE

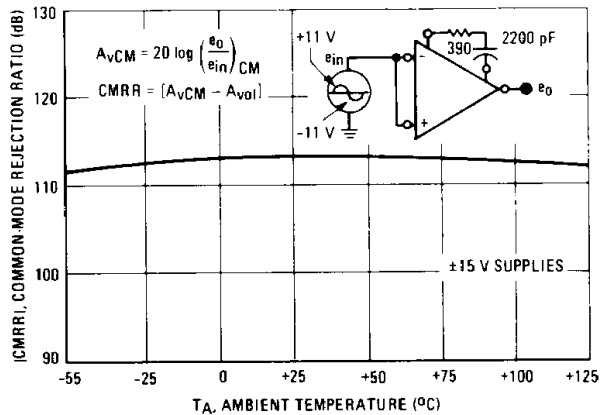

MC1439, MC1539

FIGURE 25 – VOLTAGE-FOLLOWER PULSE RESPONSE

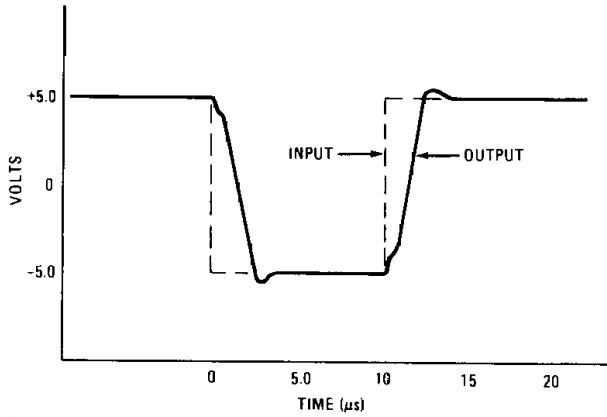

TYPICAL APPLICATIONS

FIGURE 26 – VOLTAGE FOLLOWER

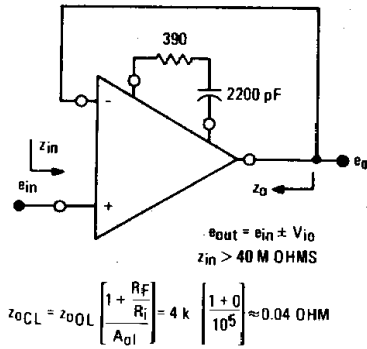


FIGURE 27 – DIFFERENTIAL AMPLIFIER

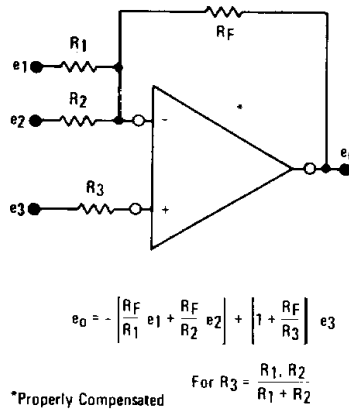


FIGURE 28 – SUMMING AMPLIFIER


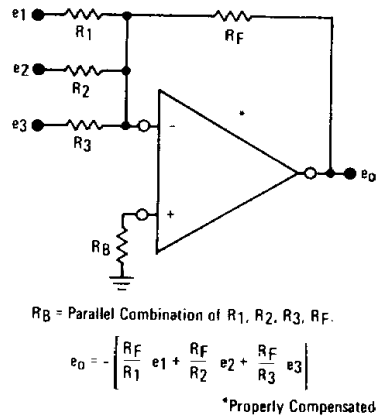


FIGURE 29 – +15 VOLT REGULATOR

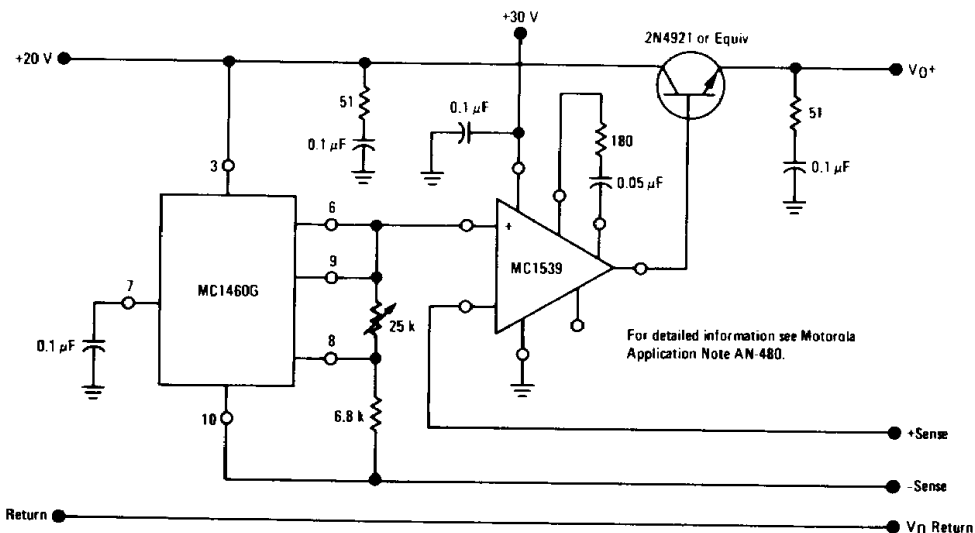

TYPICAL APPLICATIONS (continued)

FIGURE 30 – LOAD REGULATION FOR
CIRCUIT OF FIGURE 29

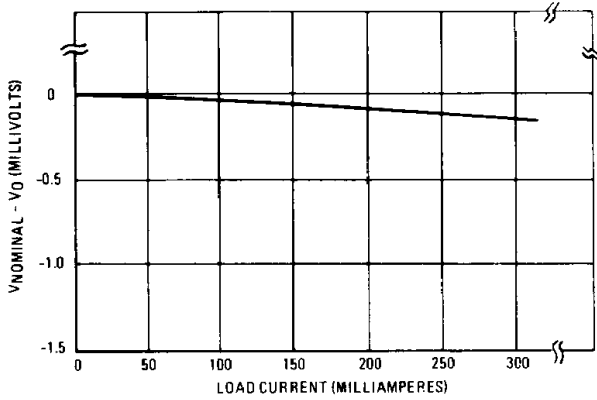


FIGURE 31 – REGULATOR OUTPUT VOLTAGE
(under pulsed load condition)

