

HE3300 S.I.L Relay Features and Benefits



Features

- Miniature single in line package
- Available with 5V, 12V or 24V coil options as standard
- High voltage switching version
- Normally open and change over contact configurations available
- External magnetic shield option

Benefits

- Single in line configuration allows high packing densities, minimising space and cost
- Lower power coil consumption than competing electromechanical devices
- Hermetically sealed switching contact is immune to the effects of its environment
- Transfer moulded package gives maximum component protection

Applications

- Security
- Telecoms
- Instrumentation
- Process Control
- Automatic Test Equipment

DIMENSIONS (in) mm




Figure 1 HE3321A, HE3351A




Figure 2 HE3321C





Figure 3 HE33300 (All)

Table 1

Relay Type	Body Type	l	w	h
HE33300	Transfer Moulded	(.950) 24,13	(.300) 7,62	(.335) 8,51
	External Shield	(.980) 24,90	(.320) 8,12	(.345) 8,76

HE3300 PCB LAYOUT (Bottom View)

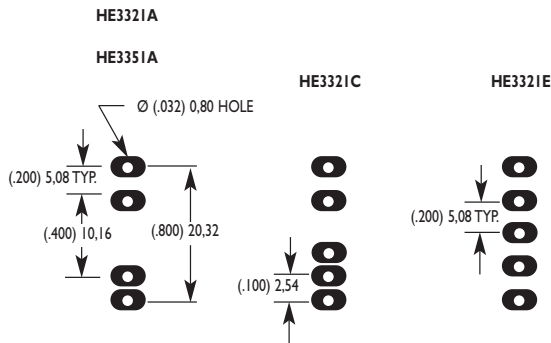

ORDERING INFORMATION

PART NUMBER	HE33XX	X	XX	XX
Model Number	HE3321 - Standard			General Options
	HE3351 - High Voltage			00 - No Options
				40 - External Magnetic Shield
Contact Type	A - Form A (SPST-NO)			Standard Coil
	C - Form C (SPDT-CO)			05 - 5 Volt
				12 - 12 Volt
				24 - 24 Volt

EXAMPLE: The HE3321A0540 is a I Form relay with a 5 Volt coil and external magnetic shield


See next page for: **Electrical and Operating Characteristics Description and Coil Characteristics**


Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
Hamlin Germany Tel: +49 (0) 6142 923920 • Fax: +49 (0) 6142 923921 • Email: sales.de@hamlin.com
Hamlectrol France Tel: +33 (0) 1 6047 3000 • Fax: +33 (0) 1 6015 9136 • Email: sales.fr@hamlin.com


Table 2 HE3300 Series  **Electrical and Operating Characteristics @ 25°C.**

Column Number			1	2	3
Contact Type			Form A SPST-NO Standard	Form A SPST-NO High Voltage	Form C SPST-CO Standard
Relay Types			HE3321A	HE3351A	HE3321C
CONTACT RATINGS	Power, Switching	Watt - max.	10	10	5
Contact Hamlin for specific load/life details	Voltage, Switching	Vdc - max.	200	300	175
	Current, Switching	A - max.	0.5	0.5	0.25
	Current, Carry	A - max.	1.2	1.5	1.5
VOLTAGE HOLD-OFF	Across Open Contacts	Vdc - min.	250	450	200
	Contacts to Coil	Vac - min.	2500	2500	2500
RESISTANCE	Contact, Initial	Ω - max.	0.150	0.150	0.200
	Insulation: Across Open Contacts	Ω - min.	10^{10}	10^{10}	10^9
	Between Isolated Terminals	Ω - min.	10^{10}	10^{10}	10^{10}
TIMING	Operate Time	ms - max.	1.0	1.0	3.0
	Release Time	ms - max.	1.0	1.0	3.0
ENVIRONMENTAL	Temperature, Operating	°C	-40 to +85	-20 to +85	-40 to +85
	Temperature, Storage	°C	-40 to +105	-40 to +105	-40 to +105
	Vibration Resistance	G - max.	20	20	20
	Shock Resistance	10-2000 Hz. G - max.	50	50	50
		11 ms, ½ sine			

Table 3 HE3300 Series Relay **Coil Characteristics @ 25°C.**

Contact Form & Type	Electrical & Operating Characteristics	Dimensions	Part Number	Nominal Coil Voltage Vdc	Coil Resistance $\pm 10\%$ Ohms	Must Operate Vdc	Must Release Vdc	Maximum Coil Voltage Vdc	Top View 2,54 mm, 0.1 in. Grid Dot on Case: Pin 1 Numbers not printed on case.
IA	See Table 2 Column 1	See Figure 1	HE3321A0500	5	500	3.75	0.5	22	
SPST-NO			HE3321A1200	12	500	9.0	1.0	22	
			HE3321A2400	24	2000	18.0	2.0	44	

IC	See Table 2 Column 3	See Figure 2	HE3321C0500	5	125	3.75	0.5	11	
SPDT-CO			HE3321C1200	12	500	9.0	1.0	22	
			HE3321C2400	24	2000	18.0	2.0	44	

IA	See Table 2 Column 2	See Figure 1	HE3351A0500	5	125	3.75	0.5	11	
SPST-NO			HE3351A1200	12	500	9.0	1.0	22	
High Voltage			HE3351A2400	24	2000	18.0	2.0	44	

INFORMATION PROVIDED ON THIS DATA SHEET IS PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.