


# T1/E1/CEPT/ISDN-PRI TRANSFORMERS

## Reinforced Insulation, 3 kVrms, SMT



- RoHS-6 peak reflow temperature rating: 245°C
- Dual surface mount package contains both transmit and receive transformers
- Models matched to leading transceiver ICs
- 3 kV reinforced insulation barrier approved to UL

**3 kV Reinforced!**


### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

RoHS-6 Compliant Part Number	Turns Ratio (Pri:Sec ±2%)	OCL @ 25°C (mH MIN)	C <sub>w/w</sub> (pF MAX)	DCR Pri (Ω MAX)	DCR Sec (Ω MAX)	Package/ Schematic	Primary Pins
<b>T1030NL</b>	1CT:1CT & 1CT:1CT	1.20 & 1.20	15 & 15	1.00 & 1.00	1.00 & 1w.00	ZIN / 1	1-3, 6-8
<b>T1035NL</b>	1CS:1CS & 1CS:1.36CS	1.20 & 1.20	15 & 15	1.00 & 1.00	1.00 & 1.20	ZIN / 2	1-4, 5-8
<b>T1038NL</b>	1CT:1CT & 1CT:1.36CT	1.20 & 1.20	15 & 15	1.00 & 1.00	0.90 & 1.20	ZIN / 1	1-3, 6-8

## Mechanical

## Schematics

**ZIN**

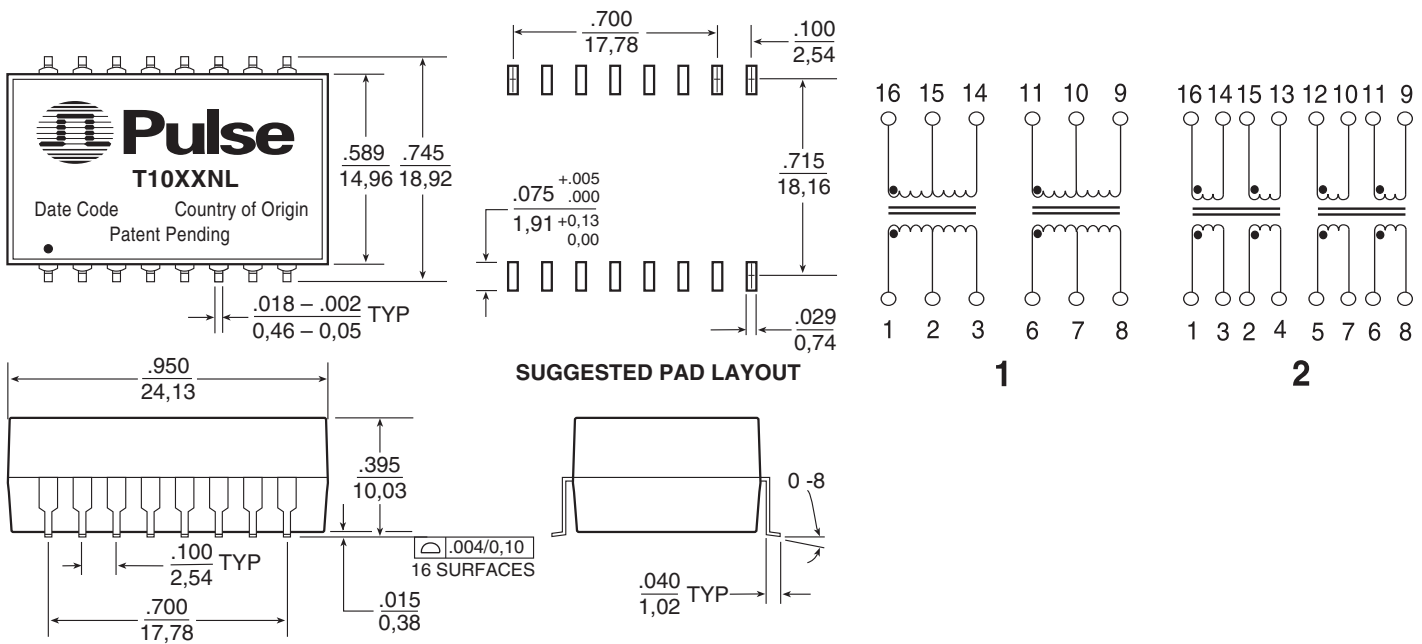

Weight ..... .8.1 grams  
 Tube ..... 20/tube  
 Tray ..... 250/tray

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
 Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,26}$

# T1/E1/CEPT/ISDN-PRI TRANSFORMERS

## Reinforced Insulation, 3 kVrms, SMT




### Application Notes

#### 1. Safety Standards Recognition

All transformers listed on this data sheet are UL1459, UL1950, CS950 approved per Underwriters Laboratories – file E133523, Reinforced Insulation.

#### 2. Crosstalk Attenuation

The dual packages contain transmit and receive transformers side by side, sufficient crosstalk attenuation is achieved by the inherent characteristics of the toroid cores as well as by their proper positioning. The crosstalk attenuation is typically 55 dB or better from 100 kHz to 10 MHz. This result was established with the test circuit shown here:

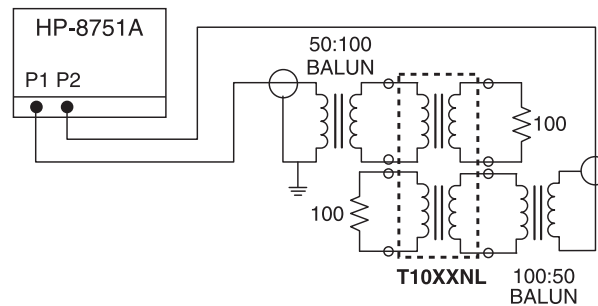

#### 3. Common Mode Chokes

The “high-frequency” 4-line common mode chokes, in the chart below, provide an effective means of compliance with national and international regulations on EMI. They are designed to be used in conjunction with Pulse’s T1/CEPT transformers. Crosstalk is typically – 70 dB at 1 MHz and – 55 dB at 10 MHz.

### High Frequency Common Mode Chokes for Telecom Applications (4-Lines)

#### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Pulse Part Number	Turns Ratio (±5%)	OCL (μH MIN)	Cw/w (pF MAX)	L <sub>L</sub> (μH MAX)	DCR (Ω MAX)	Isolation (Vrms MIN)	Package
PE-65554NL	1:1:1:1	24.0	15	.20	0.30	500	Through Hole
PE-65555NL	1:1:1:1	8.0	10	.20	0.25	500	Through Hole
PE-65854NL	1:1:1:1	47.0	16	.20	0.30	500	Surface Mount
PE-65857NL	1:1:1:1	24.0	15	.23	0.30	500	Surface Mount

**Note:** Additional common mode chokes to improve EMI performance are available. See the “Common Mode Choke Catalog,” for mechanicals and schematics on the data sheet menu on the pulse web site: <http://www.pulseeng.com/index.php?848>, under “Pulse Catalog and General Catalogs.”

### For More Information:

#### Pulse Worldwide Headquarters

12220 World Trade Dr.  
San Diego, CA 92128  
U.S.A.

[www.pulseeng.com](http://www.pulseeng.com)

Tel: 858 674 8100  
Fax: 858 674 8262

#### Pulse Europe

Einsteinstrasse 1  
D-71083 Herrenberg  
Germany

Tel: 49 7032 7806 0  
Fax: 49 7032 7806 135

#### Pulse China Headquarters

B402, Shenzhen Academy of  
Aerospace Technology Bldg.  
10th Kejinan Rd.  
High-Tech Zone  
Nanshan District  
Shenzen, PR China 518057

TEL: 86 755 33966678  
FAX: 86 755 33966700

#### Pulse North China

Room 1503  
XinYin Building  
No. 888 YiShan Rd.  
Shanghai 200233  
China

Tel: 86 21 54643211/2  
Fax: 86 21 54643210

#### Pulse South Asia

135 Joo Seng Rd.  
#03-02  
PM Industrial Bldg.  
Singapore 368363

TEL: 65 6287 8998  
FAX: 65 6280 0080

#### Pulse North Asia

No. 26, Kao Ching Rd.  
Yang Mei Chen  
Taoyuan Hsien  
Taiwan  
R. O. C.

Tel: 886 3 4643715  
Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2009. Pulse Engineering, Inc. All rights reserved.