


REV. 1 10/24/96

COIL: 26.5 VDC	
WINDING #1	WINDING #2
1000 OHMS ± 10% @ 25° C	1000 OHMS ± 10% @ 25° C
13.0 VDC MUST OPERATE	13.0 VDC MUST OPERATE

CUSTOMER DATA SHEET

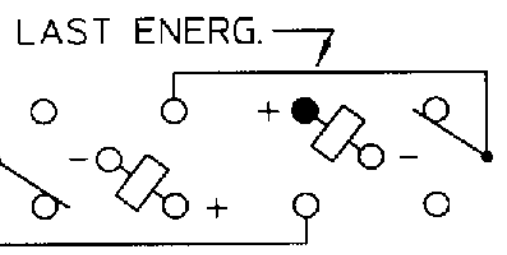

ENVIRONMENT:
 VIBRATION 10 CPS TO 2500 CPS @ 30 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: 2 AMPS 30 VDC
RESISTIVE 100,000 OPERATIONS

NOTES: OTHER SPECIFICATIONS IN ACCORDANCE
WITH MIL-R-39016/45

DR. R.B. 3/9/95 CK 10/24/96



CUST. COMMERCIAL EQUIV.
 CUST. NO. M39016/45-020M TYPE "LS" RELAY

LS-9520M