


REV. 1  
DCO 63333

COIL: @ 25°C	
RESISTANCE	25 OHMS ±10%
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	3.2 VDC
MUST RELEASE	2.1 VDC MAX. 0.46 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 15 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 7 MS MAX.  
(INCLUDING BOUNCE)

CUSTOMER DATA SHEET

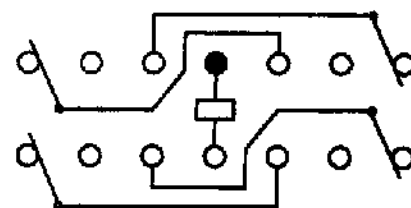

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMP 28 VDC RESISTIVE
	100,000 OPERATIONS

DR. R.B. 4/20/98 CK. TLG 10-24-00

**CII Technologies**  
advanced control electronic solutions

CUST. QPL  
CUST. NO. M39016/40-006 REV.

"SR" RELAY

SR-7606