


Current Transducer LTS 25-NP

$I_{PN} = 8 - 12 - 25 \text{ A}$

For the electronic measurement of currents : DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



Preliminary



Electrical data

I_{PN}	Primary nominal r.m.s. current	25	At
I_p	Primary current, measuring range	0 .. ± 80	At
V_{OUT}	Analog output voltage	$I_p = 0$	2.5 ¹⁾ V
		$\pm I_{PN}$	2.5 \pm 0.625 V
N_s	Number of secondary turns ($\pm 0.1 \%$)	2000	
R_L	Load resistance	≥ 2	k Ω
R_{IM}	Internal measuring resistance ($\pm 0.5 \%$)	50	Ω
TCR_{IM}	Thermal drift of R_{IM}	< 50	ppm/K
V_C	Supply voltage ($\pm 5 \%$)	5	V
I_C	Current consumption @ $V_C = 5 \text{ V}$	Typ 20 + I_s	mA
V_d	R.m.s. voltage for AC isolation test, 50/60 Hz, 1 mn	2.5	kV
V_b	R.m.s. rated voltage	525 ²⁾	V

Features

- Closed loop (compensated) multi-range current transducer using the Hall effect
- Unipolar voltage supply
- Insulated plastic case recognized according to UL 94-V0
- Compact design for PCB mounting
- Incorporated measuring resistance
- Extended measuring range.

Advantages

- Excellent accuracy
- Very good linearity
- Very low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , $T_A = 25^\circ\text{C}$	± 0.2	%
	Accuracy with R_{IM} @ I_{PN} , $T_A = 25^\circ\text{C}$	± 0.7	%
e_L	Linearity	< 0.1	%
TCV_{OUT}	Thermal drift of V_{OUT} @ $I_p = 0$	- 10°C .. + 85°C	Typ 50 Max 100 ppm/K
		- 10°C .. + 85°C	50 ³⁾ 50 ³⁾ ppm/K
TCe_G	Thermal drift of the gain	- 10°C .. + 85°C	50 ³⁾ ppm/K
			± 0.5 mV
			± 2.0 mV
V_{OM}	Residual voltage @ $I_p = 0$, after an overload of $3 \times I_{PN}$	$5 \times I_{PN}$	± 2.0 mV
		$10 \times I_{PN}$	± 2.0 mV
			± 2.0 mV
t_{ra}	Reaction time @ 10 % of $I_{p \text{ max}}$	< 50	ns
t_r	Response time @ 90 % of $I_{p \text{ max}}$	< 200	ns
di/dt	di/dt accurately followed	> 100	A/ μ s
f	Frequency bandwidth (0 .. - 0.5 dB)	DC .. 100	kHz
		DC .. 200	kHz

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

General data

T_A	Ambient operating temperature	- 10 .. + 85	$^\circ\text{C}$
T_S	Ambient storage temperature	- 25 .. + 100	$^\circ\text{C}$
m	Mass	10	g
	Standards	EN 50178	

Notes : ¹⁾ Absolute value @ $T_A = 25^\circ\text{C}$, $2.4875 < V_{OUT} < 2.5125$


²⁾ Pollution class 2, category III

³⁾ Only due to TCR_{IM}

Copyright protected.

981222/4

Dimensions LTS 25-NP (in mm. 1 mm = 0.0394 inch)

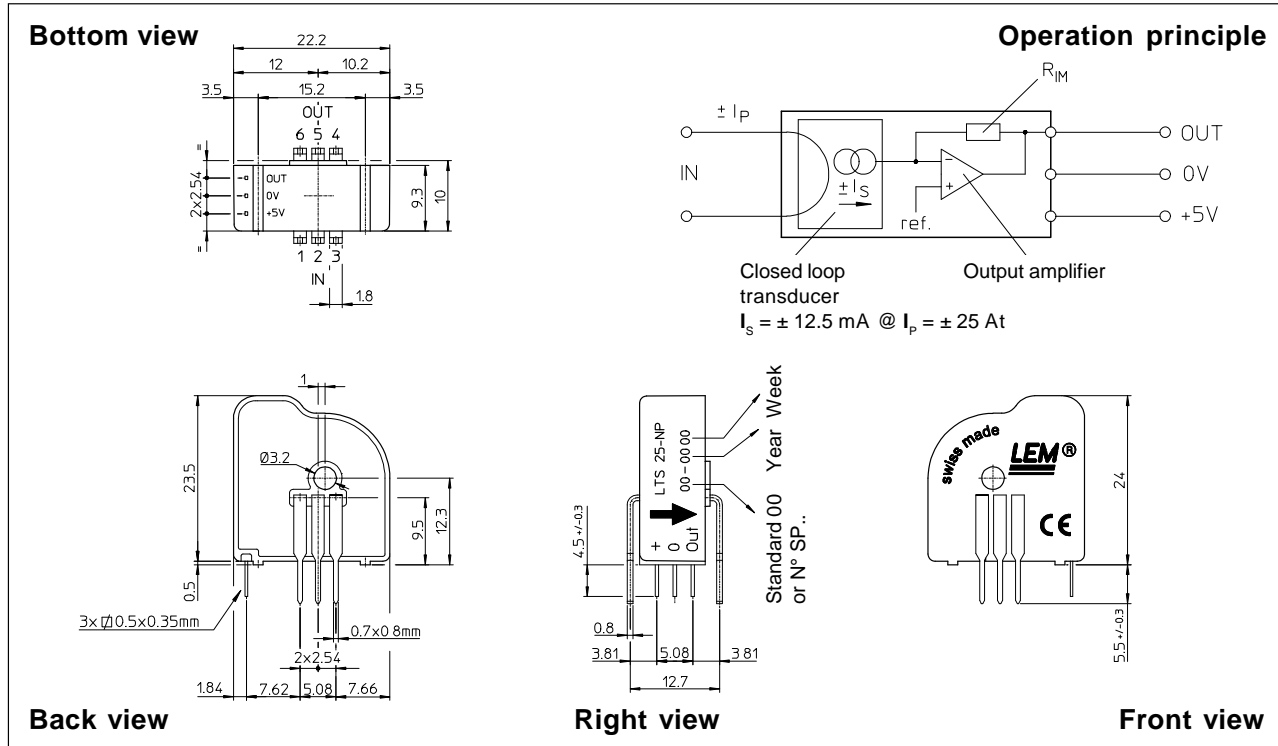

Number of primary turns	Primary nominal r.m.s. current I_{PN} [A]	Nominal output voltage V_{OUT} [V]	Primary resistance R_p [mΩ]	Primary insertion inductance L_p [μH]	Recommended connections
1	± 25	2.5 ± 0.625	0.18	0.013	
2	± 12	2.5 ± 0.600	0.81	0.05	
3	± 8	2.5 ± 0.600	1.62	0.12	


Mechanical characteristics

- General tolerance ± 0.2 mm
- Fastening & connection of primary 6 pins 0.7 x 0.8 mm
Recommended PCB hole 1.3 mm
- Fastening & connection of secondary 3 pins 0.5 x 0.35 mm
Recommended PCB hole 0.8 mm
- Additional primary through-hole Ø 3.2 mm

Remark

- V_{OUT} is positive when I_p flows from terminals 1, 2, 3 to terminals 6, 5, 4

Output Voltage - Primary Current

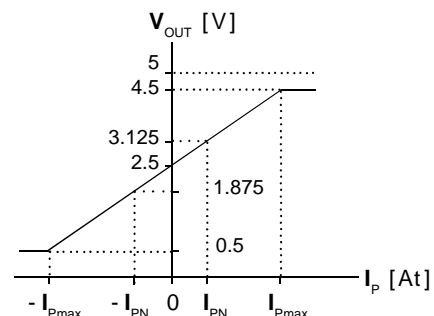

LEM reserves the right to carry out modifications on its transducers, in order to improve them, without previous notice.