

MOS FET Relays


G3VM-2(F)L

Analog-switching MOS FET Relays with 350-V Load Voltage and Current Limit.

- A 4-pin Relay available with the same terminal-pin position as 4-pin photocouplers.
- Approved standards: UL1577 (File No. E80555)
- RoHS Compliant.

■ Application Examples

- Electronic automatic exchange systems
- Cordless telephones
- Multi-functional telephones
- Measurement devices

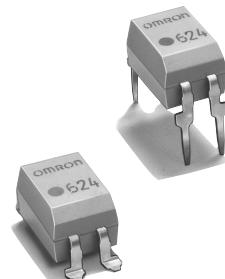

Note: The actual product is marked differently from the image shown here.


■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Current limit	Number per stick	Number per tape
SPST-NO	PCB terminals	350 VAC	G3VM-2L	Yes	100	---
	Surface-mounting terminals		G3VM-2FL		---	1,500
			G3VM-2FL(TR)		---	1,500


■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-2L

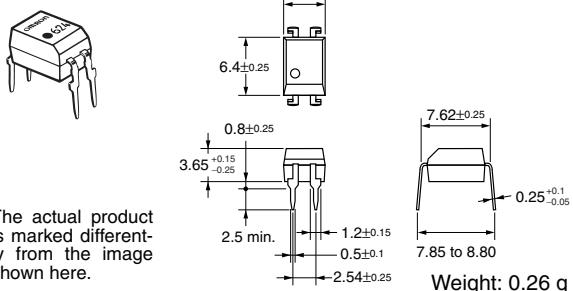


G3VM-2FL

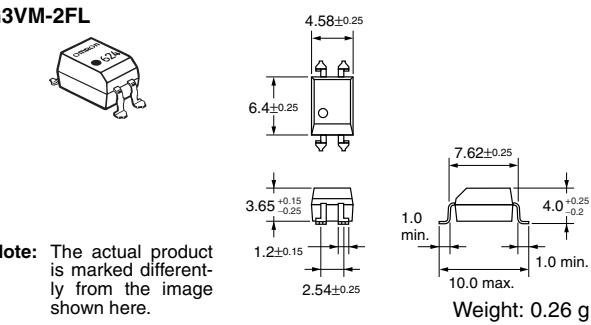


■ Terminal Arrangement/Internal Connections (Top View)

G3VM-2L




G3VM-2FL




■ PCB Dimensions (Bottom View)

G3VM-2L

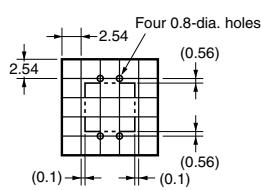

■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-2FL



■ Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Item	Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	I_F	50	mA
	Repetitive peak LED forward current	I_{FP}	1	A
	LED forward current reduction rate	$\Delta I_F/\text{ }^\circ\text{C}$	-0.5	mA/ $^\circ\text{C}$
	LED reverse voltage	V_R	6	V
Output	Connection temperature	T_j	125	$^\circ\text{C}$
	Load voltage (AC peak/DC)	V_{OFF}	350	V
	Continuous load current	I_O	120	mA
	ON current reduction rate	$\Delta I_{ON}/\text{ }^\circ\text{C}$	-1.2	mA/ $^\circ\text{C}$
Dielectric strength between input and output (See note 1.)		V_{I-O}	2,500	V_{rms}
Operating temperature		T_a	-40 to +85	$^\circ\text{C}$
Storage temperature		T_{stg}	-55 to +125	$^\circ\text{C}$
Soldering temperature (10 s)		---	260	$^\circ\text{C}$
				10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■ Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V_F	1.0	1.15	1.3	V
	Reverse current	I_R	---	---	10	μA
	Capacity between terminals	C_T	---	30	---	pF
	Trigger LED forward current	I_{FT}	---	1	3	mA
Output	Maximum resistance with output ON	R_{ON}	---	22	35	Ω
	Current leakage when the relay is open	I_{LEAK}	---	0.0005	1.0	μA
	Capacity between terminals	C_{OFF}	---	40	---	pF
Limit current		I_{LIM}	150	---	300	mA
Capacity between I/O terminals		C_{I-O}	---	0.8	---	pF
Insulation resistance		R_{I-O}	1,000	---	---	$M\Omega$
Turn-ON time		t_{ON}	---	0.25	1.0	ms
Turn-OFF time		t_{OFF}	---	0.15	1.0	ms

Note: 2. Turn-ON and Turn-OFF Times

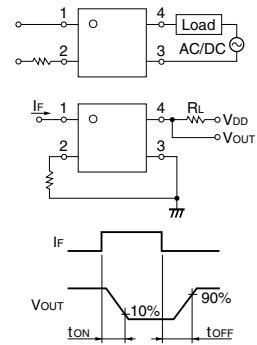


■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	---	---	280	V
Operating LED forward current	I_F	5	7.5	25	mA
Continuous load current (AC peak/DC)	I_O	---	---	100	mA
Operating temperature	T_a	-20	---	65	$^\circ\text{C}$

■ Engineering Data

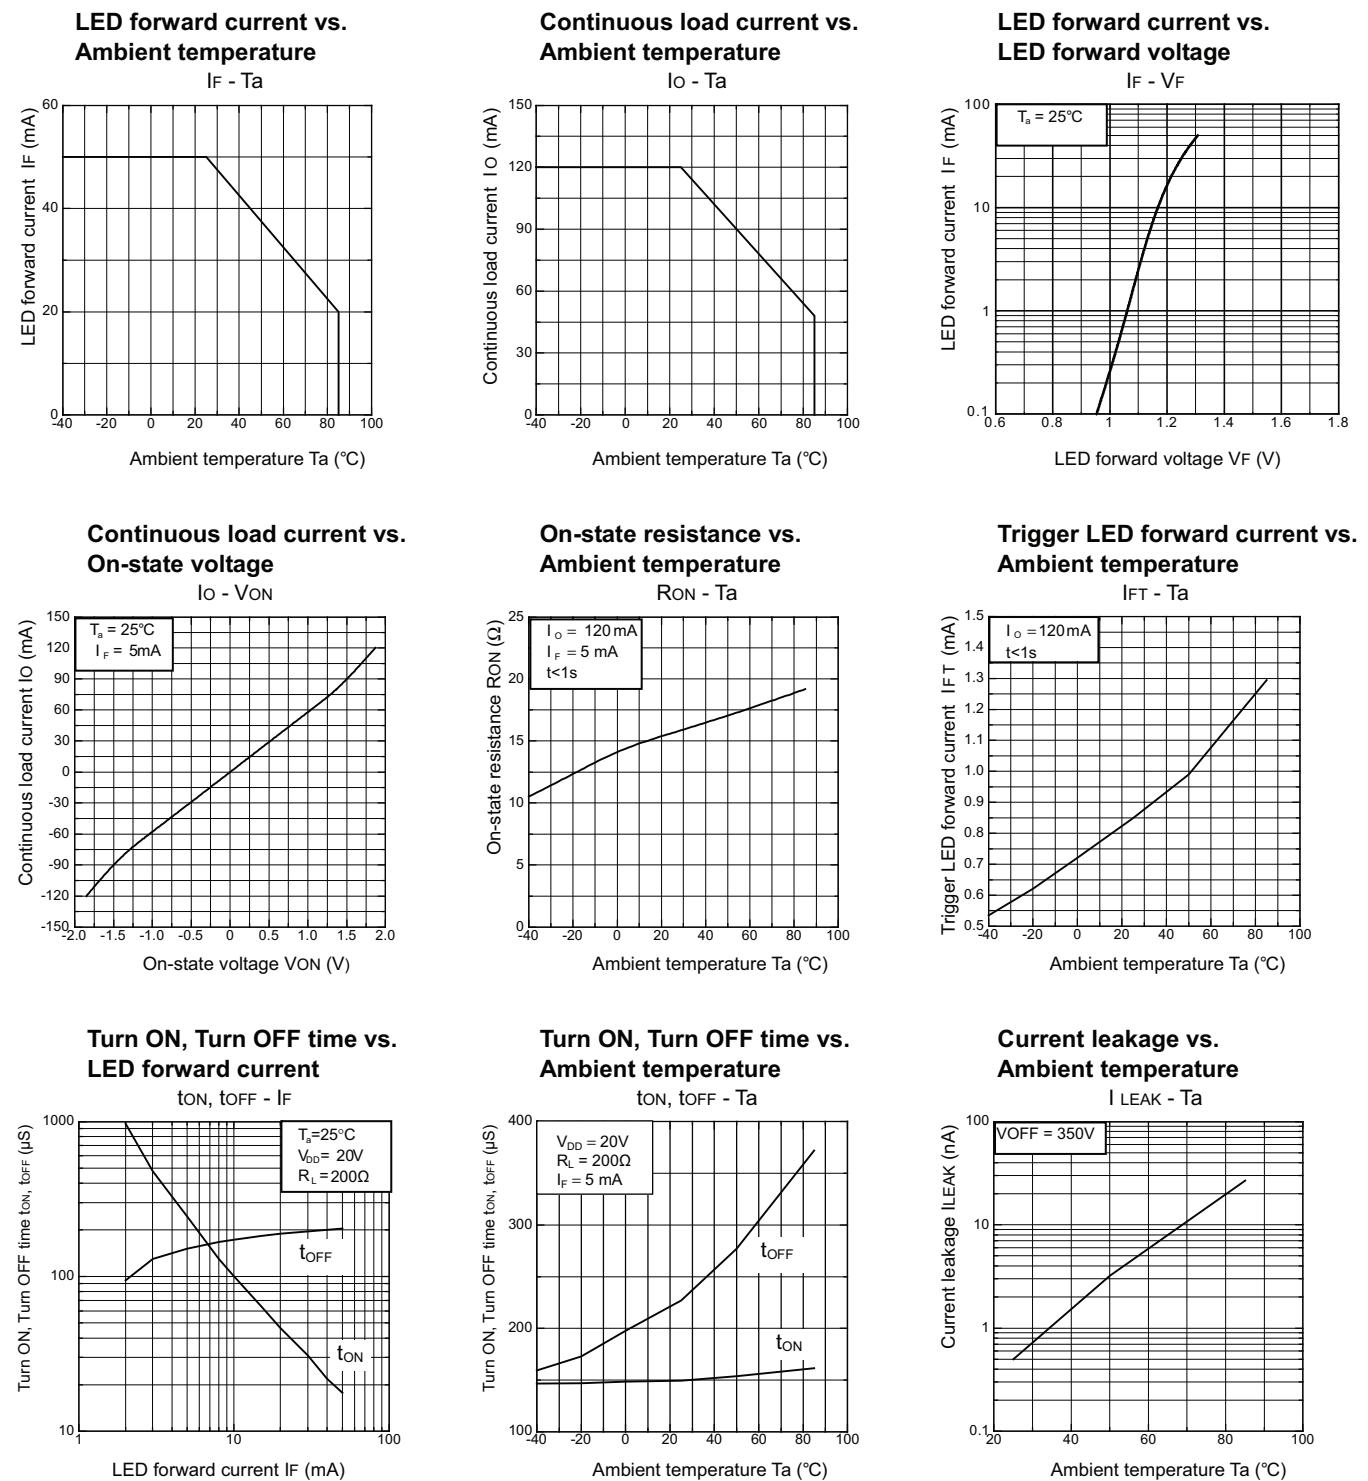

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



**OMRON ELECTRONIC
COMPONENTS LLC**
55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.components.omron.com>

Printed in USA

MOS FET Relays **G3VM-2(F)L**