



Normally closed
SOP6-pin type
of 400V load voltage

PhotoMOS Relays
GU SOP 1 Form B
(AQV414S)



mm inch




Compliance with RoHS Directive

FEATURES


1. Miniature SOP6-pin package

The device comes in a small SOP measuring (W) 4.4 × (L) 6.3 × (H) 2.1 mm (W) .173 × (L) .248 × (H) .083 inch approx. 25% of the volume and 50% of the footprint size of DIP type.

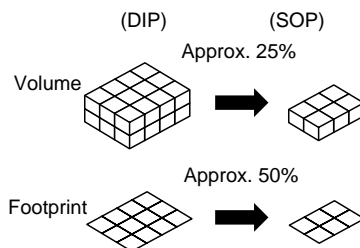

2. Low on-resistance (typ. 26 Ω) for normally-closed type

This has been achieved thanks to the built-in MOSFET processed by our proprietary method, DSD (Double-Diffused and Selective Doping) method.

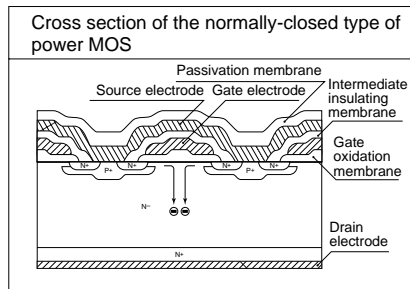

3. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

4. Low-level off state leakage current of max. 1 μA

TYPICAL APPLICATIONS

- Telephones
- Measuring instruments
- Computers
- Industrial robots
- High-speed inspection machines

TYPES

	Output rating*		Package	Part No.			Packing quantity	
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel
					Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side		
AC/DC dual use	400V	100mA	SOP6-pin	AQV414S	AQV414SX	AQV414SZ	1 tube contains: 75 pcs. 1 batch contains: 1,500 pcs.	1,000 pcs.

* Indicate the peak AC and DC values.

Note: For space reasons, only "V41S" is marked on the product. The two initial letters of the part number "AQ" and the packing style indicator "X" or "Z" have been omitted.

RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV414S	Remarks	
Input	LED forward current	I_F	50 mA		
	LED reverse voltage	V_R	5 V		
	Peak forward current	I_{FP}	1 A	f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P_{in}	75 mW		
Output	Load voltage (peak AC)	V_L	400 V		
	Continuous load current	I_L	A	0.10 A	A connection: Peak AC, DC B, C connection: DC
			B	0.11 A	
			C	0.12 A	
	Peak load current	I_{peak}		0.3 A	A connection: 100 ms (1 shot) V_L = DC
	Power dissipation	P_{out}		450 mW	
	Total power dissipation	P_T		500 mW	
I/O isolation voltage	V_{iso}		1,500 V AC		
Temperature limits	Operating	T_{opr}	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures	
	Storage	T_{stg}	-40°C to +100°C -40°F to +212°F		

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV414S	Remarks			
Input	LED operate (OFF) current	I_{Foff}	0.6 mA	I_L = Max.			
			Maximum		3 mA		
	LED reverse (ON) current	I_{Fon}	Minimum	0.4 mA	I_L = Max.		
			Typical	0.55 mA			
LED dropout voltage	V_F	—	Typical	1.25 V (1.14 V at I_F = 5 mA)	I_F = 50 mA		
			Maximum	1.5 V			
Output	On resistance	R_{on}	A	Typical	26 Ω	I_F = 0 mA I_L = Max. Within 1 s on time	
				Maximum	50 Ω		
		R_{on}	B	Typical	20 Ω	I_F = 0 mA I_L = Max. Within 1 s on time	
				Maximum	25 Ω		
		R_{on}	C	Typical	10 Ω	I_F = 0 mA I_L = Max. Within 1 s on time	
				Maximum	12.5 Ω		
Off state leakage current	Maximum	I_{Leak}	—	1 μ A	I_F = 5 mA, V_L = Max.		
Transfer characteristics	Operate (OFF) time*	T_{off}	—	Typical	0.47 ms	I_F = 0 mA \rightarrow 5 mA V_L = Max.	
				Maximum	1.0 ms		
	Reverse (ON) time*	T_{on}	—	—	Typical	0.28 ms	I_F = 5 mA \rightarrow 0 mA V_L = Max.
					Maximum	1.0 ms	
	I/O capacitance	Typical	C_{iso}	—	0.8 pF	f = 1 MHz	
Initial I/C isolation resistance	Minimum	R_{iso}	—	1.5 pF	V_B = 0 V		
				1,000 M Ω	500 V DC		

*Operate/Reverse time

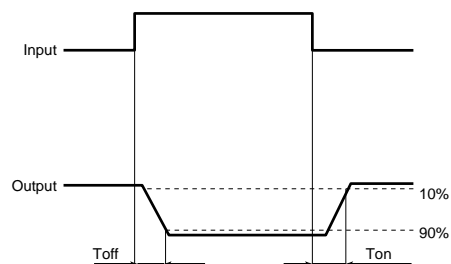

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper relay operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I_F	5	mA

■ For Dimensions

■ For Schematic and Wiring Diagrams

■ For Cautions for Use

■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Electric Works technical representative.

For more information


GU SOP 1 Form B (AQV414S)

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

Type of connection: A

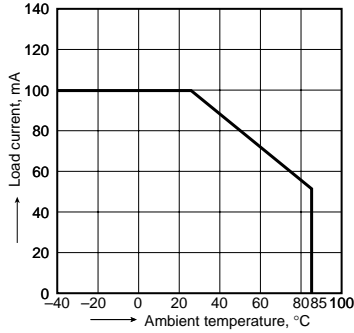


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
 LED current: 0 mA;
 Continuous load current: 100 mA (DC)

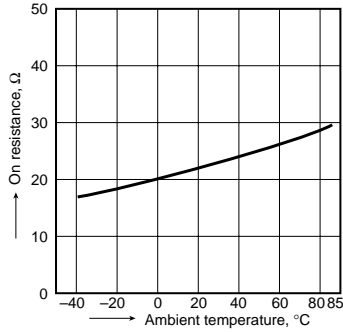


3. Operate (OFF) time vs. ambient temperature characteristics

LED current: 5 mA;
 Load voltage: 400 V (DC);
 Continuous load current: 100 mA (DC)

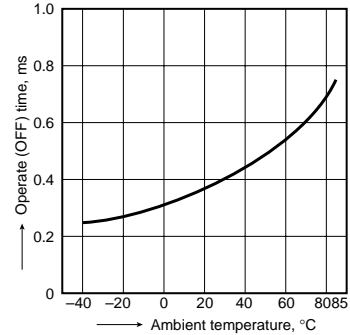


4. Reverse (ON) time vs. ambient temperature characteristics

LED current: 50 mA;
 Load voltage: 400 V (DC);
 Continuous load current: 100 mA (DC)

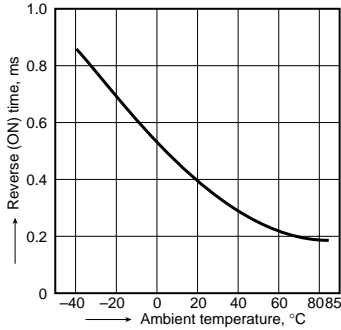


5. LED operate (OFF) current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
 Continuous load current: 100 mA (DC)

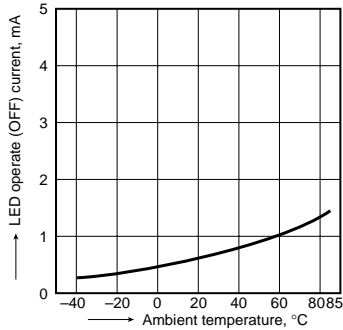


6. LED reverse (ON) current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
 Continuous load current: 100 mA (DC)

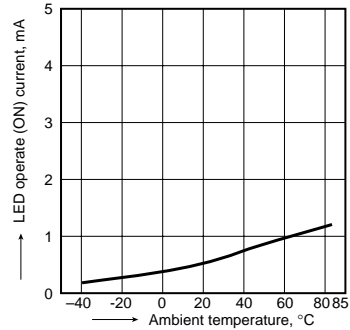


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

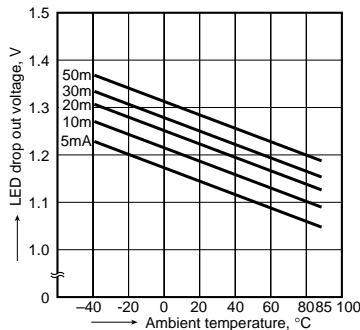


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F

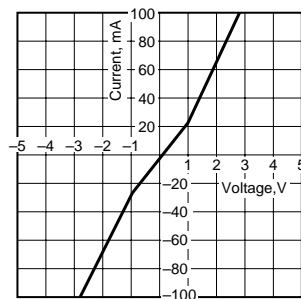


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
 LED current: 5 mA;
 Ambient temperature: 25°C 77°F

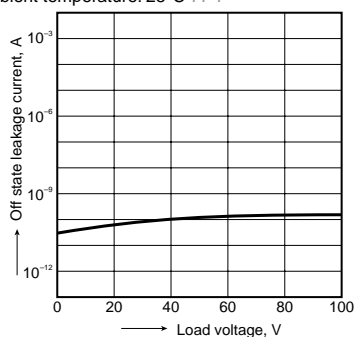


10. Operate (OFF) time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
 Load voltage: 400 V (DC); Continuous load current:
 100 mA (DC); Ambient temperature: 25°C 77°F

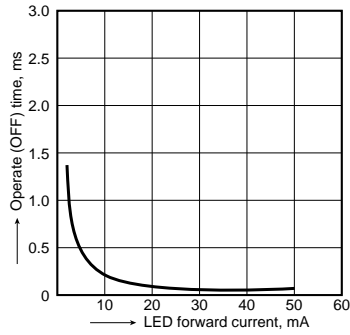

11. Reverse (ON) time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
 Load voltage: 400 V (DC); Continuous load current:
 100 mA (DC); Ambient temperature: 25°C 77°F

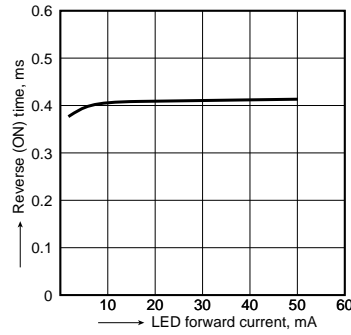

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
 Frequency: 1 MHz;
 Ambient temperature: 25°C 77°F

