


MOS FET Relays

G3VM-401G

Analog-Switching MOS FET Relays in 400-V Load Voltage Series

- 4-pin SOP package in the 400-V load voltage series.
- Continuous load current of 120 mA.
- Dielectric strength of 1,500 Vrms between I/O.
- RoHS Compliant.

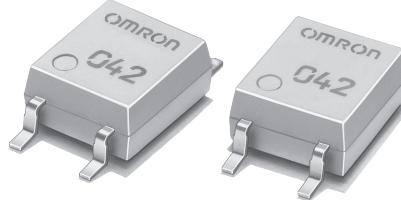

Note: The actual product is marked differently from the image shown here.

■ Application Examples

- Broadband systems
- Measurement devices and Data loggers
- Amusement machines

■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NO	Surface-mounting terminals	400 VAC	G3VM-401G	100	---
			G3VM-401G(TR)	---	2,500


■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-401G




Note: The actual product is marked differently from the image shown here.

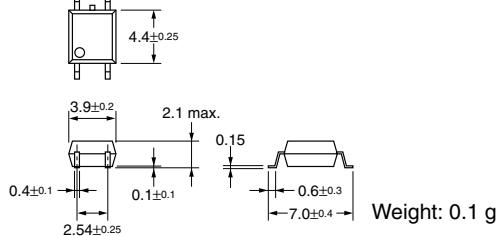


■ Terminal Arrangement/Internal Connections (Top View)

G3VM-401G



■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-401G



■ Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	I _F	50	mA
	Repetitive peak LED forward current	I _{FP}	1	A
	LED forward current reduction rate	Δ I _F /°C	-0.5	mA/°C
	LED reverse voltage	V _R	5	V
	Connection temperature	T _j	125	°C
Output	Load voltage (AC peak/DC)	V _{OFF}	400	V
	Continuous load current	I _O	120	mA
	ON current reduction rate	Δ I _{ON} /°C	-1.2	mA/°C
Dielectric strength between input and output (See note 1.)	V _{I-O}	1,500	V _{rms}	AC for 1 min
Operating temperature	T _a	-40 to +85	°C	With no icing or condensation
Storage temperature	T _{stg}	-55 to +125	°C	With no icing or condensation
Soldering temperature (10 s)	---	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■ Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V _F	1.0	1.15	1.3	V I _F = 10 mA
	Reverse current	I _R	---	---	10	μA V _R = 5 V
	Capacity between terminals	C _T	---	30	---	pF V = 0, f = 1 MHz
	Trigger LED forward current	I _{FT}	---	1	3	mA I _O = 120 mA
Output	Maximum resistance with output ON	R _{ON}	---	17	35	Ω I _F = 5 mA, I _O = 120 mA
	Current leakage when the relay is open	I _{LEAK}	---	0.003	1.0	μA V _{OFF} = 400 V
	Capacity between terminals	C _{OFF}	---	70	---	pF V = 0, f = 1 MHz
Capacity between I/O terminals	C _{I-O}	---	0.8	---	pF f = 1 MHz, V _s = 0 V	
Insulation resistance	R _{I-O}	1,000	---	---	MΩ V _{I-O} = 500 VDC, R _{OH} ≤ 60%	
Turn-ON time	t _{ON}	---	0.3	1	ms I _F = 5 mA, R _L = 200 Ω, V _{DD} = 20 V (See note 2.)	
Turn-OFF time	t _{OFF}	---	0.1	1	ms	

Note: 2. Turn-ON and Turn-OFF Times

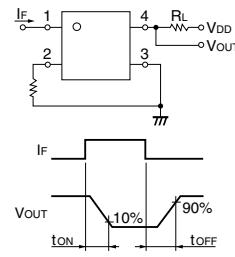


■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V _{DD}	---	---	320	V
Operating LED forward current	I _F	5	7.5	25	mA
Continuous load current (AC peak/DC)	I _O	---	---	120	mA
Operating temperature	T _a	-20	---	65	°C

■ Engineering Data

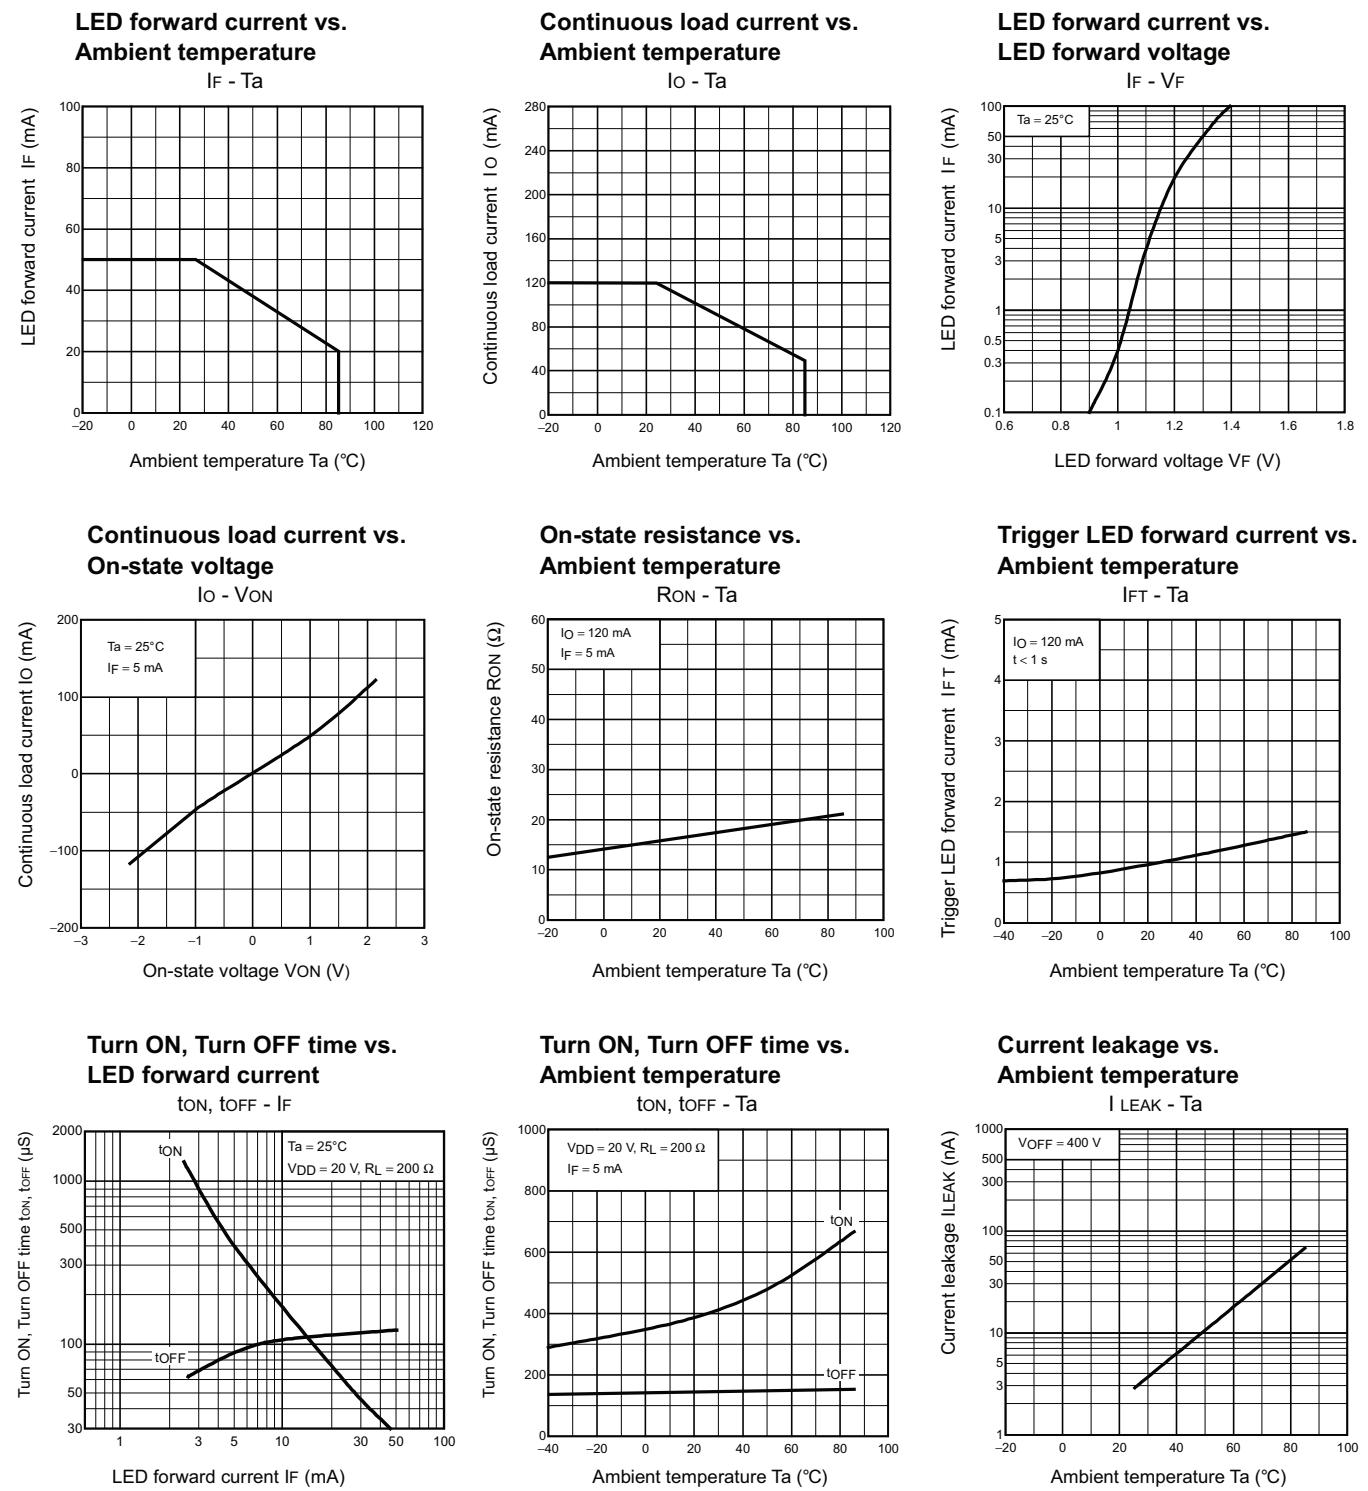

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



**OMRON ELECTRONIC
COMPONENTS LLC**
55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.components.omron.com>

Printed in USA

MOS FET Relays **G3VM-401G**