

## NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input      0.6 Vdc - 5.0 Vdc/40 A Output



**xRP2-40E1A0      RoHS Compliant      Rev.C**

- Non-Isolated
- High Efficiency
- Fixed Switching Frequency
- Low Cost
- Excellent Thermal Performance
- Wide Input Voltage Range
- Wide Output Trim Range
- Output Over-Voltage Shutdown
- OCP/SCP
- Low Output Ripple
- Power Good Signal
- Remote On/Off



### Description

The xRP2-40E1A0 is a non-isolated dc/dc converter that operates over a wide range of input voltage ( $V_{in} = 5 \text{ Vdc} - 13.8 \text{ Vdc}$ ). This unit can provide a precisely regulated output voltage from 0.6 Vdc to 5.0 Vdc and can deliver up to 40 A of output current. This unit is designed to be highly efficient and low cost. The converter is provided in an industry standard package.

### Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency ( $V_o=1.8 \text{ Vdc}$ )	Part Number Horizontal Mount	Part Number Vertical Mount
0.6 V - 5.0 V	5.0 V - 13.8 V	40 A	200 W	87%	0RP2-40E1A0	VRP2-40E1A0

**Notes:** 1. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.  
2. Add "G" suffix at the end of the model numbers listed above to indicate "Tray Packaging".

### Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	15 V	
Output Enable Terminal Voltage	-0.3 V	-	15 V	
Ambient Temperature	0 °C	-	70 °C	
Storage Temperature	-55 °C	-	125 °C	

### Input Specifications

Parameter	Min	Typ	Max	Notes	
Input Voltage	$V_o \leq 2.8 \text{ V}$ $V_o > 2.8 \text{ V}$	5 V $1.8 \cdot V_o$	12 V 12 V	13.8 V 13.8 V	
Input Current (full load)	-	-	30 A		
Input Reflected Ripple Current (pk-pk)	-	35 mA	-	With simulated source impedance of 1 uH, 5 Hz to 20 MHz. Use a 1000 uF/16 V electrolytic capacitor with ESR=0.1 ohm max, at 100 kHz at 25°C.	
Input Reflected Ripple Current (rms)	-	10 mA	-		
$I^2t$ Inrush Current Transient	-	-	1 A <sup>2</sup> s		
Turn-on Voltage Threshold	4.4 V	4.6 V	4.8 V		
Under Voltage Threshold	4.0 V	4.3 V	4.6 V		

**Note:** All specifications are typical at 25 °C unless otherwise stated.

**NON-ISOLATED DC/DC CONVERTERS**  
 5 Vdc - 13.8 Vdc Input      0.6 Vdc - 5.0 Vdc/40 A Output



**Output Specifications**

Parameter	Min	Typ	Max	Notes	
Output Voltage Set Point $V_o \geq 1\text{ V}$ $V_o < 1\text{ V}$	-1.5 % $V_o$ -10 mV	- -	+1.5 % $V_o$ +10 mV	$V_{in} = V_{inmin}$ , $I_o = I_{omax}$	
Load Regulation $V_o \geq 2.5\text{ V}$ $V_o < 2.5\text{ V}$	- -	- -	0.6% $V_o$ 12 mV		
Line Regulation $V_o \geq 2.5\text{ V}$ $V_o < 2.5\text{ V}$	- -	- -	0.3% $V_o$ 9 mV		
Regulation Over Temperature (0 °C to +70 °C)	-	-	0.02% $V_o/C$		
Output Current	0 A	-	40 A		
Current Limit Threshold	105% $I_o$	130% $I_o$	160% $I_o$		
Output Ripple and Noise (pk-pk) $V_o = 5.0\text{ V}$ $V_o = 3.3\text{ V}$ $V_o = 2.5\text{ V}$ $V_o = 1.5\text{ V}$ $V_o = 1.0\text{ V}$ $V_o = 0.6\text{ V}$	- - - - - -	- - - - - -	120 mV 60 mV 40 mV 40 mV 30 mV 30 mV	Test conditions: 0-20MHz BW, with a 1µF ceramic capacitor and a 10 uF Tantalum cap at output.	
Output Ripple and Noise (rms) $V_o = 5.0\text{ V}$ $V_o = 3.3\text{ V}$ $V_o = 2.5\text{ V}$ $V_o = 1.5\text{ V}$ $V_o = 1.0\text{ V}$ $V_o = 0.6\text{ V}$	- - - - - -	- - - - - -	30 mV 30 mV 20 mV 20 mV 15 mV 15 mV		
Turn On Time	-	-	10 mS		
Rise Time	-	-	3 mS		
Overshoot at Turn on and off	-	-	0.5%		
Output Capacitance $ESR \geq 1\text{ m}\Omega$	0 uF	-	4700 uF		
<b>Transient Response</b>					
0% ~ 50% Max Load	$V_o = \text{All}$	-	-	300 mV	Test conditions: $di/dt = 10\text{ A/uS}$ ; $V_{in} = 12\text{ V}$ ;
Settling Time		-	-	100 uS	
50% ~ 0% Max Load		-	-	300 mV	
Settling Time		-	-	100 uS	

**Note:** All specifications are typical at 25 °C unless otherwise stated.

# NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 13.8 Vdc Input      0.6 Vdc - 5.0 Vdc/40 A Output



## General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency Vo=5.0 V Vo=3.3 V Vo=2.5 V Vo=1.8 V Vo=1.5 V Vo=1.2 V Vo=1.0 V Vo=0.6 V	91%	94%	-	Measured at Vin=12 V, full load.
	89%	92%	-	
	87%	90%	-	
	84%	87%	-	
	82%	85%	-	
	79%	82%	-	
	76%	79%	-	
68%	71%	-		
Switching Frequency	-	500 kHz	-	
Output Voltage Trim Range	0.6 V	-	5 V	Trim pin is open, Vo = 0.6 V.
Over Voltage Protection	110% Vo,set	115%Vo,set	130%Vo,set	Vin=12 V, Io=full load.
MTBF	2,392,000 hours			Calculated Per Bell Core SR-332 (Io = 80%Iomax; Vin=12 V; Ta = 25 °C;0RP2-40E1A0)
	3,061,000 hours			Calculated Per Bell Core SR-332 (Io = 80%Iomax; Vin=12 V; Ta = 25 °C;VRP2-40E1A0)
Dimensions (horizontal mount) Inches (L x W x H) Millimeters (L x W x H)	1.45 x 1.10 x 0.50 36.83 x 27.94 x 12.7			
	Dimensions (vertical mount) Inches (L x W x H) Millimeters (L x W x H)	1.45 x 1.10 x 0.377 36.83 x 27.94 x 9.58		
Weight		-	19 g	

**Note:** All specifications are typical at 25 °C unless otherwise stated.


## Control Specifications

Parameter	Min	Typ	Max	Notes
<b>Remote On/Off (Active High)</b>				
Signal Low (Unit Off)	-0.3 V	-	0.8 V	Remote On/Off pin is open, unit is off.
Signal High (Unit On)	2.0 V	-	Vin,max	
Current Source/Sink	0 mA	-	3.3 mA	
<b>PwGood (PowerGood)</b>				
PwGood = High = Power Good	2.4 V	-	5.25 V	
	-	-	2 mA	
PwGood = Low = Power Not Good	0 V	-	0.4 V	
	-	-	4 mA	

## Output Trim Equation

The Trim resistor should be connected between the Trim+ pin and Trim- pin.

$$R_{trim} = \frac{1.2}{V_o - 0.6} (K\Omega)$$




# NON-ISOLATED DC/DC CONVERTERS


5 Vdc - 13.8 Vdc Input      0.6 Vdc - 5.0 Vdc/40 A Output




## Efficiency Data

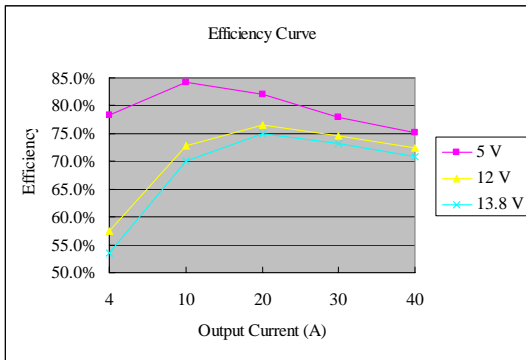


Vout = 0.6 V

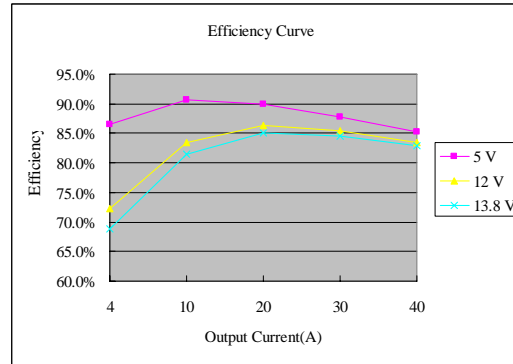


Vout = 1.2 V

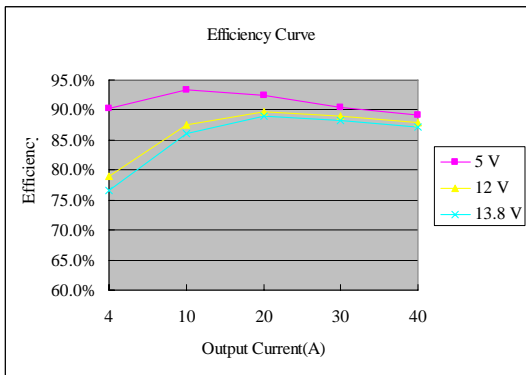


Vout = 1.8 V

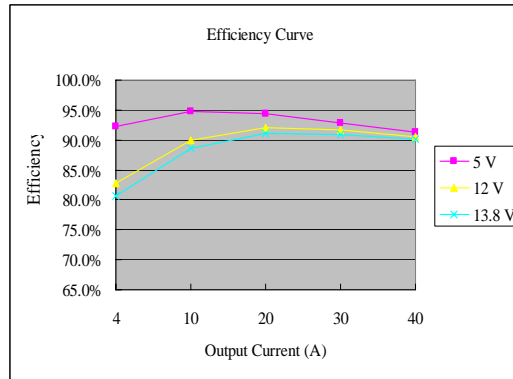

Vout = 2.5 V

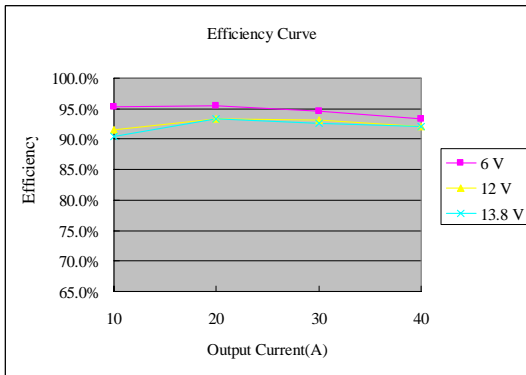

Vout = 3.3 V

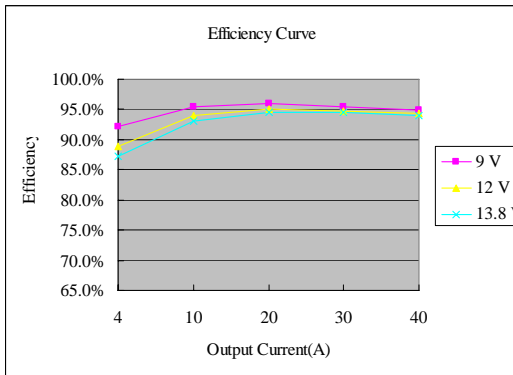


Vout = 5.0 V

# NON-ISOLATED DC/DC CONVERTERS


5 Vdc - 13.8 Vdc Input      0.6 Vdc - 5.0 Vdc/40 A Output




## Thermal Derating Curves

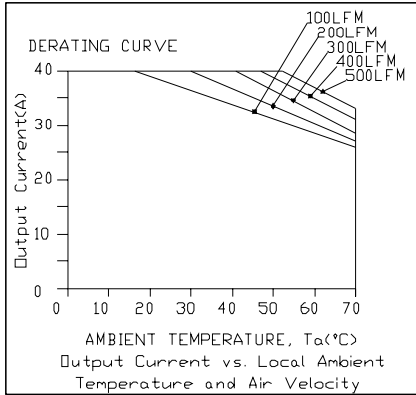


$V_{in}=12\text{ V}, V_o=0.6\text{ V}$

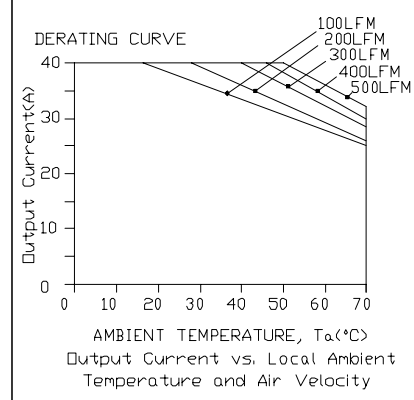


$V_{in}=12\text{ V}, V_o=1.2\text{ V}$

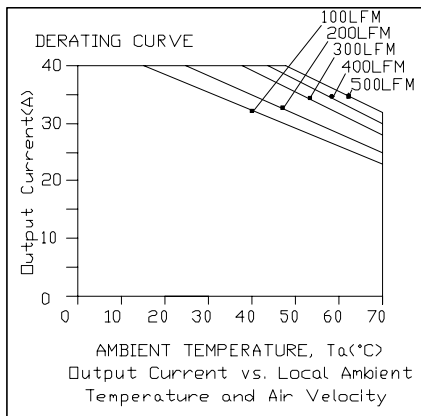


$V_{in}=12\text{ V}, V_o=1.8\text{ V}$

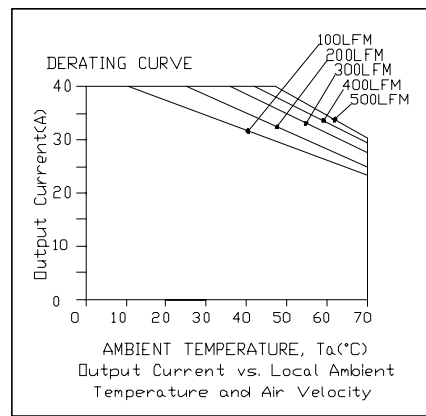

$V_{in}=12\text{ V}, V_o=2.5\text{ V}$

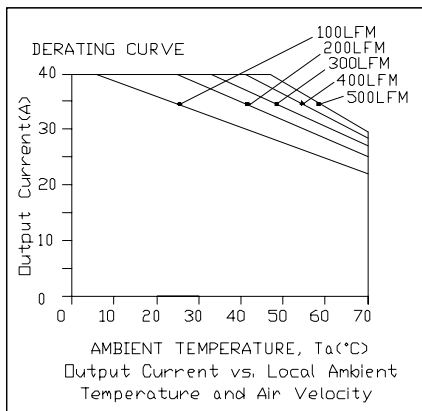

$V_{in}=12\text{ V}, V_o=3.3\text{ V}$

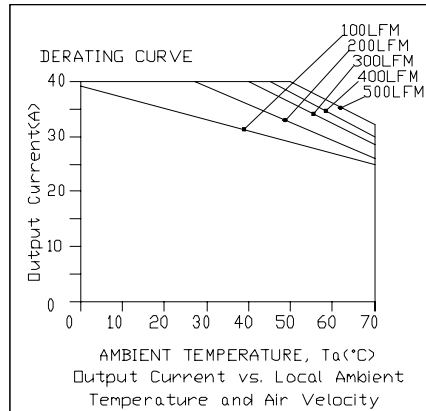


$V_{in}=12\text{ V}, V_o=5.0\text{ V}$

# NON-ISOLATED DC/DC CONVERTERS


5 Vdc - 13.8 Vdc Input      0.6 Vdc - 5.0 Vdc/40 A Output




## Ripple and Noise Waveforms

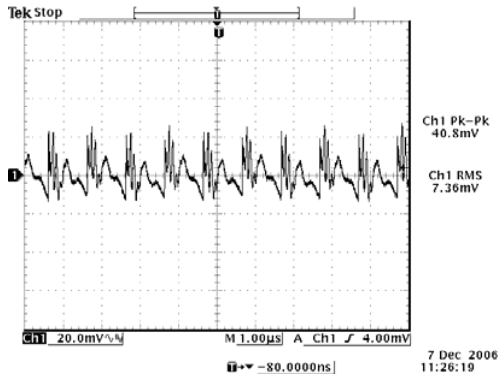


12 Vdc input, 0.6 Vdc/40 A output

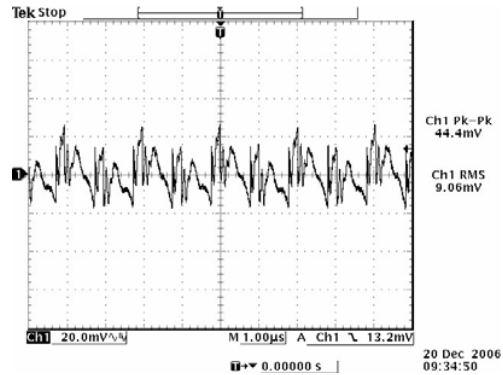


12 Vdc input, 1.2 Vdc/40 A output

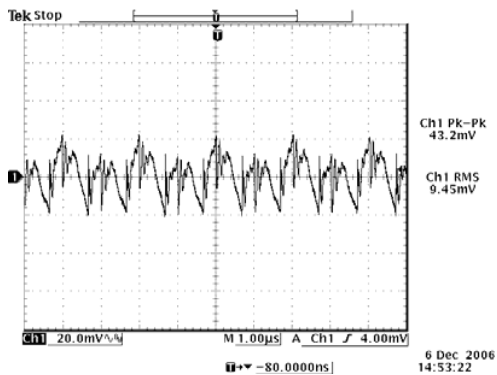


12 Vdc input, 1.8 Vdc/40 A output

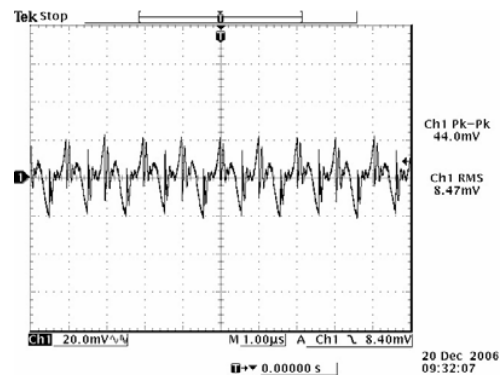

12 Vdc input, 2.5 Vdc/40 A output

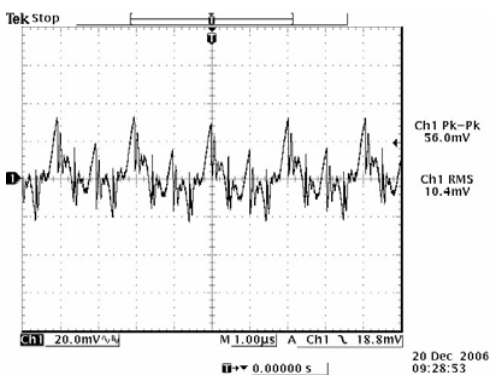

12 Vdc input, 3.3 Vdc/40 A output

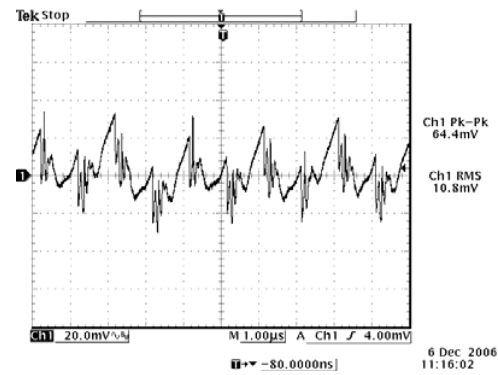

12 Vdc input, 5.0 Vdc/40 A output


**Note:** Ripple and noise at full load, 0-20 MHz BW, with a 10  $\mu$ F tantalum cap and a 1  $\mu$ F ceramic cap at the output, and  $T_a=25$  deg C.

# NON-ISOLATED DC/DC CONVERTERS


5 Vdc - 13.8 Vdc Input      0.6 Vdc - 5.0 Vdc/40 A Output




## Transient Response Waveforms

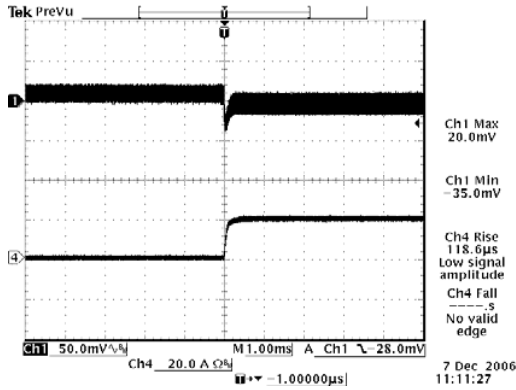


Vout= 0.6 V 0%-50% Load Transients

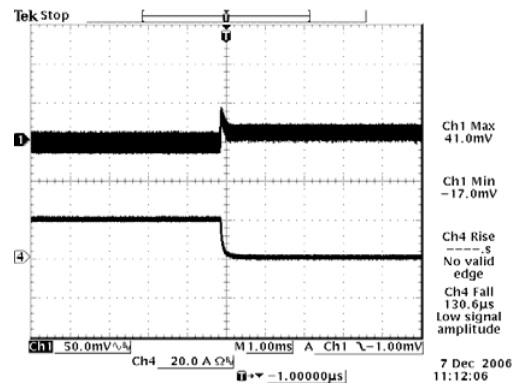


Vout=0.6 V 50%-0% Load Transients

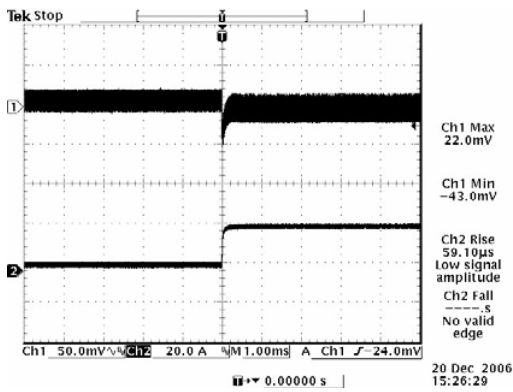


Vout=1.2 V 0%-50% Load Transients

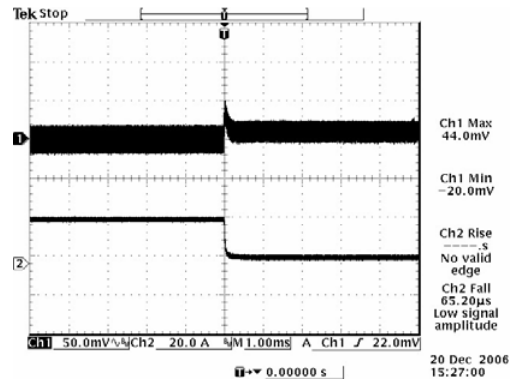

Vout=1.2 V 50%-0% Load Transients

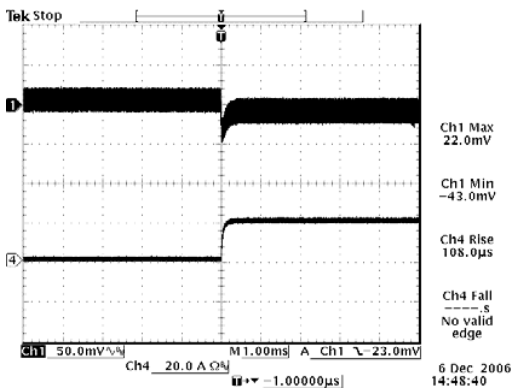

Vout=1.8 V 0%-50% Load Transients

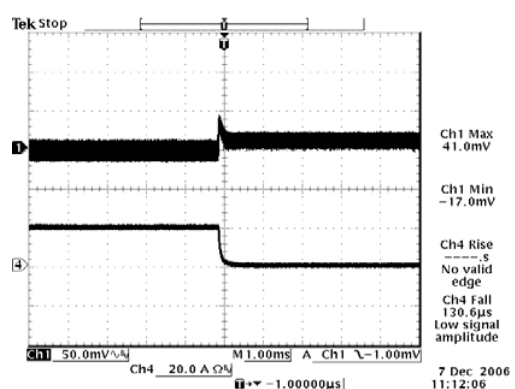


Vout=1.8 V 50%-0% Load Transients


**NON-ISOLATED DC/DC CONVERTERS**  
 5 Vdc - 13.8 Vdc Input      0.6 Vdc - 5.0 Vdc/40 A Output




**Transient Response Waveforms (continued)**

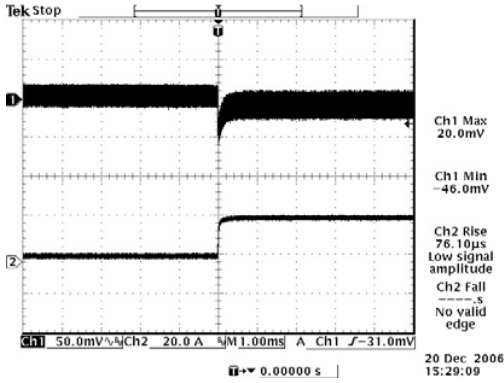


Vout= 2.5 V 0%-50% Load Transients

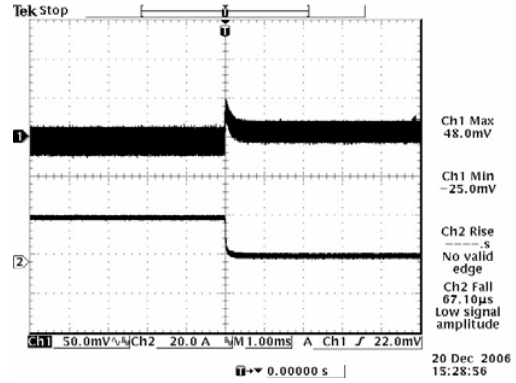


Vout=2.5 V 50%-0% Load Transients

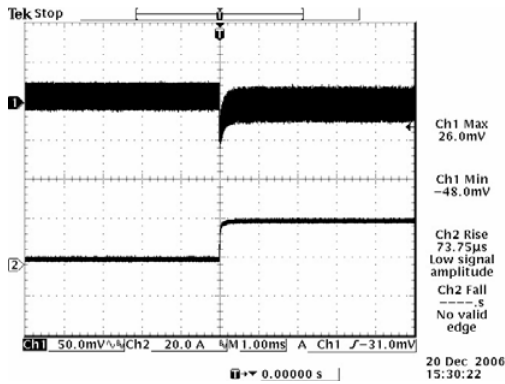


Vout=3.3 V 0%-50% Load Transients

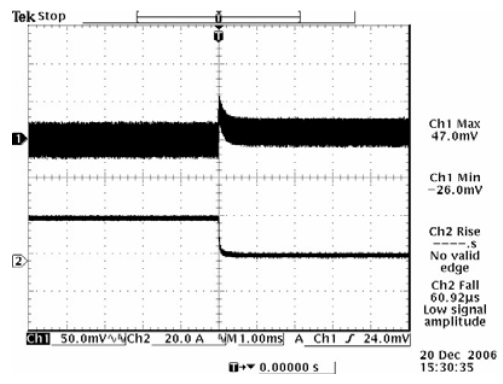

Vout=3.3 V 50%-0% Load Transients

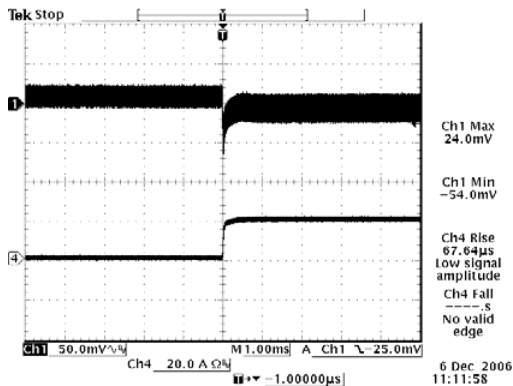

Vout=5 V 0%-50% Load Transients

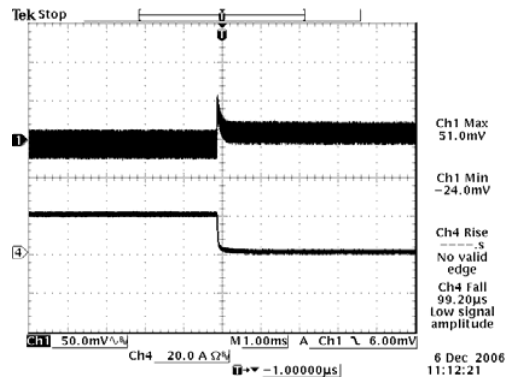

Vout=5 V 50%-0% Load Transients

**Note:** Transient response at di/dt = 10 A/uS, with external electrolytic cap 4700 uF, and Ta=25 deg C.





**NON-ISOLATED DC/DC CONVERTERS**  
 5 Vdc - 13.8 Vdc Input      0.6 Vdc - 5.0 Vdc/40 A Output




**Mechanical Outline**

**ORP2-40E1A0**

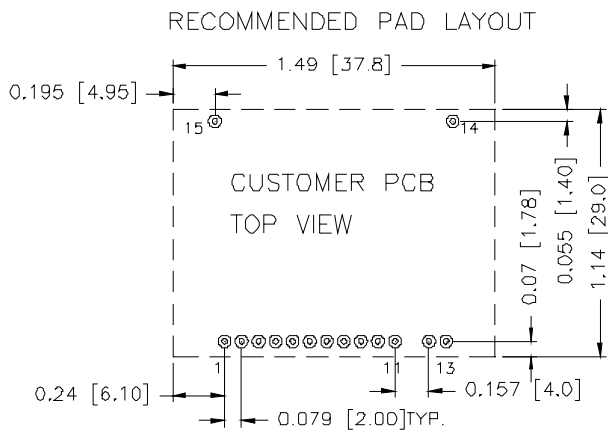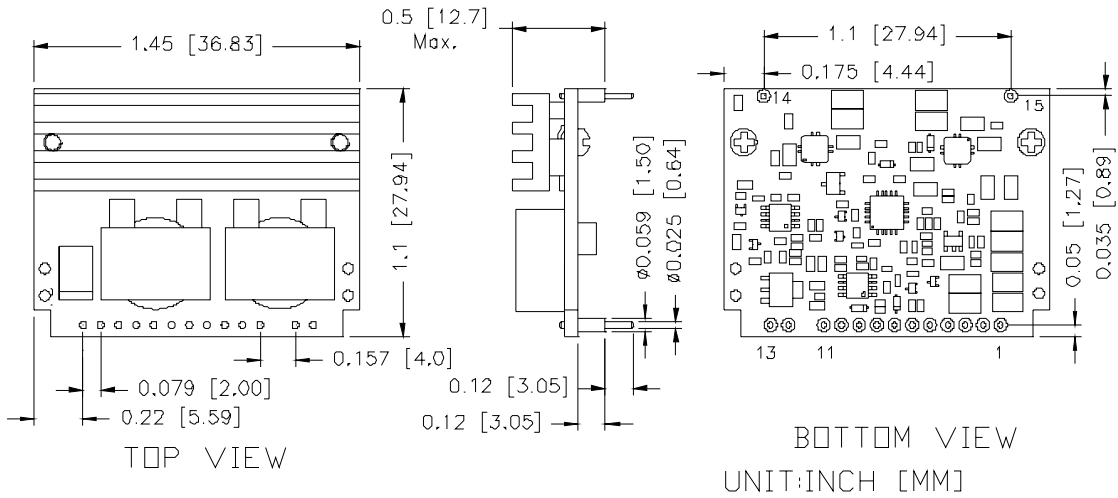

2 SUPPORT PAD THR. HOLES  $\varnothing 0.085$  [ $\varnothing 2.2$ ] BOTH SIDE  
 13 PIN PAD THR. HOLES:  $\varnothing 0.032$  [ $\varnothing 0.8$ ] BOTH SIDE

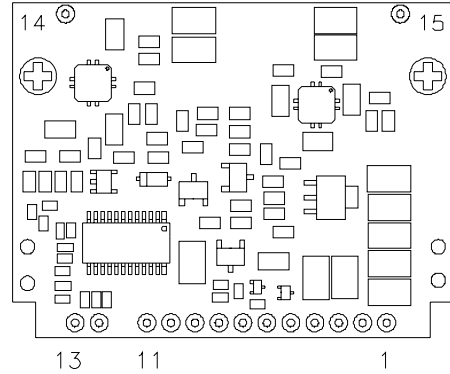

**Pin Connections**


Pin	Function	Pin	Function
1	Vout	9	PwGOOD
2	Vout	10	Sense-
3	Vout	11	Sense+
4	GND	12	Vin
5	GND	13	Vin
6	Enable	14	Mech.Support
7	Trim-	15	Mech.Support
8	Trim+		

**NON-ISOLATED DC/DC CONVERTERS**  
 5 Vdc - 13.8 Vdc Input      0.6 Vdc - 5.0 Vdc/40 A Output




**Mechanical Outline**

**VRP2-40E1A0**

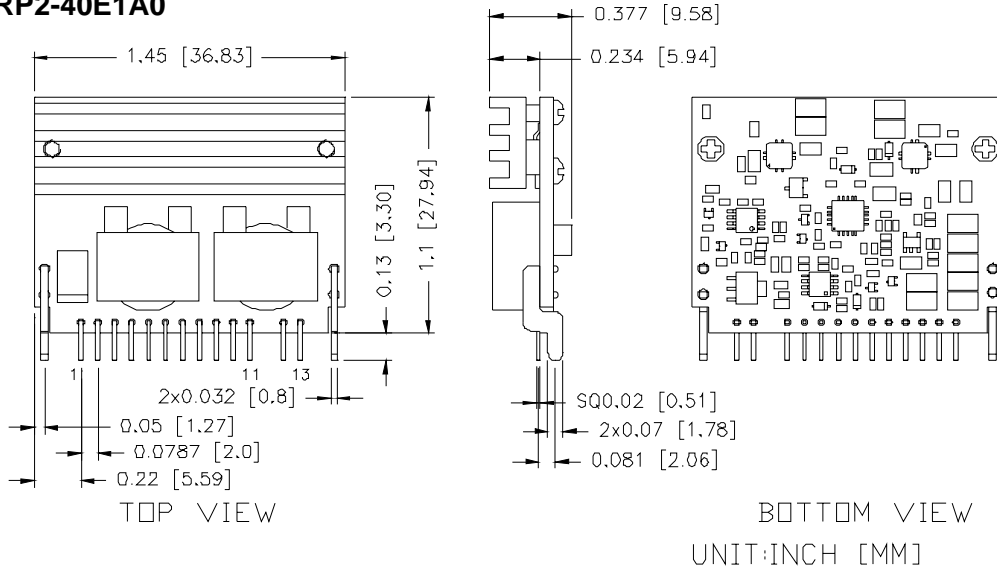

**RECOMMENDED PAD LAYOUT**

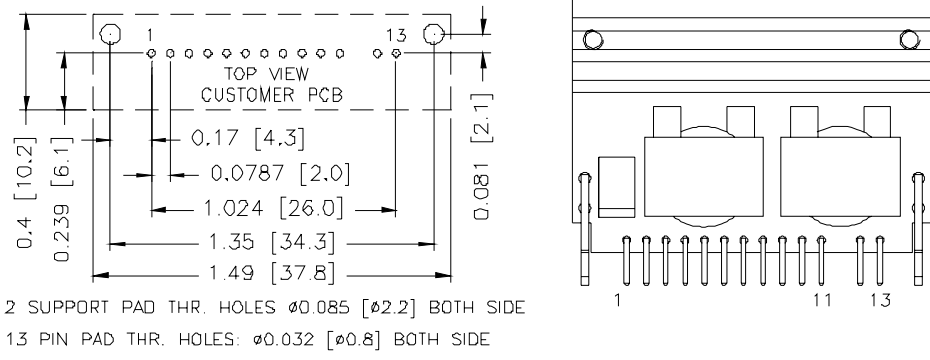

**Pin Connections**

Pin	Function
1	Vout
2	Vout
3	Vout
4	GND
5	GND
6	Enable
7	Trim-
8	Trim+
9	PwGOOD
10	Sense-
11	Sense+
12	Vin
13	Vin

**RoHS Compliance**

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 080307

**CORPORATE**

**Bel Fuse Inc.**  
 206 Van Vorst Street  
 Jersey City, NJ 07302  
 Tel 201-432-0463  
 Fax 201-432-9542  
[www.belfuse.com](http://www.belfuse.com)

**FAR EAST**

**Bel Fuse Ltd.**  
 8F/ 8 Luk Hop Street  
 San Po Kong  
 Kowloon, Hong Kong  
 Tel 852-2328-5515  
 Fax 852-2352-3706  
[www.belfuse.com](http://www.belfuse.com)

**EUROPE**

**Bel Fuse Europe Ltd.**  
 Preston Technology Management Centre  
 Marsh Lane, Suite G7, Preston  
 Lancashire, PR1 8UD, U.K.  
 Tel 44-1772-556601  
 Fax 44-1772-888366  
[www.belfuse.com](http://www.belfuse.com)