


Operating Voltage = 125/250 Vac
 Operating Current = 1.0 Ampere
 Frequency of Operation = 60—400 Hz
 Temperature Range (Storage) = -40 to 105 C
 Temperature Range (Operating) = -40 to 65 C
 Leakage current (Max) @ 125 V~, 60 Hz = 0.85 ma
 Dielectric Withstand (L-Grd), (1 Minute) = 1500 Vac
 Dielectric Withstand (L-L), (1 Minute) = 1500 Vdc



Order P/N: **ZG-1435-1B** for MIL-STD-461C
ZG-1435-1BD for MIL-STD-461D or E

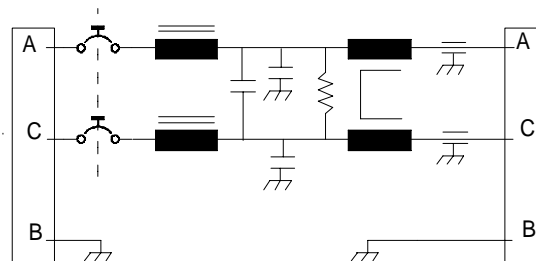

The ZG-1435-1B filter has been designed for systems operating under the requirements of MIL-STD-461C. If MIL-STD-461D or E are specified then part number ZG-1435-1BD should be specified. The difference is that the differential capacitor is repositioned on the line side in order to match the test configuration of 461D and E.

The filter case is environmentally sealed and is designed to handle the shock and vibration of wheeled vehicle installations.

The circuit uses feed through capacitors the insertion loss is 60 db to 1.0 Ghz and beyond.

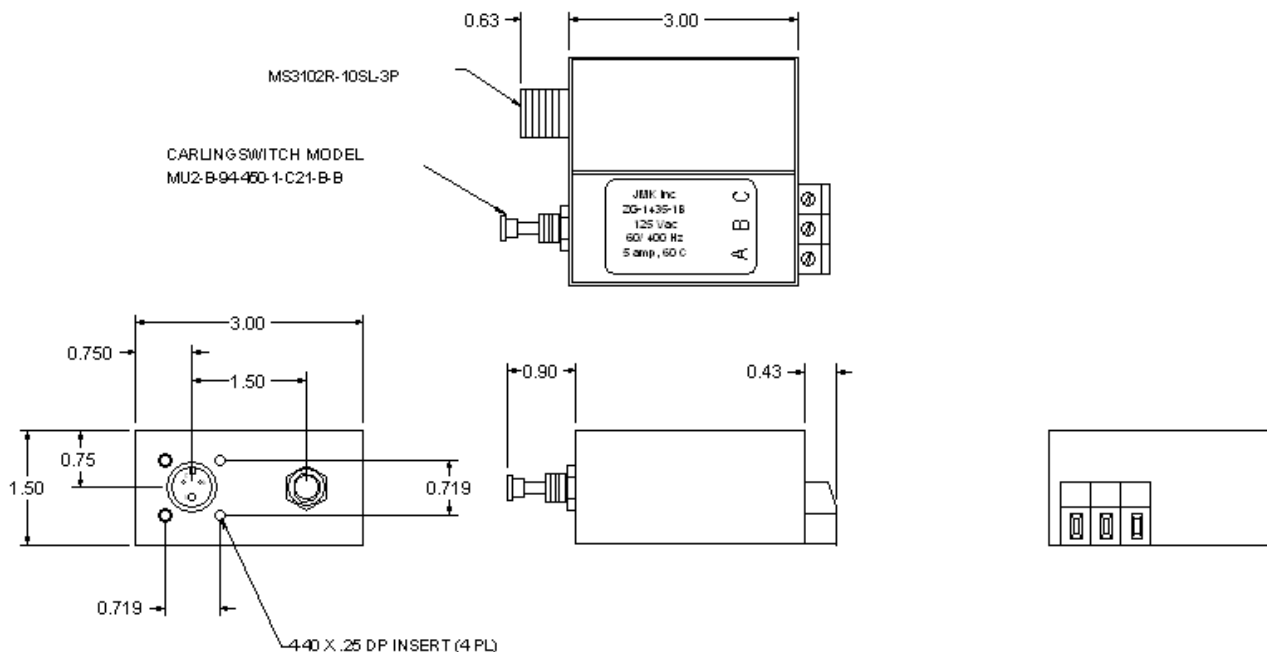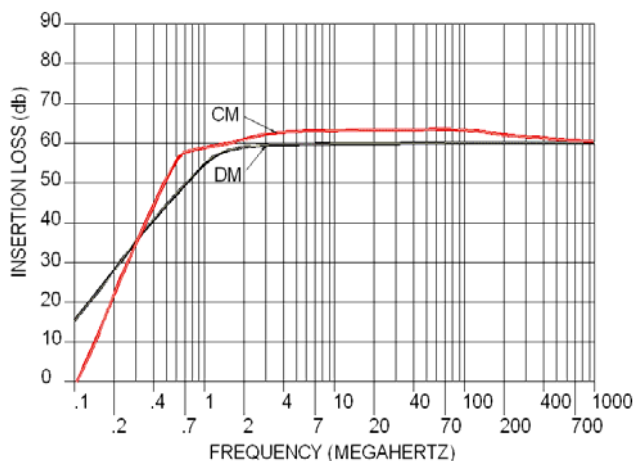

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44- 07785310729 FX: 44-(0) 141 589 1884