



Parameters	Ratings	Units
Load Voltage	400	V <sub>p</sub>
Load Current	150	mA
Max R <sub>ON</sub>	25	Ω

## Features

- Small 8-Pin DIP Package
- Low Drive Power Requirements (TTL/CMOS Compatible)
- 100% Solid State
- Arc-Free With No Snubbing Circuits
- 3750V<sub>rms</sub> Input/Output Isolation
- No EMI/RFI Generation
- Machine Insertable, Wave Solderable
- Current Limiting
- Surface Mount and Tape Reel Version Available.

## Applications

- Telecommunications
  - Telecom Switching
  - Tip/Ring Circuits
  - Modem Switching (Laptop, Notebook, Pocket Size)
  - Hook Switch
  - Dial Pulsing
  - Ground Start
  - Ringing Injection
- Instrumentation
  - Multiplexers
  - Data Acquisition
  - Electronic Switching
  - I/O Subsystems
  - Meters (Watt-Hour, Water, Gas)
- Medical Equipment-Patient/Equipment Isolation
- Security
- Aerospace
- Industrial Controls

## Description

PAA110L is a 400V, 150mA, 25Ω dual 1-Form-A (normally open) relay. This performance leader provides high peak load voltage handling capability and improved peak load current handling. Integrated current-limiting circuitry limits current to 280mA at room temperature.


## Approvals

- UL Recognized Component: File # E76270
- CSA Certified Component: File # 1175739
- EN/IEC 60950-1 Compliant


## Ordering Information

Part #	Description
PAA110L	8-Pin DIP (50/Tube)
PAA110PL	8-Pin Flatpack (50/Tube)
PAA110PLTR	8-Pin Flatpack (1000/Reel)
PAA110LS	8-Pin Surface Mount (50/Tube)
PAA110LSTR	8-Pin Surface Mount (1000/Reel)

## Pin Configuration

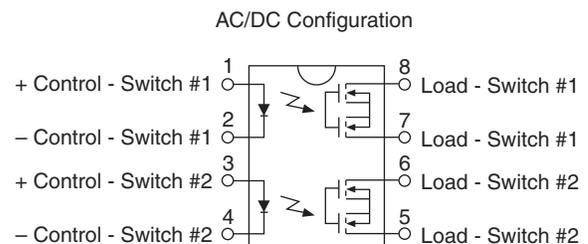

Switching Characteristics of Normally Open (Form A) Devices

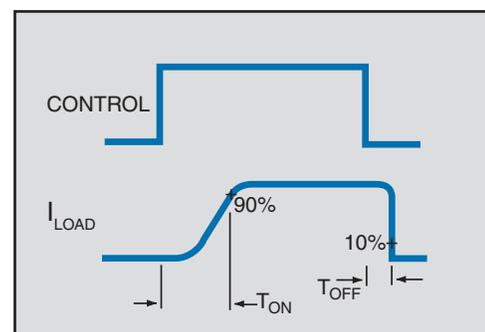

## Absolute Maximum Ratings

Parameter	Ratings	Units
Blocking Voltage	400	$V_P$
Reverse Input Voltage	5	V
Input Control Current	50	mA
Peak (10ms)	1	A
Input Power Dissipation <sup>1</sup>	150	mW
Total Power Dissipation <sup>2</sup>	800	mW
Isolation Voltage Input to Output	3750	$V_{rms}$
Operational Temperature	-40 to +85	°C
Storage Temperature	-40 to +125	°C

<sup>1</sup> Derate Linearly 1.33 mW/°C

<sup>2</sup> Derate Linearly 6.67 mW/°C

Electrical absolute maximum ratings are at 25°C













*Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.*

## Electrical Characteristics

Parameter	Conditions	Symbol	Min	Typ	Max	Units
<b>Output Characteristics @ 25°C</b>						
Load Current, Continuous	-	$I_L$	-	-	150	mA
On-Resistance	$I_L=150mA$	$R_{ON}$	-	18	25	$\Omega$
Off-State Leakage Current	$V_L=400V$	$I_{LEAK}$	-	-	1	$\mu A$
Switching Speeds						
Turn-On	$I_F=5mA, V_L=10V$	$t_{ON}$	-	0.3	1	ms
Turn-Off		$t_{OFF}$	-	0.058	0.5	
Output Capacitance	50V; f=1MHz	$C_{OUT}$	-	25	-	pF
Load Current Limiting	-	$I_{CL}$	190	235	280	mA
Capacitance Input to Output	-	-	-	3	-	pF
<b>Input Characteristics @ 25°C</b>						
Input Control Current	$I_L=150mA$	$I_F$	-	-	5	mA
Input Dropout Current	-	$I_F$	0.4	-	-	mA
Input Voltage Drop	$I_F=5mA$	$V_F$	0.9	1.2	1.4	V
Reverse Input Current	$V_R=5V$	$I_R$	-	-	10	$\mu A$
<b>Common Characteristics @ 25°C</b>						
Input to Output Capacitance	-	$C_{IO}$	-	3	-	pF









\*NOTE: If both poles operate simultaneously load current must be derated so as not to exceed the package power dissipation value.

**PERFORMANCE DATA\***

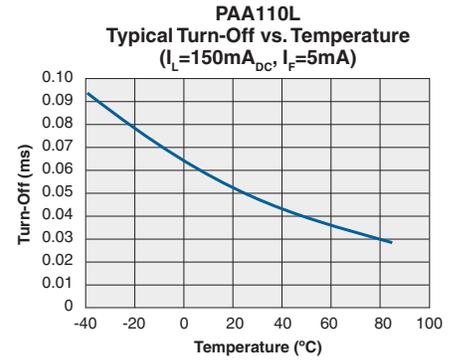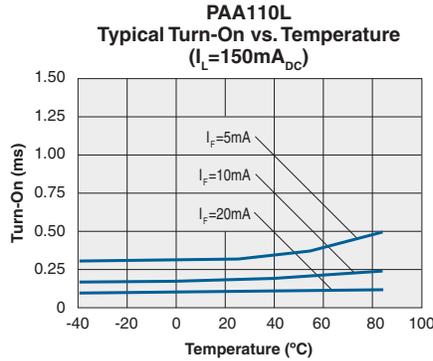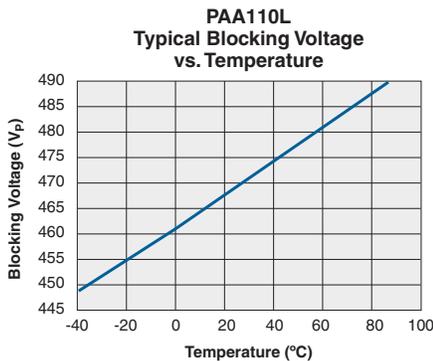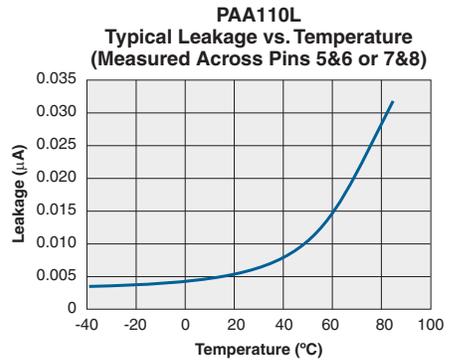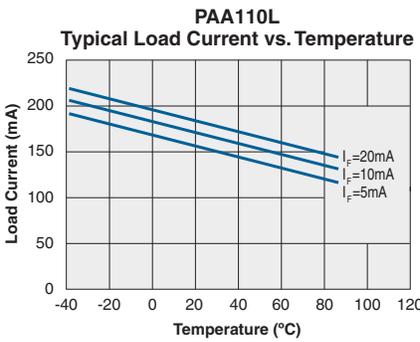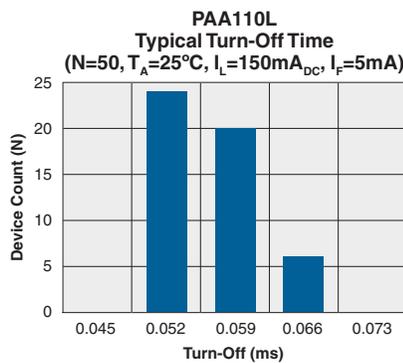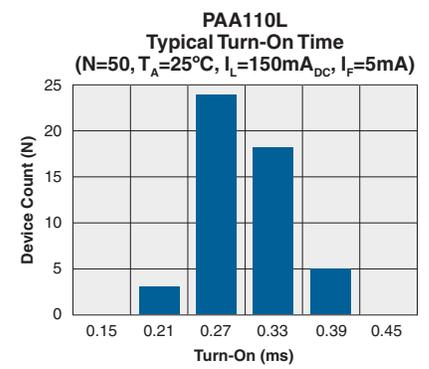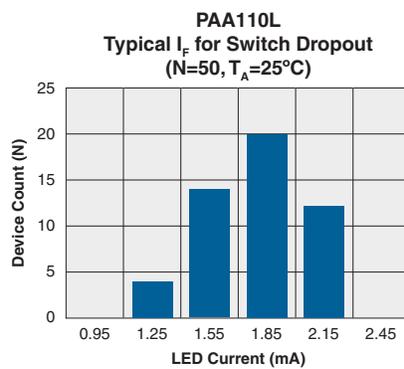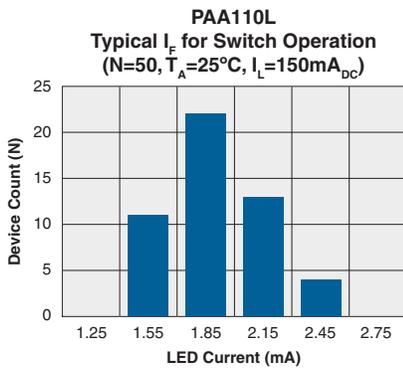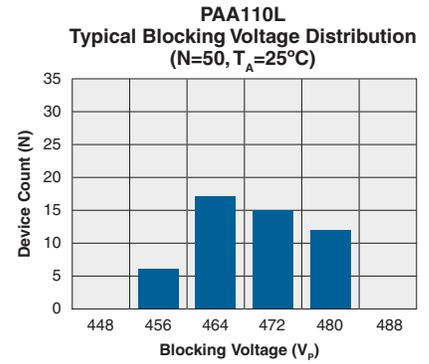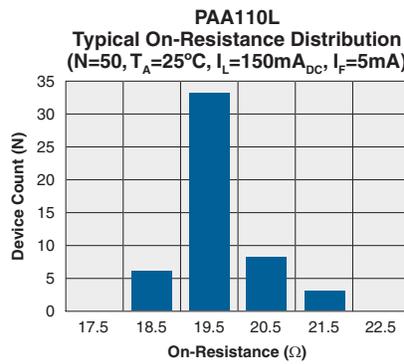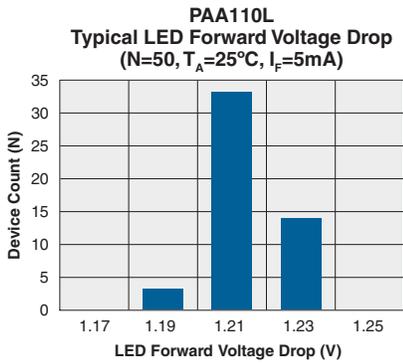

\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

PERFORMANCE DATA\*

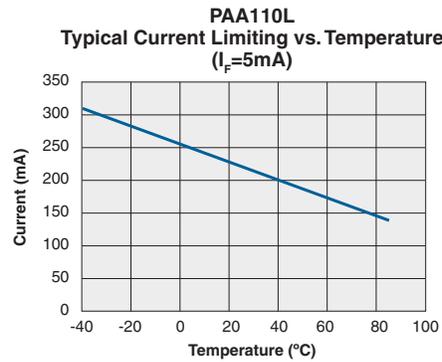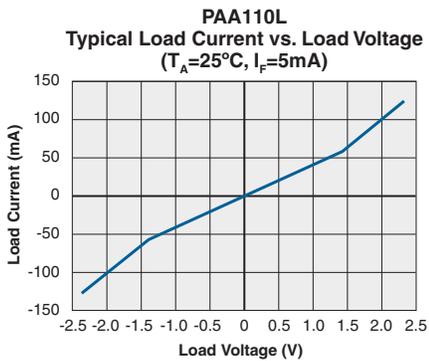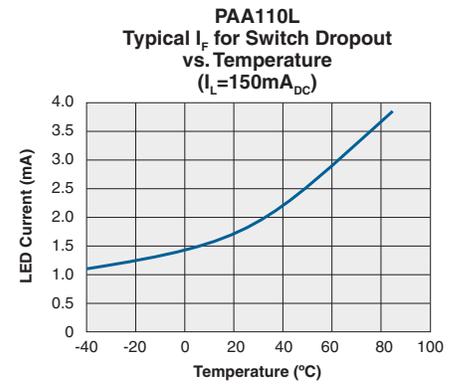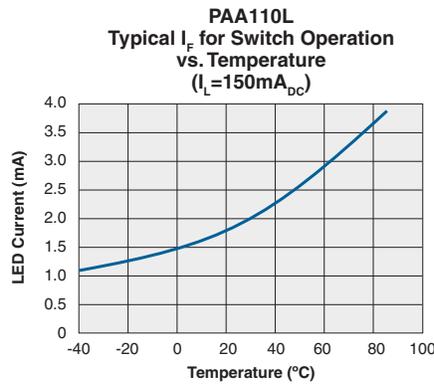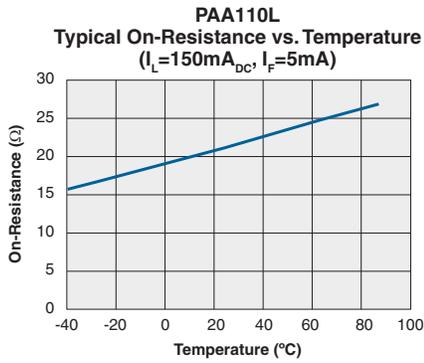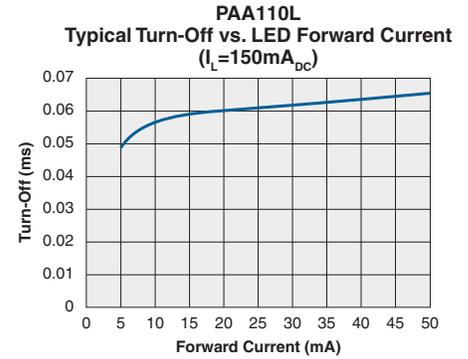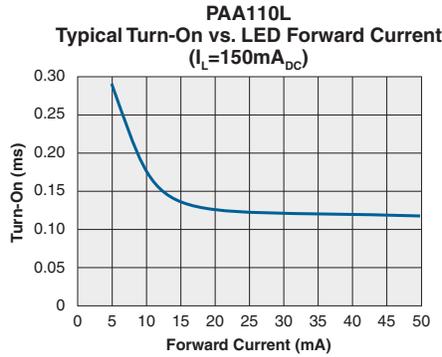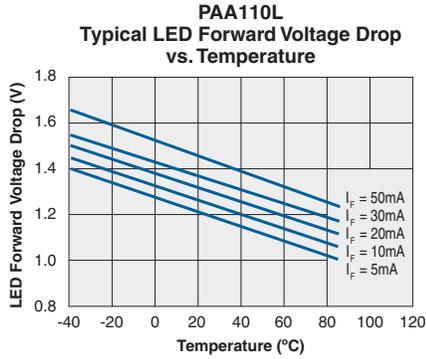

\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

## Manufacturing Information

### Soldering

For proper assembly, the component must be processed in accordance with the current revision of IPC/JEDEC standard J-STD-020. Failure to follow the recommended guidelines may cause permanent damage to the device resulting in impaired performance and/or a reduced lifetime expectancy.


### Washing

Clare does not recommend ultrasonic cleaning or the use of chlorinated solvents.




## MECHANICAL DIMENSIONS

### Tape and Reel Packaging for 8 Pin Flatpack Package

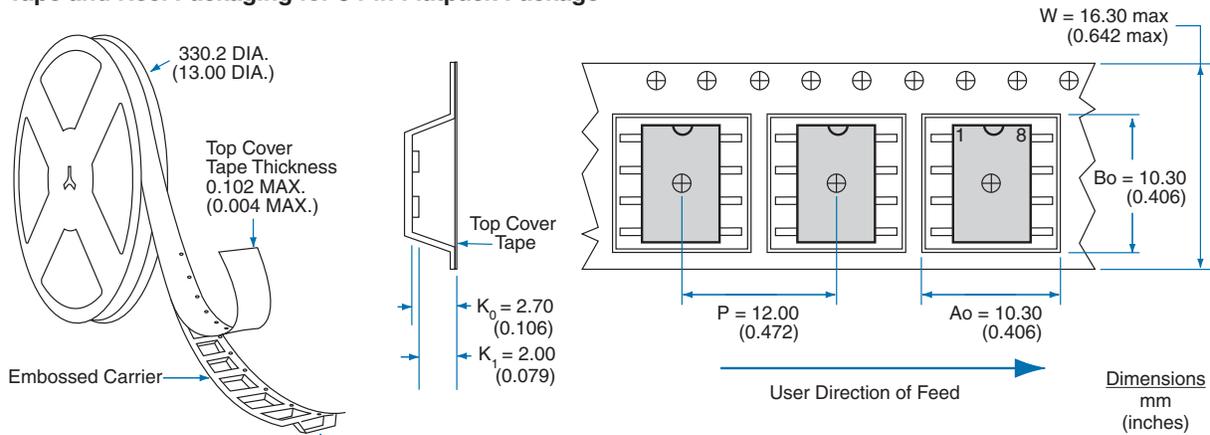


NOTE: Tape dimensions not shown comply with JEDEC Standard EIA-481-2

### Tape and Reel Packaging for 8-Pin Surface Mount Package

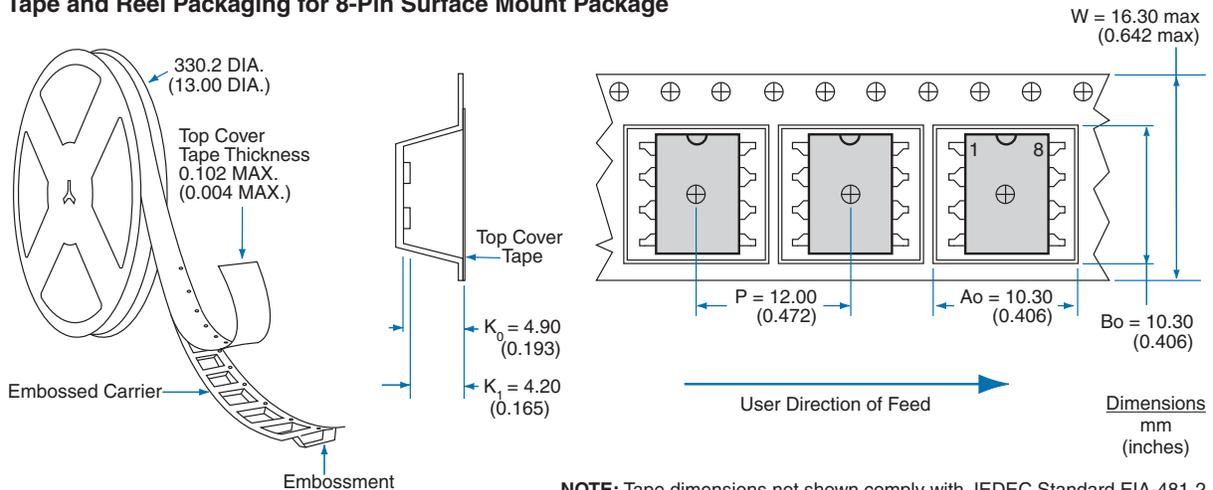


NOTE: Tape dimensions not shown comply with JEDEC Standard EIA-481-2

**8-Pin DIP Through-Hole Package**

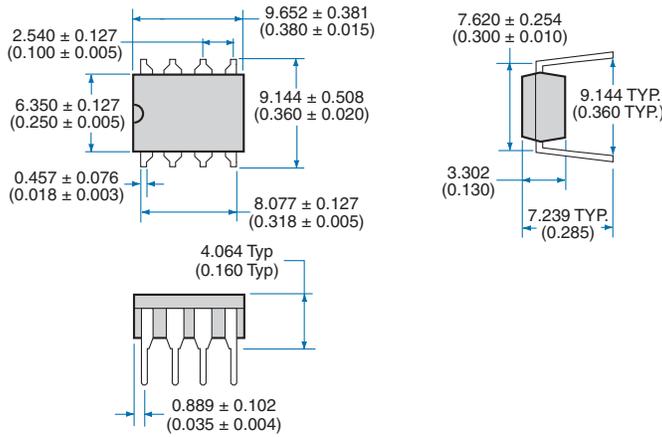


**PC Board Pattern**

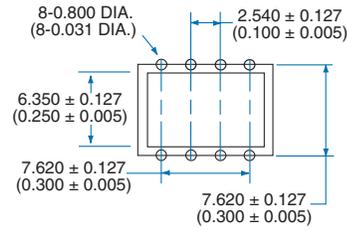


Dimensions  
mm  
(inches)

**8-Pin Surface Mount Package**

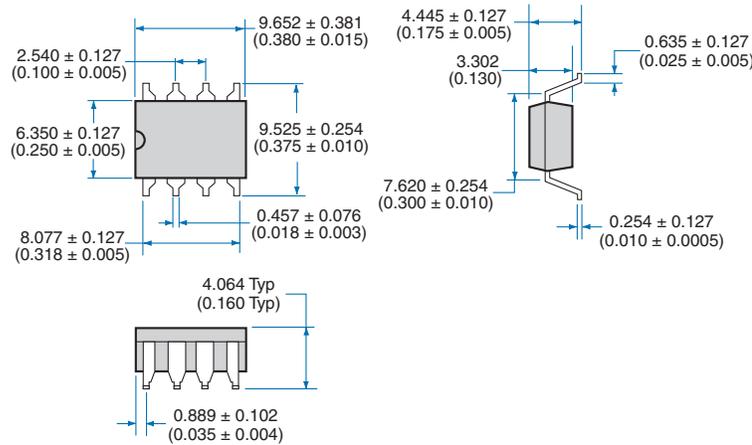


**Recommended PCB Land Pattern**




Dimensions  
mm  
(inches)

**8 Pin Flatpack Package**

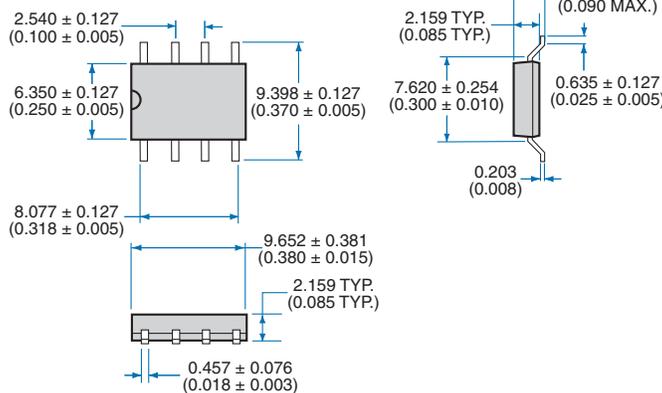

**Recommended PCB Land Pattern**



Dimensions  
mm  
(inches)

**For additional information please visit our website at: [www.clare.com](http://www.clare.com)**

Clare, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in Clare's Standard Terms and Conditions of Sale, Clare, Inc. assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of Clare's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. Clare, Inc. reserves the right to discontinue or make changes to its products at any time without notice.

Specification: DS-PAA110L-R05  
© Copyright 2008, Clare, Inc.  
OptoMOS® is a registered trademark of Clare, Inc.  
All rights reserved. Printed in USA.  
7/23/08