



Parameter	Rating	Units
AC Operating Voltage	20 - 240	V_{rms}
Load Current	2	A_{rms}
On-State Voltage Drop	1.15	V_{rms} (at $I_L = 2A_{rms}$)
Blocking Voltage	600	V_P

Features

- Load Current up to $2A_{rms}$
- $600V_P$ Blocking Voltage
- 5mA Sensitivity
- Zero-Crossing Detection
- DC Control, AC Output
- Optically Isolated
- TTL and CMOS Compatible
- Low EMI and RFI Generation
- High Noise Immunity
- Machine Insertable, Wave Solderable

Applications

- Programmable Control
- Process Control
- Power Control Panels
- Remote Switching
- Gas Pump Electronics
- Contactors
- Large Relays
- Solenoids
- Motors
- Heaters

Description

CPC1976 is an AC Solid State Switch utilizing dual power SCR thyristor outputs. This device also includes zero-cross turn-on circuitry and is specified with a blocking voltage of $600V_P$.

In addition, tightly controlled zero-cross circuitry ensures low noise switching of AC loads by minimizing the generation of transients. The optically coupled input and output circuits provide $3750V_{rms}$ of isolation and noise immunity between the control and load circuits. As a result, the CPC1976 is well suited for industrial environments where electromagnetic interference would disrupt the operation of plant facility communication and control systems.


Approvals

- UL 508 Recognized Component: File #: E69938
- CSA Certified Component: Certificate #: 1172007

Ordering Information

Part #	Description
CPC1976Y	4-Pin SIP (25/Tube)

Pin Configuration



Absolute Maximum Ratings (@ 25° C)

Parameter	Ratings	Units
Blocking Voltage (V_{DRM})	600	V_P
Reverse Input Voltage	5	V
Input Control Current	50	mA
Peak (10ms)	1	A
Input Power Dissipation ¹	150	mW
Total Power Dissipation ²	2400	mW
Isolation voltage Input to Output	3750	V_{rms}
Operational Temperature	-40 to +85	°C
Storage Temperature	-40 to +125	°C

¹ Derate Linearly 1.33 mW / °C

² Derate Linearly 20 mW / °C

Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.

Electrical Characteristics

Parameters	Conditions	Symbol	Min	Typ	Max	Units
Output Characteristics @ 25°C						
Load Current, Continuous	$V_L=120-240V_{rms}$	I_L	0.005	-	2	A_{rms}
Maximum Surge Current	$t \leq 16ms$	I_{PK}	-	-	20	A
Off State Leakage Current	V_{DRM}	I_{LEAK}	-	-	1	mA
On-State Voltage Drop ¹	$I_L=2A_{rms}$	-	-	0.86	1.15	V_{rms}
Critical Rate of Rise	-	dv/dt	1000	1200	-	V/ μs
Switching Speeds	$I_F = 5 mA$					
Turn-on						
Turn-off		t_{OFF}	-	-	0.5	cycles
Zero-Cross Turn-On Voltage	1st half cycle	-	-	2	10	V
	Subsequent half cycle	-	-	-	2	V
Holding Current	-	I_H	-	0.82	5	mA
Latching Current	-	I_L	-	0.84	6	mA
Operating Frequency ²	-		20	-	500	Hz
Load Power Factor for Guaranteed Turn-On ³	60Hz	PF	0.25	-	-	-
Input Characteristics @ 25°C						
Input Control Current ⁴	60Hz	I_F	-	-	5	mA
Input Drop-out Voltage	-	-	0.8	-	-	V
Input Voltage Drop	$I_F=5mA$	V_F	0.9	1.2	1.4	V
Reverse Input Current	$V_R=5V$	I_R	-	-	10	μA
Common Characteristics @ 25°C						
Input to Output Capacitance	-	$C_{I/O}$	-	-	3	pF

¹ Tested at a peak value equivalent.


² Zero Cross 1st half cycle @ <100Hz.

³ Snubber circuits may be required at low power factors.


⁴ For high-noise environments, or for high-frequency operation, use $I_F \geq 10mA$.

PERFORMANCE DATA*


Typical LED Forward Voltage Drop Distribution
(N=50, $T_A=25^\circ\text{C}$, $I_F=5\text{mA}$)

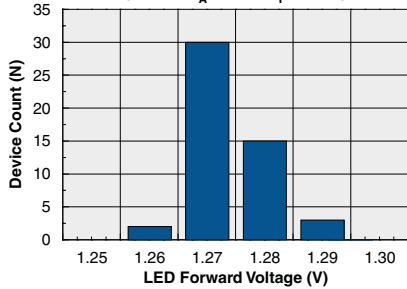


Typical On-State Voltage Drop Distribution
(N=50, $T_A=25^\circ\text{C}$, $I_L=2A_{DC}$, $I_F=5\text{mA}$)

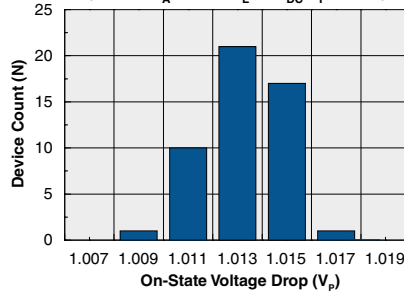


LED Current to Operate Distribution
(N=50, $T_A=25^\circ\text{C}$, $V_L=120V_{AC}$, 60Hz)

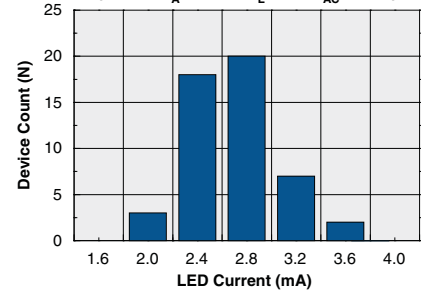


Typical Blocking Voltage Distribution
(N=50, $T_A=25^\circ\text{C}$)

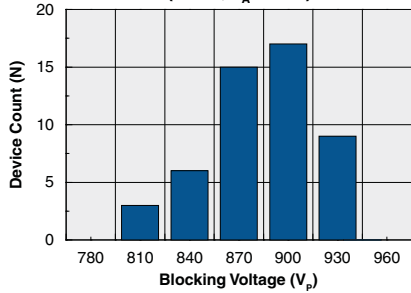


Blocking Voltage vs. Temperature

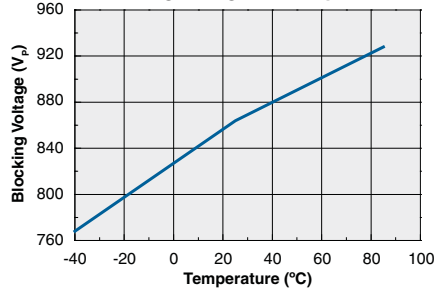


Leakage Current
($V_L=600V_p$)

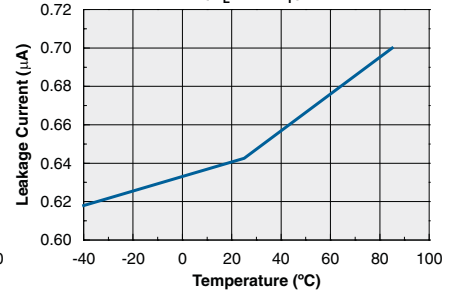


Holding Current

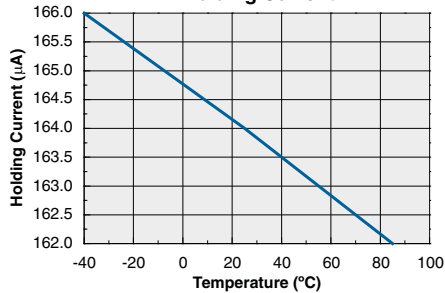

LED Current to Operate
($V_L=5V$ / 60Hz)






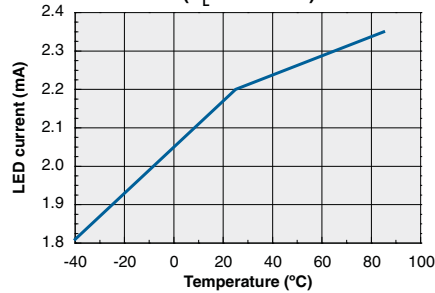


Load Voltage vs. Temperature
($I_F=5\text{mA}$)

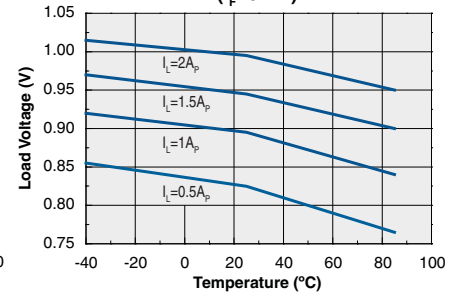

* The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

PERFORMANCE DATA*

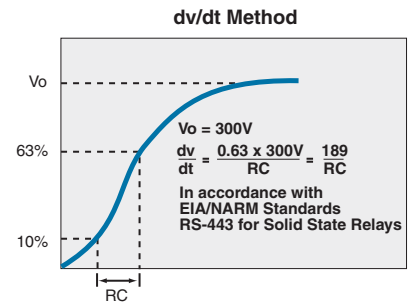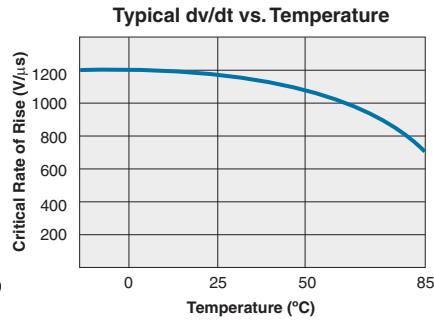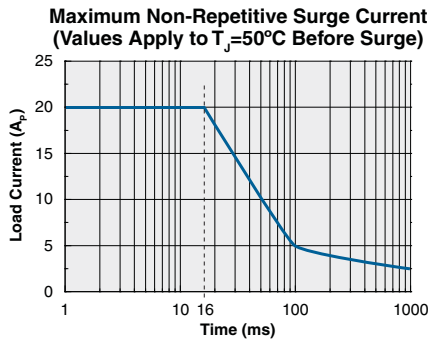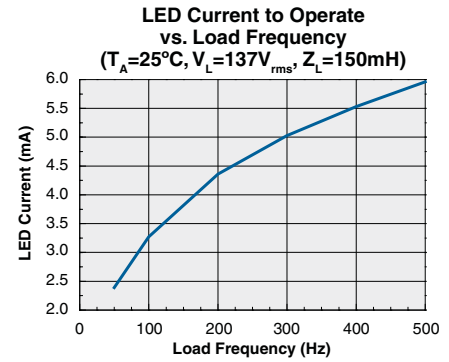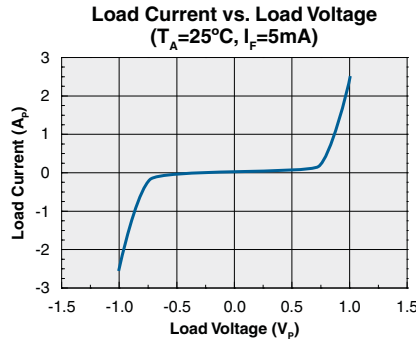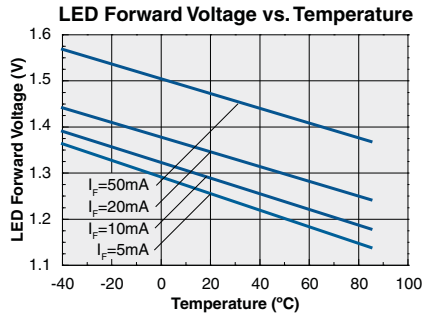

* The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

MANUFACTURING INFORMATION

Soldering


For proper assembly, the component must be processed in accordance with the current revision of IPC/JEDEC standard J-STD-020. Failure to follow the recommended guidelines may cause permanent damage to the device resulting in impaired performance and/or a reduced lifetime expectancy.

Washing

Clare does not recommend ultrasonic cleaning or the use of chlorinated solvents.



MECHANICAL DIMENSIONS

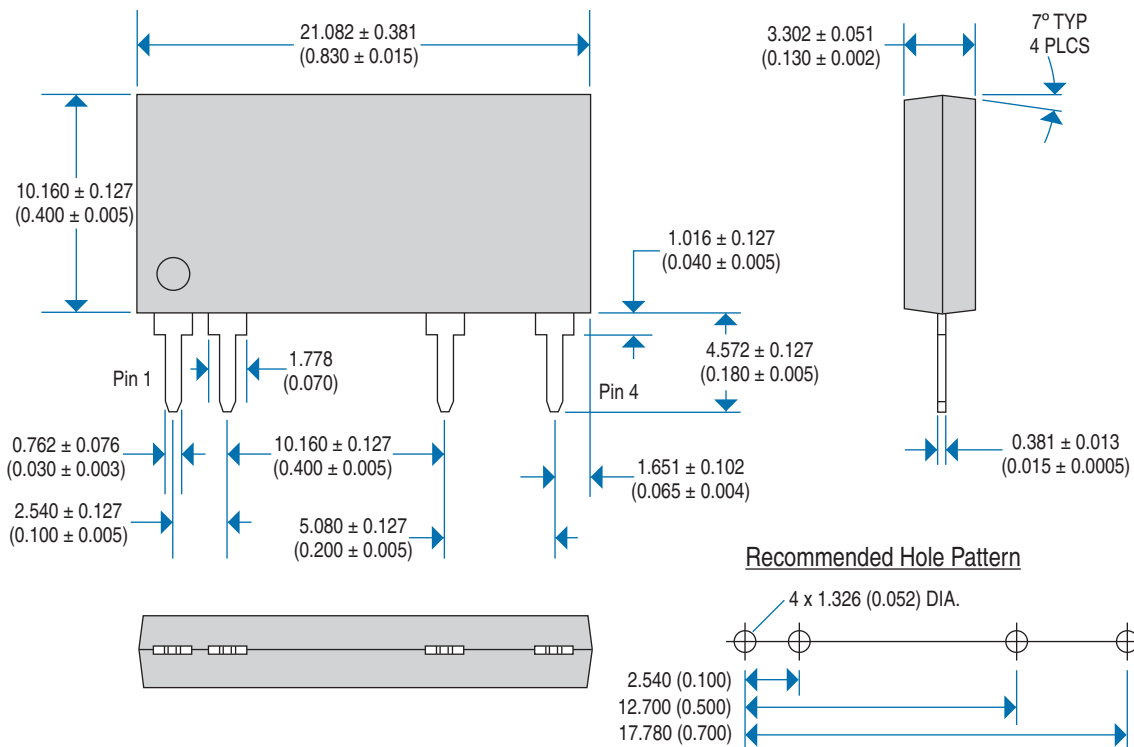

Dimensions
mm
(inches)

Note: Recommended hole size is based on the maximum cross-section diagonal measure of the pin plus 0.4mm (0.016).

For additional information please visit our website at: www.clare.com

Clare, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in Clare's Standard Terms and Conditions of Sale, Clare, Inc. assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of Clare's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. Clare, Inc. reserves the right to discontinue or make changes to its products at any time without notice.

Specification: DS-CPC1976-R02
©Copyright 2009, Clare, Inc.
All rights reserved. Printed in USA.
3/9/09