

# ATF-501P8

## High Linearity Enhancement Mode<sup>[1]</sup>

## Pseudomorphic HEMT in 2x2 mm<sup>2</sup> LPCC<sup>[3]</sup> Package



### Data Sheet

#### Description

Avago Technologies's ATF-501P8 is a single-voltage high linearity, low noise E-pHEMT housed in an 8-lead JEDEC-standard leadless plastic chip carrier (LPCC<sup>[3]</sup>) package. The device is ideal as a medium-power amplifier. Its operating frequency range is from 400 MHz to 3.9 GHz.

The thermally efficient package measures only 2mm x 2mm x 0.75mm. Its backside metalization provides excellent thermal dissipation as well as visual evidence of solder reflow. The device has a Point MTTF of over 300 years at a mounting temperature of +85°C. All devices are 100% RF & DC tested.

#### Notes:

1. Enhancement mode technology employs a single positive  $V_{gs}$ , eliminating the need of negative gate voltage associated with conventional depletion mode devices.
2. Refer to reliability datasheet for detailed MTTF data.
3. Conforms to JEDEC reference outline M0229 for DRP-N.
4. Linearity Figure of Merit (LFOM) is essentially OIP3 divided by DC bias power.



#### Features

- Single voltage operation
- High Linearity and P1dB
- Low Noise Figure
- Excellent uniformity in product specifications
- Small package size: 2.0 x 2.0 x 0.75 mm<sup>3</sup>
- Point MTTF > 300 years<sup>[2]</sup>
- MSL-1 and lead-free
- Tape-and-Reel packaging option available

#### Specifications

- 2 GHz; 4.5V, 280 mA (Typ.)
- 45.5 dBm Output IP3
- 29 dBm Output Power at 1dB gain compression
- 1 dB Noise Figure
- 15 dB Gain
- 14.5 dB LFOM<sup>[4]</sup>
- 65% PAE
- 23°C/W thermal resistance

#### Pin Connections and Package Marking

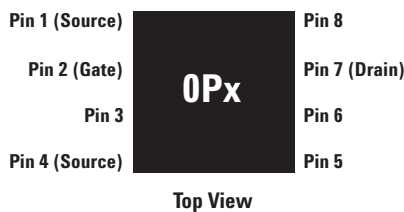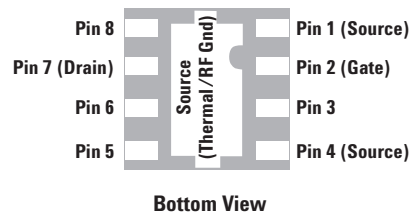

#### Note:

Package marking provides orientation and identification:

"OP" = Device Code

"x" = Date code indicates the month of manufacture.

#### Applications

- Front-end LNA Q2 and Q3, Driver or Pre-driver Amplifier for Cellular/PCS and WCDMA wireless infrastructure
- Driver Amplifier for WLAN, WLL/RLL and MMDS applications
- General purpose discrete E-pHEMT for other high linearity applications



**Attention:**  
Observe precautions for handling electrostatic sensitive devices.

ESD Machine Model (Class A)

ESD Human Body Model (Class 1C)

Refer to Agilent Application Note A004R:  
Electrostatic Discharge Damage and Control.

# ATF-501P8 Absolute Maximum Ratings<sup>[1]</sup>

| Symbol               | Parameter                              | Units | Absolute Maximum |
|----------------------|--|-------|------------------|
| V <sub>DS</sub>      | Drain-Source Voltage <sup>[2]</sup>    | V     | 7                |
| V <sub>GS</sub>      | Gate-Source Voltage <sup>[2]</sup>     | V     | -5 to 0.8        |
| V <sub>GD</sub>      | Gate Drain Voltage <sup>[2]</sup>      | V     | -5 to 1          |
| I <sub>DS</sub>      | Drain Current <sup>[2]</sup>           | A     | 1                |
| I <sub>GS</sub>      | Gate Current                           | mA    | 12               |
| P <sub>diss</sub>    | Total Power Dissipation <sup>[3]</sup> | W     | 3.5              |
| P <sub>in max.</sub> | RF Input Power                         | dBm   | 30               |
| T <sub>CH</sub>      | Channel Temperature                    | °C    | 150              |
| T <sub>STG</sub>     | Storage Temperature                    | °C    | -65 to 150       |
| θ <sub>ch_b</sub>    | Thermal Resistance <sup>[4]</sup>      | °C/W  | 23               |

**Notes:**

1. Operation of this device in excess of any one of these parameters may cause permanent damage.
2. Assumes DC quiescent conditions.
3. Board (package belly) temperature T<sub>B</sub> is 25°C. Derate 43.5 mW/°C for T<sub>B</sub> > 69.5°C.
4. Channel-to-board thermal resistance measured using 150°C Liquid Crystal Measurement method.

## Product Consistency Distribution Charts at 2 GHz, 4.5V, 200 mA<sup>[5,6]</sup>

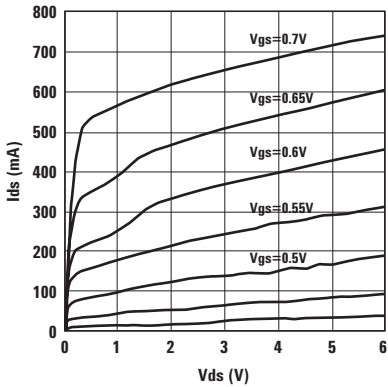


Figure 1. Typical IV curve (Vgs = 0.01V) per step.

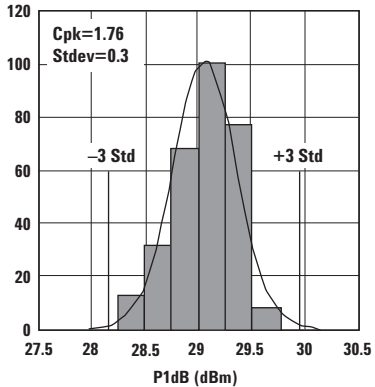


Figure 2. P1dB.

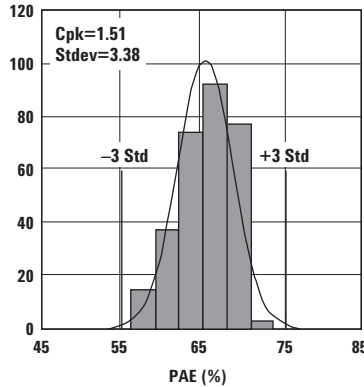


Figure 3. PAE.

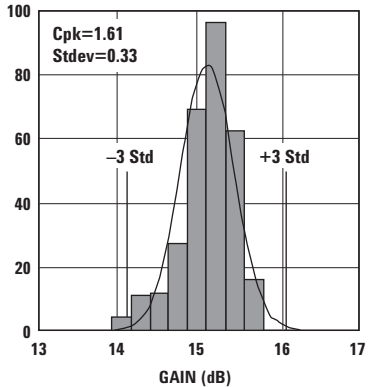


Figure 4. Gain.

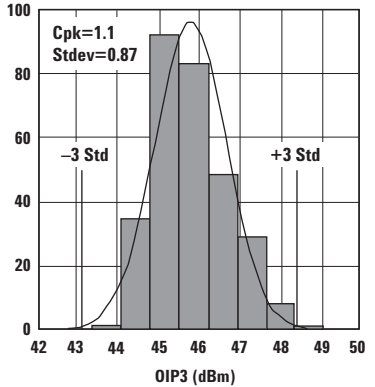


Figure 5. OIP3.

**Notes:**

5. Distribution data sample size is 300 samples taken from 3 different wafers and 3 different lots. Future wafers allocated to this product may have nominal values anywhere between the upper and lower limits.
6. Measurements are made on production test board, which represents a trade-off between optimal OIP3, P1dB and VSWR. Circuit losses have been de-embedded from actual measurements.

## ATF-501P8 Electrical Specifications

$T_A = 25^\circ\text{C}$ , DC bias for RF parameters is  $V_{ds} = 4.5\text{V}$  and  $I_{ds} = 280\text{ mA}$  unless otherwise specified.

| Symbol    | Parameter and Test Condition                                  | Units  | Min.          | Typ.      | Max.         |           |
|-----------|---|--|---------------|-----------|--------------|-----------|
| $V_{gs}$  | Operational Gate Voltage                                      | $V_{ds} = 4.5\text{V}, I_{ds} = 280\text{ mA}$   | V             | 0.42      | 0.55         | 0.67      |
| $V_{th}$  | Threshold Voltage   | $V_{ds} = 4.5\text{V}, I_{ds} = 32\text{ mA}$  | V             | —         | 0.33         | —         |
| $I_{dss}$ | Saturated Drain Current                                       | $V_{ds} = 4.5\text{V}, V_{gs} = 0\text{V}$   | $\mu\text{A}$ | —         | 5            | —         |
| $G_m$     | Transconductance  | $V_{ds} = 4.5\text{V}, G_m = \Delta I_{ds} / \Delta V_{gs};$<br>$\Delta V_{gs} = V_{gs1} - V_{gs2}$<br>$V_{gs1} = 0.55\text{V}, V_{gs2} = 0.5\text{V}$ | mmho          | —         | 1872         | —         |
| $I_{gss}$ | Gate Leakage Current  | $V_{ds} = 0\text{V}, V_{gs} = -4.5\text{V}$  | $\mu\text{A}$ | -30       | -0.8         | —         |
| NF        | Noise Figure <sup>[1]</sup>                                   | $f = 2\text{ GHz}$<br>$f = 900\text{ MHz}$   | dB<br>dB      | —<br>—    | 1<br>—       | —<br>—    |
| G         | Gain <sup>[1]</sup>   | $f = 2\text{ GHz}$<br>$f = 900\text{ MHz}$   | dB<br>dB      | 13.5<br>— | 15<br>16.6   | 16.5<br>— |
| OIP3      | Output 3 <sup>rd</sup> Order Intercept Point <sup>[1,2]</sup> | $f = 2\text{ GHz}$<br>$f = 900\text{ MHz}$   | dBm<br>dBm    | 43<br>—   | 45.5<br>42   | —<br>—    |
| P1dB      | Output 1dB Compressed <sup>[1]</sup>                          | $f = 2\text{ GHz}$<br>$f = 900\text{ MHz}$   | dBm<br>dBm    | 27.5<br>— | 29<br>27.3   | —<br>—    |
| PAE       | Power Added Efficiency <sup>[1]</sup>                         | $f = 2\text{ GHz}$<br>$f = 900\text{ MHz}$   | %<br>%        | 50<br>—   | 65<br>49     | —<br>—    |
| ACLR      | Adjacent Channel Leakage Power Ratio <sup>[1,3]</sup>         | Offset BW = 5 MHz<br>Offset BW = 10 MHz  | dBc<br>dBc    | —<br>—    | 63.9<br>64.1 | —<br>—    |

### Notes:

- Measurements at 2 GHz obtained using production test board described in Figure 2 while measurement at 0.9GHz obtained from load pull tuner.
- i ) 2 GHz OIP3 test condition:  $F_1 = 2.0\text{ GHz}, F_2 = 2.01\text{ GHz}$  and  $P_{in} = -5\text{ dBm}$  per tone.  
ii ) 900 MHz OIP3 test condition:  $F_1 = 900\text{ MHz}, F_2 = 910\text{ MHz}$  and  $P_{in} = -5\text{ dBm}$  per tone.
- ACLR test spec is based on 3GPP TS 25.141 V5.3.1 (2002-06)
  - Test Model 1
  - Active Channels: PCCPCH + SCH + CPICH + PICH + SCCPCH + 64 DPCH (SF=128)
  - Freq = 2140 MHz
  - $P_{in} = -5\text{ dBm}$
  - Channel Integrate Bandwidth = 3.84 MHz
- Use proper bias, board, heatsinking and derating designs to ensure max channel temperature is not exceeded.  
See absolute max ratings and application note for more details.

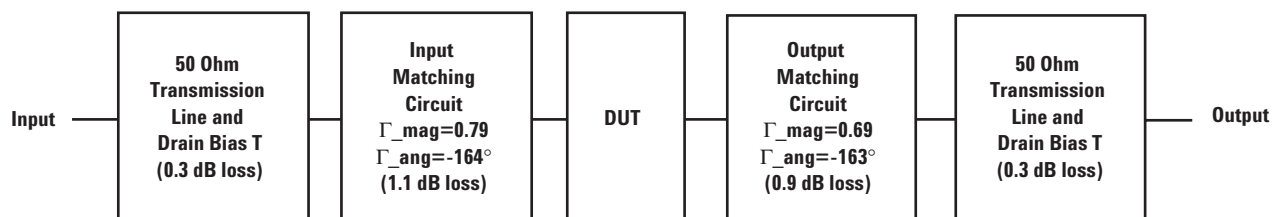


Figure 6. Block diagram of the 2 GHz production test board used for NF, Gain, OIP3, P1dB and PAE measurements at 2 GHz. This circuit achieves a trade-off between optimal OIP3, P1dB and VSWR. Circuit losses have been de-embedded from actual measurements.

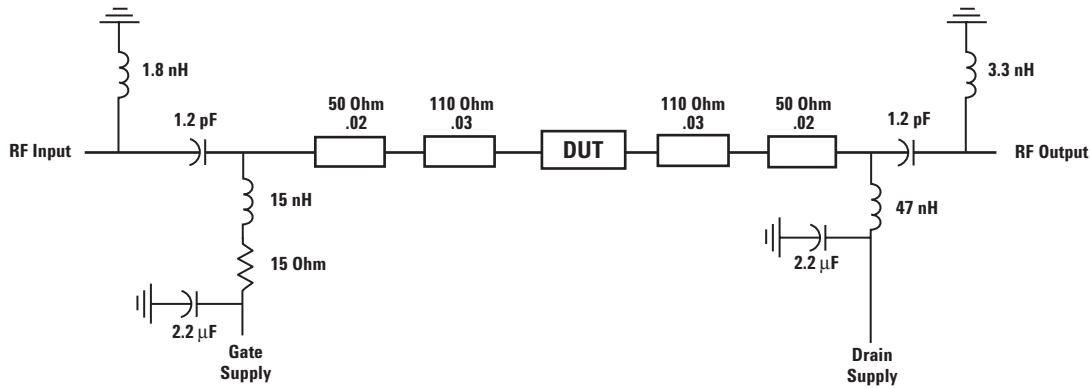


Figure 3. Simplified schematic of production test board. Primary purpose is to show 15 Ohm series resistor placement in gate supply. Transmission line tapers, tee intersections, bias lines and parasitic values are not shown.

### Gamma Load and Source at Optimum OIP3 and P1dB Tuning Conditions

The device's optimum OIP3 and P1dB measurements were determined using a load pull system at 4.5V 280 mA and 4.5V 400 mA quiescent bias respectively:

#### Typical Gammas at Optimum OIP3 at 4.5V 280 mA

| Freq (GHz) | Optimized for maximum OIP3 at 4.5V 280 mA |       |       |       | Gamma Source   | Gamma Load   |
|------------|---|-------|-------|-------|----------------|--------------|
|            | OIP3                                      | Gain  | P1dB  | PAE   |                |              |
| 0.9        | 46.42                                     | 16.03 | 26.67 | 45.80 | 0.305 < -140   | 0.577 < 162  |
| 2.0        | 45.50                                     | 15.07 | 28.93 | 50.30 | 0.806 < -179.2 | 0.511 < 164  |
| 2.4        | 44.83                                     | 12.97 | 29.03 | 45.70 | 0.756 < -167   | 0.589 < -168 |
| 3.9        | 43.97                                     | 6.11  | 27.33 | 33.90 | 0.782 < -162   | 0.524 < -153 |

#### Typical Gammas at Optimum P1dB at 4.5V 280mA

| Freq (GHz) | Optimized for maximum P1dB at 4.5V 280 mA |       |       |       | Gamma Source | Gamma Load   |
|------------|---|-------|-------|-------|--------------|--------------|
|            | OIP3                                      | Gain  | P1dB  | PAE   |              |              |
| 0.9        | 39.29                                     | 20.90 | 30.49 | 41.00 | 0.859 < 165  | 0.757 < 179  |
| 2.0        | 41.79                                     | 14.72 | 30.60 | 45.30 | 0.76 < -171  | 0.691 < -168 |
| 2.4        | 42.37                                     | 11.25 | 30.24 | 39.70 | 0.745 < -166 | 0.694 < -161 |
| 3.9        | 42.00                                     | 5.63  | 28.26 | 25.80 | 0.759 < -159 | 0.708 < -149 |

#### Typical Gammas at Optimum OIP3 at 4.5V 400 mA

| Freq (GHz) | Optimized for maximum OIP3 at 4.5V 400 mA |       |       |       | Gamma Source     | Gamma Load       |
|------------|---|-------|-------|-------|------------------|------------------|
|            | OIP3                                      | Gain  | P1dB  | PAE   |                  |                  |
| 0.9        | 49.15                                     | 16.85 | 27.86 | 44.20 | 0.5852 < -135.80 | 0.4785 < 177.00  |
| 2.0        | 48.18                                     | 14.72 | 29.36 | 48.89 | 0.7267 < -175.37 | 0.7338 < 179.56  |
| 2.4        | 47.54                                     | 12.47 | 29.10 | 46.83 | 0.6155 < -171.71 | 0.5411 < -172.02 |
| 3.9        | 45.44                                     | 8.05  | 28.49 | 37.02 | 0.7888 < -148.43 | 0.5247 < -145.84 |

#### Typical Gammas at Optimum P1dB at 4.5V 400 mA

| Freq (GHz) | Optimized for maximum P1dB at 4.5V 400 mA |       |       |       | Gamma Source     | Gamma Load       |
|------------|---|-------|-------|-------|------------------|------------------|
|            | OIP3                                      | Gain  | P1dB  | PAE   |                  |                  |
| 0.9        | 41.78                                     | 21.84 | 31.23 | 49.97 | 0.7765 < 168.50  | 0.7589 < -175.09 |
| 2.0        | 43.28                                     | 14.83 | 31.03 | 44.78 | 0.8172 < -175.74 | 0.8011 < -165.75 |
| 2.4        | 42.46                                     | 11.90 | 30.66 | 41.00 | 0.8149 < -163.78 | 0.8042 < -161.79 |
| 3.9        | 42.94                                     | 7.70  | 29.56 | 33.06 | 0.8394 < -151.21 | 0.7826 < -149.00 |

**ATF-501P8 Typical Performance Curves (at 25°C unless specified otherwise)**  
**Tuned for Optimal OIP3 at 4.5V 280 mA**

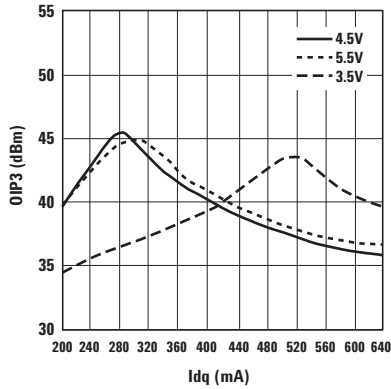


Figure 8. OIP3 vs. Idq and Vds at 2 GHz.

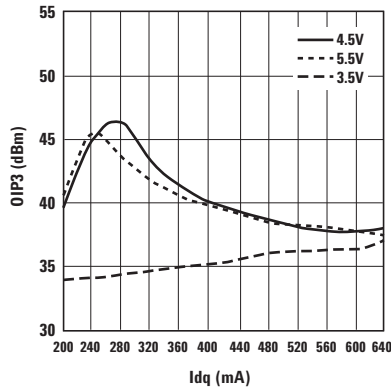


Figure 9. OIP3 vs. Idq and Vds at 0.9 GHz.

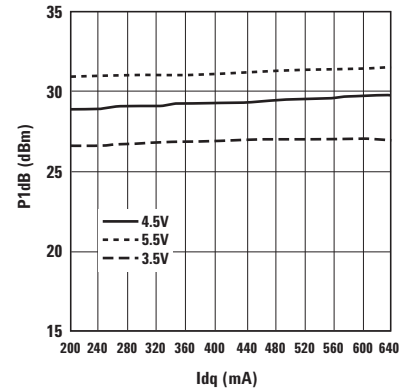


Figure 10. P1dB vs. Idq and Vds at 2 GHz.

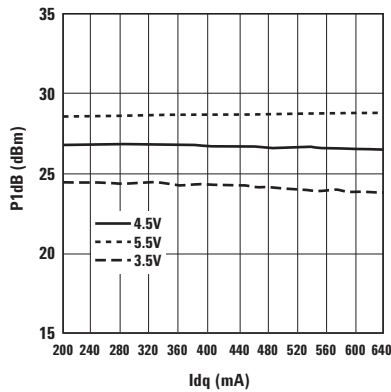


Figure 11. P1dB vs. Idq and Vds at 0.9 GHz.

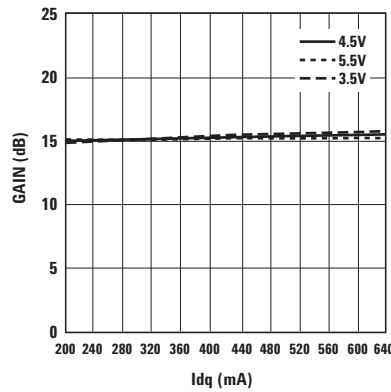


Figure 12. Gain vs. Idq and Vds at 2 GHz.

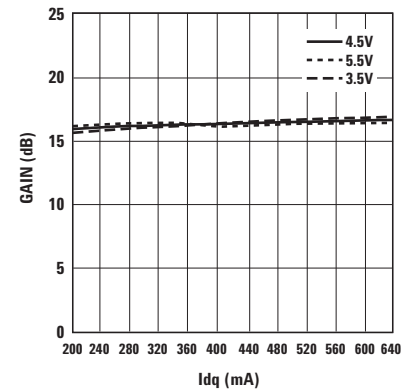


Figure 13. Gain vs. Idq and Vds at 0.9 GHz.

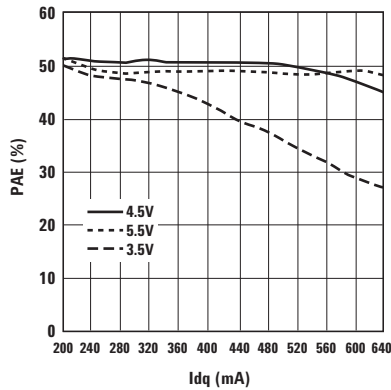


Figure 14. PAE vs. Idq and Vds at 2 GHz.

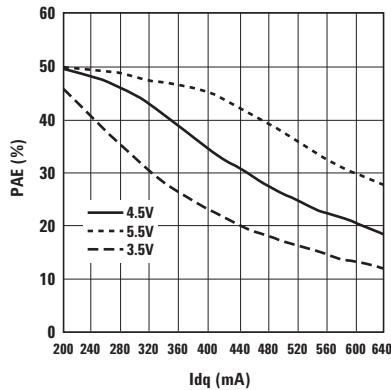


Figure 15. PAE vs. Idq and Vds at 0.9 GHz.

**ATF-501P8 Typical Performance Curves (at 25°C unless specified otherwise)**  
**Tuned for Optimal P1dB at 4.5V 280 mA**

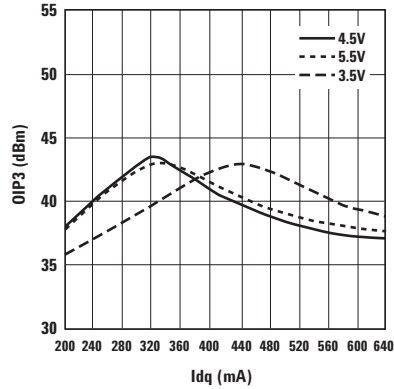


Figure 16. OIP3 vs. Idq and Vds at 2 GHz.

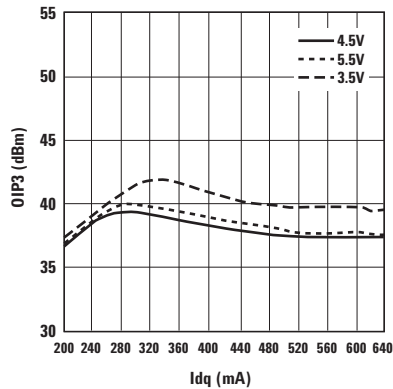


Figure 17. OIP3 vs. Idq and Vds at 0.9 GHz.

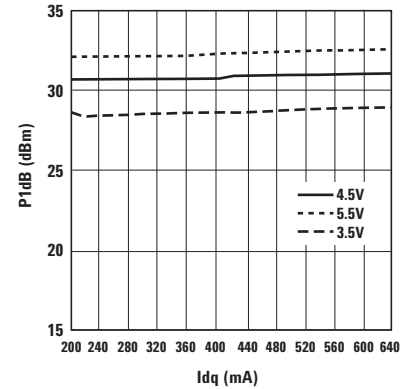


Figure 18. P1dB vs. Idq and Vds at 2 GHz.

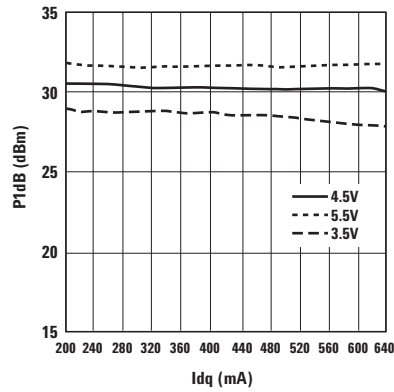


Figure 19. P1dB vs. Idq and Vds at 0.9 GHz.

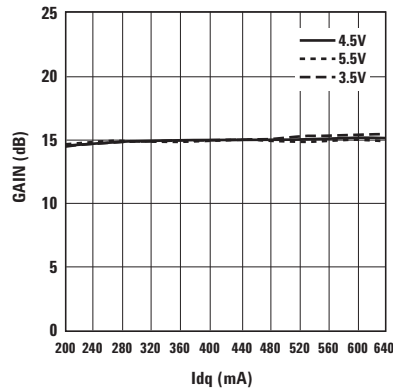


Figure 20. Gain vs. Idq and Vds at 2 GHz.

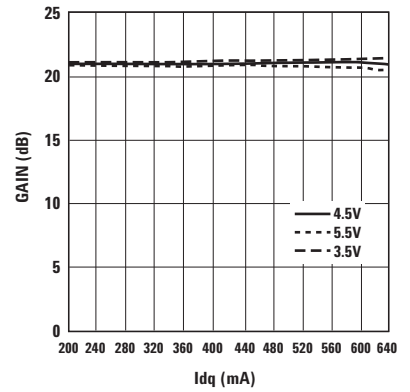


Figure 21. Gain vs. Idq and Vds at 0.9 GHz.

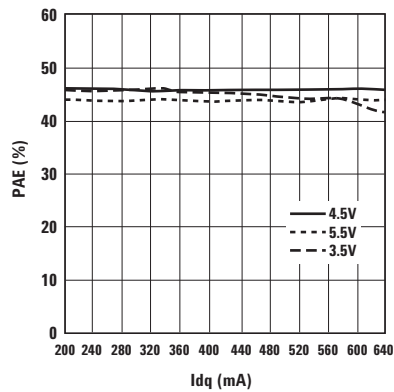


Figure 22. PAE vs. Idq and Vds at 2 GHz.



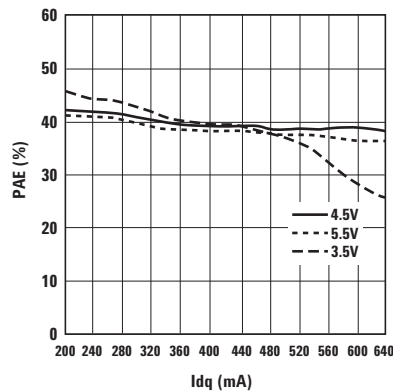


Figure 23. PAE vs. Idq and Vds at 0.9 GHz.


**ATF-501P8 Typical Performance Curves (at 25°C unless specified otherwise)**  
**Tuned for Optimum OIP3 at 4.5V 280 mA**

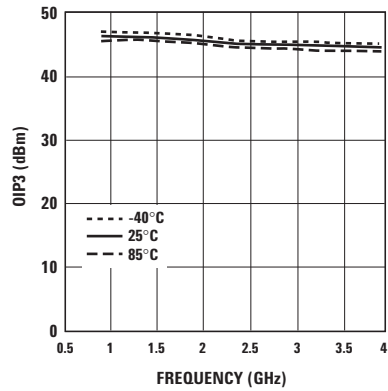


**Figure 24. OIP3 vs. Temperature and Frequency at Optimal OIP3.**

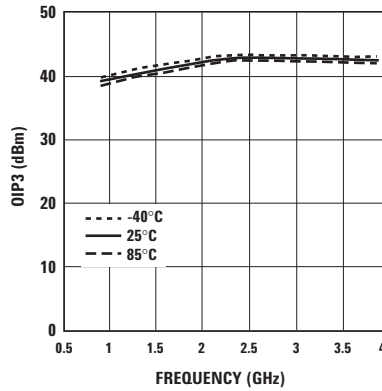


**Figure 25. OIP3 vs. Temperature and Frequency at Optimal P1dB.**

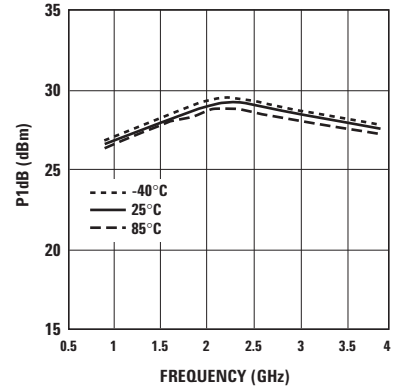


**Figure 26. P1dB vs. Temperature and Frequency at Optimal OIP3.**

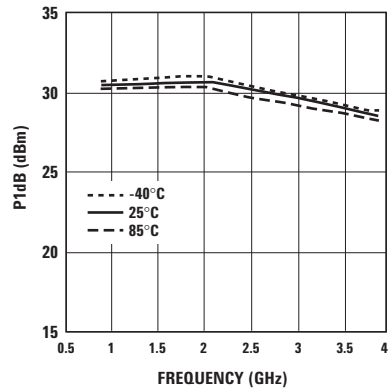


**Figure 27. P1dB vs. Temperature and Frequency at Optimal P1dB.**

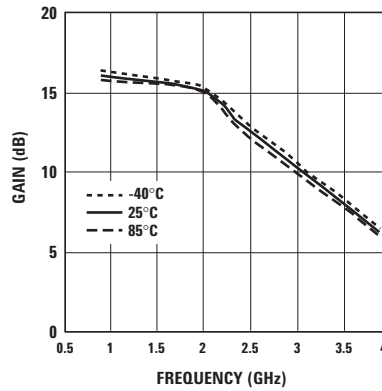


**Figure 28. Gain vs. Temperature and Frequency at Optimal OIP3.**

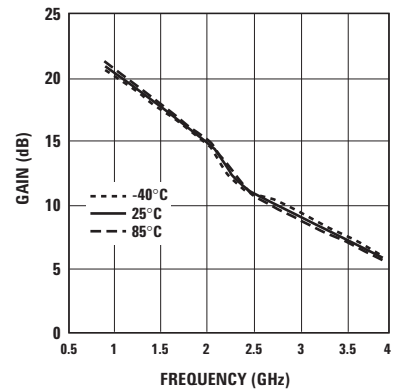

**Figure 29. Gain vs. Temperature and Frequency at Optimal P1dB.**

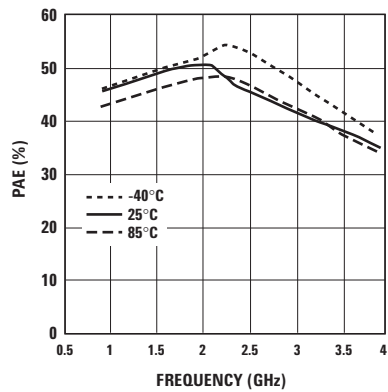

**Figure 30. PAE vs. Temperature and Frequency at Optimal OIP3.**

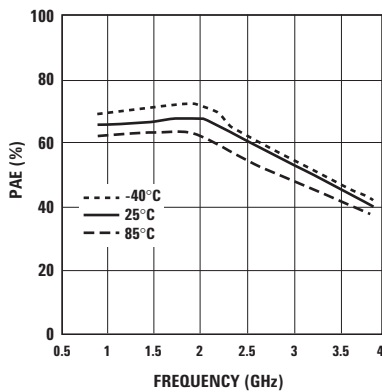

**Figure 31. PAE vs. Temperature and Frequency at Optimal P1dB.**

**ATF-501P8 Typical Performance Curves (at 25°C unless specified otherwise)**  
**Tuned for Optimal OIP3 at 4.5V 400 mA**

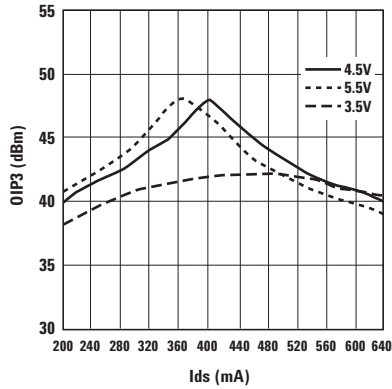


Figure 32. OIP3 vs. Ids and Vds at 2 GHz.

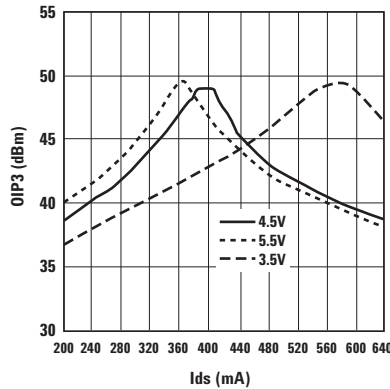


Figure 33. OIP3 vs. Ids and Vds at 900 MHz.

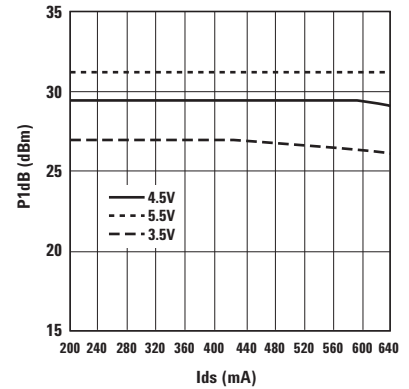


Figure 34. P1dB vs. Ids and Vds at 2 GHz.

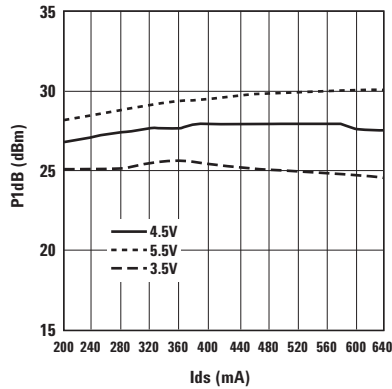


Figure 35. P1dB vs. Ids and Vds at 900 MHz.

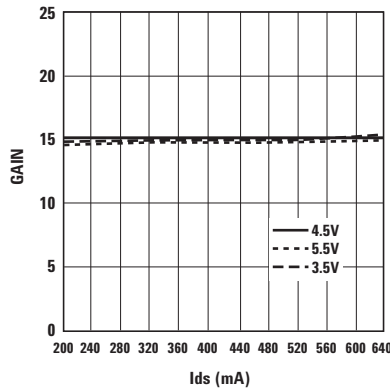


Figure 36. Gain vs. Ids and Vds at 2 GHz.

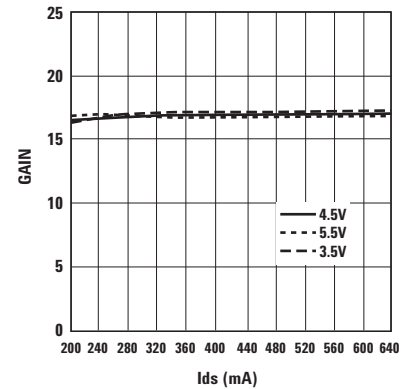


Figure 37. Gain vs. Ids and Vds at 900 MHz.

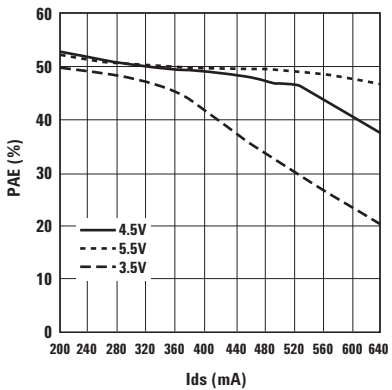


Figure 38. PAE vs. Ids and Vds at 2 GHz.

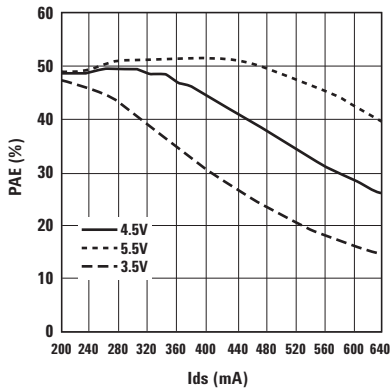


Figure 39. PAE vs. Ids and Vds at 900 MHz.

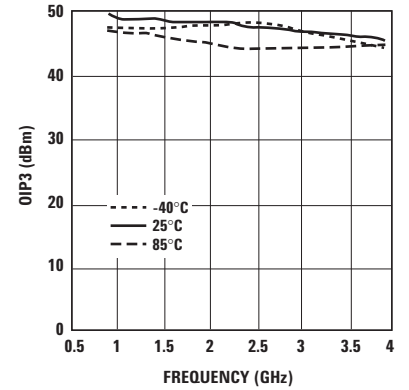



Figure 40. OIP3 vs. Temperature and Frequency at optimum OIP3.

**Note:**


Bias current (Ids) for the above charts are quiescent conditions. Actual level may increase or decrease depending on amount of RF drive.




**ATF-501P8 Typical Performance Curves, continued (at 25°C unless specified otherwise)  
Tuned for Optimal OIP3 at 4.5V 400 mA**

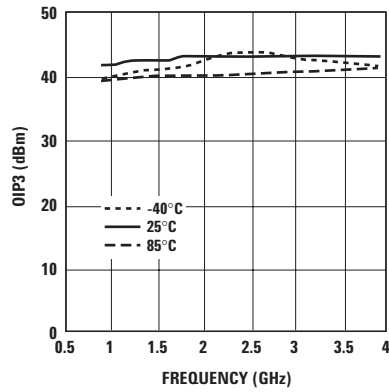


**Figure 41. OIP3 vs. Temperature and Frequency at optimum P1dB.**

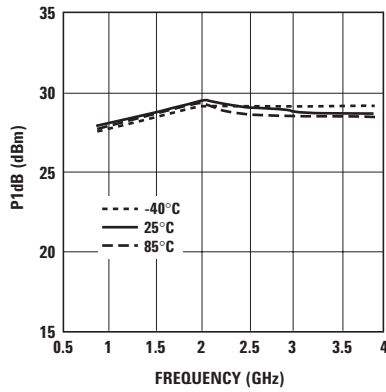


**Figure 42. P1dB vs. Temperature and Frequency at optimum OIP3.**

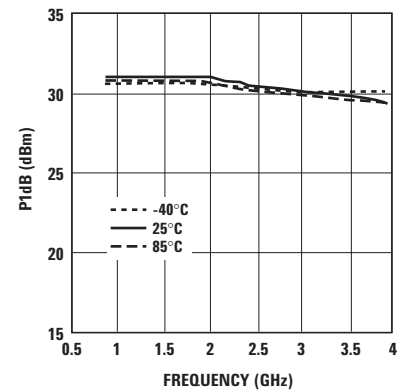


**Figure 43. P1dB vs. Temperature and Frequency at optimum P1dB.**

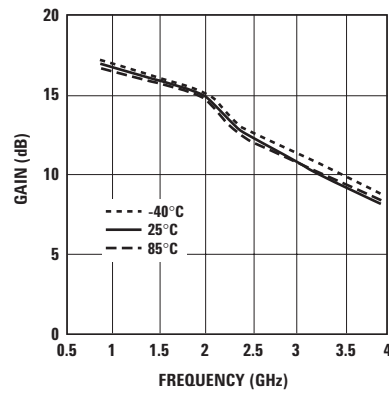


**Figure 44. Gain vs. Temperature and Frequency at optimum OIP3.**

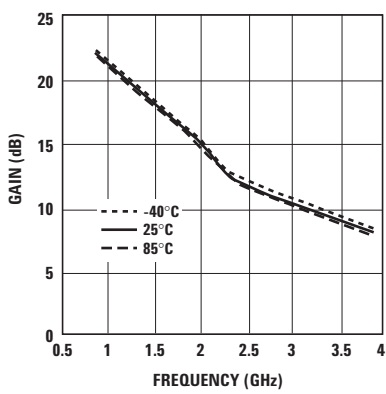


**Figure 45. Gain vs. Temperature and Frequency at optimum P1dB.**

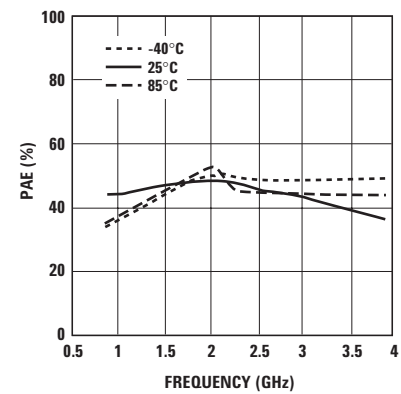


**Figure 46. PAE vs. Temperature and Frequency at optimum OIP3.**

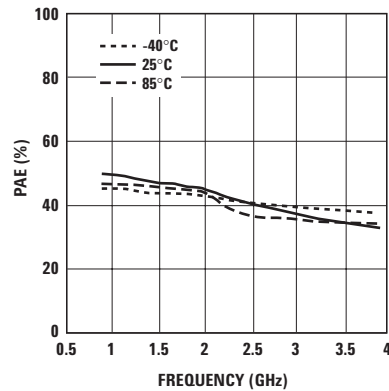

**Figure 47. PAE vs. Temperature and Frequency at optimum P1dB.**

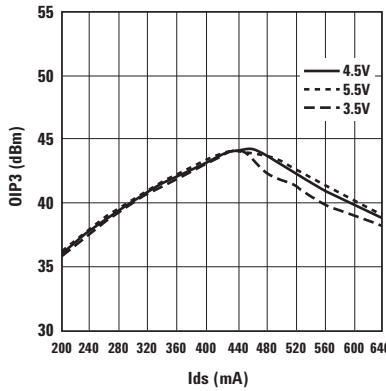

**Figure 48. OIP3 vs. Ids and Vds at 2 GHz.**

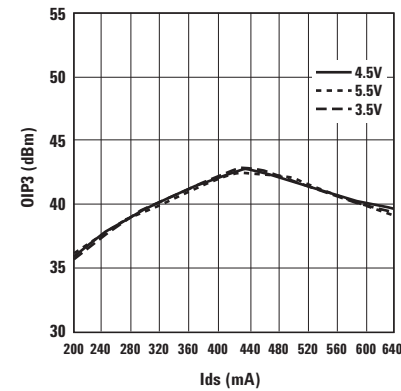

**Figure 49. OIP3 vs. Ids and Vds at 900 MHz.**

**Note:**

Bias current (Ids) for the above charts are quiescent conditions. Actual level may increase or decrease depending on amount of RF drive.

**ATF-501P8 Typical Performance Curves, continued (at 25°C unless specified otherwise)  
Tuned for Optimal P1dB at 4.5V 400 mA**

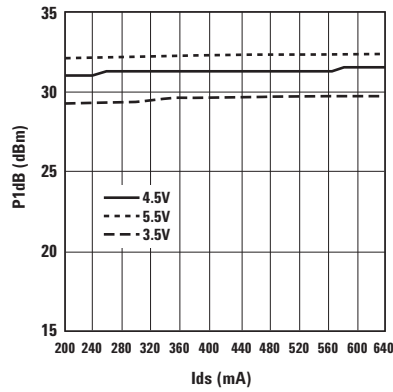


Figure 50. P1dB vs. Ids and Vds at 2 GHz.

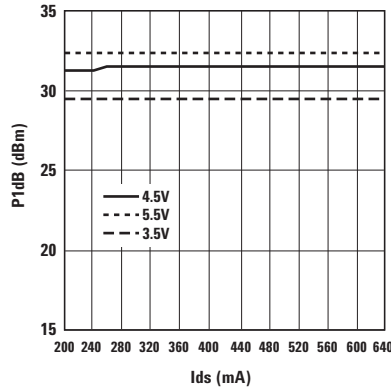


Figure 51. P1dB vs. Ids and Vds at 900 MHz.

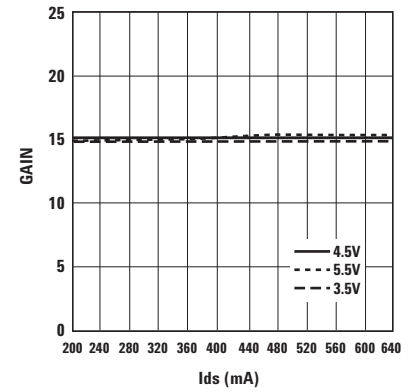


Figure 52. Gain vs. Ids and Vds at 2 GHz.

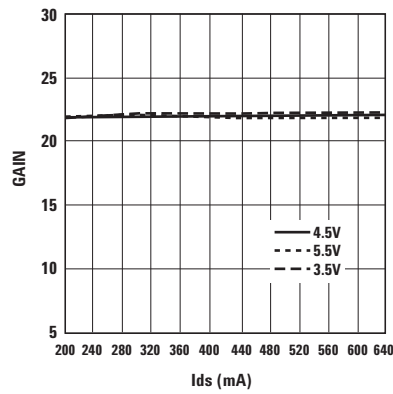


Figure 53. Gain vs. Ids and Vds at 900 MHz.

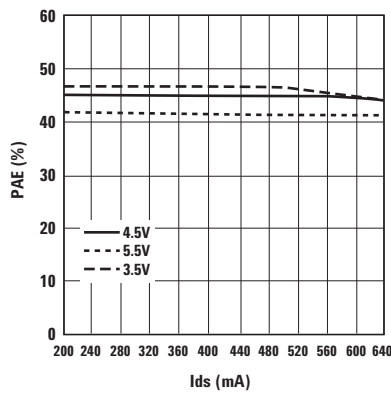


Figure 54. PAE vs. Ids and Vds at 2 GHz.

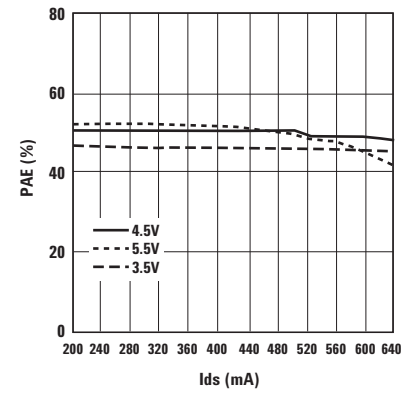


Figure 55. PAE vs. Ids and Vds at 900 MHz.

**Note:**

Bias current (Ids) for the above charts are quiescent conditions. Actual level may increase or decrease depending on amount of RF drive.

ATF-501P8 Typical Scattering Parameters,  $V_{DS} = 4.5V$ ,  $I_{DS} = 280\text{ mA}$

| Freq.<br>GHz | $S_{11}$ |        |       | $S_{21}$ |       |       | $S_{12}$ |       |       | $S_{22}$ |      | MSG/MAG<br>dB | K<br>factor |
|--------------|----------|--------|-------|----------|-------|-------|----------|-------|-------|----------|------|---------------|-------------|
|              | Mag.     | Ang.   | dB    | Mag.     | Ang.  | dB    | Mag.     | Ang.  | Mag.  | Ang.     |      |               |             |
| 0.1          | 0.915    | -132.3 | 31.6  | 37.990   | 112.2 | -38.4 | 0.012    | 29.3  | 0.647 | -160.6   | 35.0 | 0.173         |             |
| 0.2          | 0.911    | -156.2 | 26.2  | 20.324   | 99.9  | -37.7 | 0.013    | 24.0  | 0.689 | -171.1   | 31.9 | 0.314         |             |
| 0.3          | 0.910    | -165.4 | 22.8  | 13.783   | 94.5  | -37.1 | 0.014    | 24.5  | 0.699 | -175.7   | 29.9 | 0.436         |             |
| 0.4          | 0.910    | -170.9 | 20.3  | 10.342   | 91.1  | -37.1 | 0.014    | 27.3  | 0.702 | -178.5   | 28.7 | 0.569         |             |
| 0.5          | 0.908    | -173.4 | 18.7  | 8.604    | 88.4  | -36.5 | 0.015    | 29.6  | 0.691 | -179.9   | 27.6 | 0.648         |             |
| 0.6          | 0.907    | -176.1 | 17.1  | 7.194    | 86.1  | -35.9 | 0.016    | 32.4  | 0.691 | 178.5    | 26.5 | 0.736         |             |
| 0.7          | 0.908    | -178.5 | 15.8  | 6.167    | 84.1  | -35.4 | 0.017    | 34.4  | 0.694 | 177.2    | 25.6 | 0.800         |             |
| 0.8          | 0.905    | 179.8  | 14.7  | 5.407    | 82.1  | -34.9 | 0.018    | 36.3  | 0.695 | 175.2    | 24.8 | 0.871         |             |
| 0.9          | 0.909    | 178.2  | 13.6  | 4.799    | 80.3  | -34.4 | 0.019    | 38.3  | 0.692 | 175.1    | 24.0 | 0.906         |             |
| 1            | 0.909    | 176.6  | 12.7  | 4.308    | 78.3  | -34.0 | 0.020    | 39.9  | 0.692 | 173.9    | 23.3 | 0.953         |             |
| 1.5          | 0.902    | 170.5  | 9.1   | 2.859    | 70.3  | -31.7 | 0.026    | 45.0  | 0.698 | 169.4    | 18.2 | 1.128         |             |
| 2            | 0.902    | 166.0  | 7.1   | 2.264    | 64.4  | -30.5 | 0.030    | 46.9  | 0.700 | 165.6    | 16.0 | 1.209         |             |
| 2.5          | 0.901    | 165.0  | 6.6   | 2.134    | 63.1  | -30.2 | 0.031    | 47.2  | 0.699 | 163.0    | 15.4 | 1.241         |             |
| 3            | 0.901    | 161.1  | 5.0   | 1.772    | 57.7  | -28.9 | 0.036    | 47.4  | 0.697 | 159.1    | 13.8 | 1.278         |             |
| 4            | 0.898    | 155.0  | 3.0   | 1.412    | 49.3  | -27.3 | 0.043    | 46.5  | 0.707 | 153.7    | 11.7 | 1.326         |             |
| 5            | 0.902    | 145.0  | 0.9   | 1.110    | 37.6  | -24.7 | 0.058    | 43.5  | 0.699 | 146.8    | 9.7  | 1.272         |             |
| 6            | 0.893    | 134.9  | -0.9  | 0.902    | 22.6  | -22.9 | 0.072    | 35.6  | 0.697 | 145.3    | 7.8  | 1.286         |             |
| 7            | 0.899    | 125.8  | -3.3  | 0.687    | 9.0   | -22.2 | 0.078    | 27.3  | 0.652 | 134.1    | 5.7  | 1.394         |             |
| 8            | 0.895    | 115.6  | -4.4  | 0.604    | -1.1  | -20.8 | 0.091    | 22.0  | 0.646 | 117.4    | 4.2  | 1.463         |             |
| 9            | 0.898    | 105.5  | -5.3  | 0.542    | -13.0 | -19.6 | 0.105    | 12.3  | 0.641 | 115.5    | 3.2  | 1.447         |             |
| 10           | 0.886    | 95.5   | -5.9  | 0.505    | -20.2 | -18.9 | 0.114    | 9.7   | 0.695 | 104.5    | 2.5  | 1.455         |             |
| 11           | 0.868    | 84.7   | -6.6  | 0.469    | -29.7 | -17.6 | 0.132    | 0.5   | 0.742 | 91.3     | 1.6  | 1.431         |             |
| 12           | 0.862    | 74.0   | -8.0  | 0.398    | -40.8 | -17.4 | 0.135    | -6.3  | 0.735 | 88.1     | -0.1 | 1.661         |             |
| 13           | 0.847    | 64.5   | -7.9  | 0.403    | -47.5 | -16.0 | 0.159    | -12.3 | 0.766 | 78.4     | -0.1 | 1.491         |             |
| 14           | 0.844    | 55.6   | -8.5  | 0.377    | -58.4 | -15.3 | 0.171    | -21.3 | 0.800 | 68.9     | -0.3 | 1.397         |             |
| 15           | 0.837    | 47.4   | -9.0  | 0.354    | -67.2 | -14.6 | 0.187    | -30.1 | 0.797 | 65.6     | -1.1 | 1.414         |             |
| 16           | 0.824    | 39.9   | -9.7  | 0.327    | -72.0 | -14.2 | 0.194    | -36.8 | 0.763 | 51.5     | -2.3 | 1.608         |             |
| 17           | 0.821    | 31.6   | -9.8  | 0.323    | -82.7 | -13.4 | 0.215    | -44.6 | 0.786 | 38.9     | -2.4 | 1.488         |             |
| 18           | 0.805    | 24.6   | -10.5 | 0.298    | -90.1 | -12.5 | 0.237    | -51.8 | 0.781 | 29.5     | -3.5 | 1.575         |             |

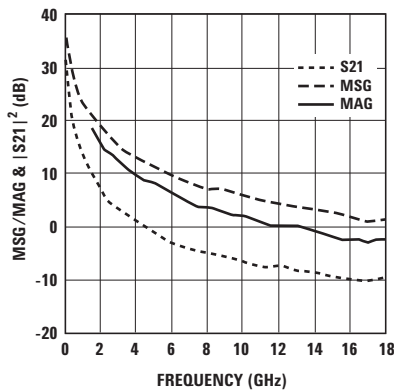


Figure 56. MSG/MAG &  $|S_{21}|^2$  vs. Frequency at 4.5V 280mA.

Notes:

1. S parameter is measured on a microstrip line made on 0.025 inch thick alumina carrier. The input reference plane is at the end of the gate lead. The output reference plane is at the end of the drain lead.

ATF-501P8 Typical Scattering Parameters,  $V_{DS} = 4.5V$ ,  $I_{DS} = 200\text{ mA}$

| Freq.<br>GHz | $S_{11}$ |        |       | $S_{21}$ |       |       | $S_{12}$ |       |       | $S_{22}$ |      | MSG/MAG<br>dB | K<br>factor |
|--------------|----------|--------|-------|----------|-------|-------|----------|-------|-------|----------|------|---------------|-------------|
|              | Mag.     | Ang.   | dB    | Mag.     | Ang.  | dB    | Mag.     | Ang.  | Mag.  | Ang.     |      |               |             |
| 0.1          | 0.922    | -131.5 | 31.1  | 35.978   | 112.6 | -37.7 | 0.013    | 28.9  | 0.664 | -159.8   | 34.4 | 0.142         |             |
| 0.2          | 0.914    | -155.7 | 25.7  | 19.290   | 100.1 | -36.5 | 0.015    | 22.4  | 0.709 | -170.7   | 31.1 | 0.274         |             |
| 0.3          | 0.914    | -165.2 | 22.3  | 13.088   | 94.7  | -36.5 | 0.015    | 22.5  | 0.719 | -175.4   | 29.4 | 0.390         |             |
| 0.4          | 0.911    | -170.5 | 19.8  | 9.814    | 91.4  | -35.9 | 0.016    | 24.9  | 0.722 | -178.4   | 27.9 | 0.510         |             |
| 0.5          | 0.911    | -173.3 | 18.3  | 8.176    | 88.6  | -35.4 | 0.017    | 26.8  | 0.713 | -179.9   | 26.8 | 0.577         |             |
| 0.6          | 0.912    | -176.0 | 16.7  | 6.834    | 86.4  | -34.9 | 0.018    | 29.3  | 0.713 | -178.6   | 25.8 | 0.653         |             |
| 0.7          | 0.910    | -178.3 | 15.4  | 5.861    | 84.3  | -34.4 | 0.019    | 31.3  | 0.716 | -177.2   | 24.9 | 0.725         |             |
| 0.8          | 0.910    | -179.9 | 14.2  | 5.141    | 82.3  | -34.4 | 0.019    | 33.0  | 0.718 | -175.5   | 24.3 | 0.801         |             |
| 0.9          | 0.913    | -178.4 | 13.2  | 4.558    | 80.5  | -34.0 | 0.020    | 34.9  | 0.712 | -175.0   | 23.6 | 0.840         |             |
| 1            | 0.910    | -176.8 | 12.2  | 4.092    | 78.7  | -33.6 | 0.021    | 36.6  | 0.714 | -173.8   | 22.9 | 0.903         |             |
| 1.5          | 0.904    | -170.5 | 8.7   | 2.718    | 70.5  | -31.4 | 0.027    | 41.7  | 0.721 | -169.0   | 18.3 | 1.077         |             |
| 2            | 0.905    | -166.1 | 6.7   | 2.153    | 64.9  | -30.2 | 0.031    | 44.2  | 0.721 | -165.2   | 16.0 | 1.161         |             |
| 2.5          | 0.905    | -165.2 | 6.1   | 2.027    | 63.7  | -29.9 | 0.032    | 44.5  | 0.719 | -162.5   | 15.4 | 1.188         |             |
| 3            | 0.906    | -161.1 | 4.5   | 1.684    | 58.3  | -28.6 | 0.037    | 44.9  | 0.715 | -158.5   | 13.7 | 1.227         |             |
| 4            | 0.905    | -154.9 | 2.6   | 1.354    | 50.3  | -27.1 | 0.044    | 44.3  | 0.725 | -152.9   | 11.8 | 1.262         |             |
| 5            | 0.904    | -145.1 | 0.4   | 1.053    | 38.5  | -24.7 | 0.058    | 41.6  | 0.716 | -145.7   | 9.5  | 1.271         |             |
| 6            | 0.899    | -134.9 | -1.3  | 0.863    | 23.9  | -22.9 | 0.072    | 34.1  | 0.712 | -144.1   | 7.7  | 1.263         |             |
| 7            | 0.905    | -126.0 | -3.6  | 0.661    | 10.5  | -22.2 | 0.078    | 26.0  | 0.660 | -132.9   | 5.6  | 1.371         |             |
| 8            | 0.902    | -115.8 | -4.6  | 0.587    | 0.3   | -20.8 | 0.091    | 20.8  | 0.654 | -116.3   | 4.2  | 1.423         |             |
| 9            | 0.900    | -106.4 | -5.6  | 0.527    | -11.1 | -19.6 | 0.105    | 11.1  | 0.649 | -114.4   | 3.0  | 1.451         |             |
| 10           | 0.894    | -95.9  | -6.1  | 0.498    | -17.7 | -18.9 | 0.114    | 8.4   | 0.700 | -103.4   | 2.6  | 1.412         |             |
| 11           | 0.882    | -84.9  | -7.0  | 0.448    | -26.8 | -17.7 | 0.130    | -0.9  | 0.746 | -90.5    | 1.6  | 1.407         |             |
| 12           | 0.873    | -74.3  | -8.1  | 0.393    | -38.8 | -17.5 | 0.133    | -7.5  | 0.738 | -87.3    | 0.1  | 1.614         |             |
| 13           | 0.856    | -64.6  | -8.1  | 0.393    | -45.4 | -16.1 | 0.156    | -13.1 | 0.768 | -77.8    | -0.1 | 1.492         |             |
| 14           | 0.853    | -56.0  | -8.4  | 0.380    | -55.0 | -15.6 | 0.166    | -21.4 | 0.800 | -68.4    | -0.2 | 1.399         |             |
| 15           | 0.837    | -47.4  | -8.8  | 0.361    | -64.1 | -14.8 | 0.182    | -29.6 | 0.799 | -65.2    | -1.0 | 1.439         |             |
| 16           | 0.829    | -40.6  | -9.2  | 0.345    | -72.0 | -14.4 | 0.190    | -35.9 | 0.763 | -51.1    | -1.8 | 1.556         |             |
| 17           | 0.828    | -32.7  | -9.5  | 0.336    | -80.5 | -13.4 | 0.213    | -43.3 | 0.787 | -38.5    | -2.0 | 1.449         |             |
| 18           | 0.807    | -26.1  | -10.2 | 0.310    | -88.2 | -12.5 | 0.236    | -50.5 | 0.782 | -29.1    | -3.2 | 1.542         |             |

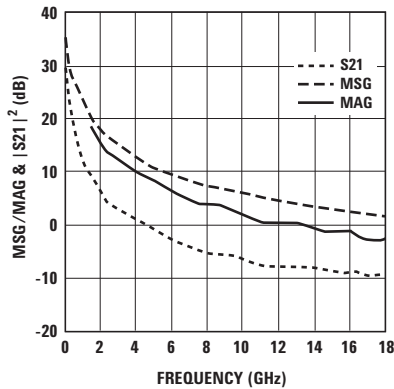



Figure 57. MSG/MAG &  $|S_{21}|^2$  vs. Frequency at 4.5V 200mA.

Notes:

1. S parameter is measured on a microstrip line made on 0.025 inch thick alumina carrier. The input reference plane is at the end of the gate lead. The output reference plane is at the end of the drain lead.

ATF-501P8 Typical Scattering Parameters,  $V_{DS} = 4.5V$ ,  $I_{DS} = 360\text{ mA}$

| Freq.<br>GHz | $S_{11}$ |        |       | $S_{21}$ |       |       | $S_{12}$ |       |       | $S_{22}$ |      | MSG/MAG<br>dB | K<br>factor |
|--------------|----------|--------|-------|----------|-------|-------|----------|-------|-------|----------|------|---------------|-------------|
|              | Mag.     | Ang.   | dB    | Mag.     | Ang.  | dB    | Mag.     | Ang.  | Mag.  | Ang.     |      |               |             |
| 0.1          | 0.911    | -132.8 | 31.6  | 38.110   | 112.4 | -39.2 | 0.011    | 30.3  | 0.649 | -162.1   | 35.4 | 0.200         |             |
| 0.2          | 0.910    | -156.5 | 26.2  | 20.415   | 100.0 | -38.4 | 0.012    | 24.9  | 0.692 | -171.8   | 32.3 | 0.340         |             |
| 0.3          | 0.911    | -165.8 | 22.8  | 13.848   | 94.6  | -37.7 | 0.013    | 26.2  | 0.701 | -176.2   | 30.3 | 0.472         |             |
| 0.4          | 0.913    | -171.1 | 20.3  | 10.397   | 91.3  | -37.7 | 0.013    | 28.9  | 0.704 | -178.9   | 29.0 | 0.600         |             |
| 0.5          | 0.907    | -173.7 | 18.7  | 8.640    | 88.5  | -36.5 | 0.015    | 31.8  | 0.693 | -179.7   | 27.6 | 0.679         |             |
| 0.6          | 0.910    | -176.3 | 17.2  | 7.232    | 86.2  | -35.9 | 0.016    | 34.5  | 0.694 | -178.2   | 26.6 | 0.747         |             |
| 0.7          | 0.910    | -178.6 | 15.8  | 6.200    | 84.2  | -35.9 | 0.016    | 36.8  | 0.696 | -176.9   | 25.9 | 0.838         |             |
| 0.8          | 0.906    | 179.7  | 14.7  | 5.431    | 82.2  | -35.4 | 0.017    | 38.8  | 0.697 | -175.6   | 25.0 | 0.914         |             |
| 0.9          | 0.913    | 178.0  | 13.7  | 4.826    | 80.3  | -34.9 | 0.018    | 40.6  | 0.695 | -174.8   | 24.3 | 0.930         |             |
| 1            | 0.907    | 176.4  | 12.7  | 4.328    | 78.4  | -34.0 | 0.020    | 42.3  | 0.694 | -173.7   | 23.4 | 0.984         |             |
| 1.5          | 0.904    | 170.3  | 9.2   | 2.878    | 70.4  | -32.0 | 0.025    | 47.0  | 0.698 | -169.4   | 18.2 | 1.154         |             |
| 2            | 0.906    | 165.9  | 7.1   | 2.275    | 64.5  | -30.5 | 0.030    | 48.7  | 0.702 | -165.5   | 16.1 | 1.193         |             |
| 2.5          | 0.904    | 164.8  | 6.6   | 2.146    | 63.2  | -30.2 | 0.031    | 49.0  | 0.701 | -162.8   | 15.5 | 1.231         |             |
| 3            | 0.907    | 160.9  | 5.0   | 1.783    | 57.9  | -28.9 | 0.036    | 49.0  | 0.699 | -159.0   | 14.0 | 1.246         |             |
| 4            | 0.906    | 154.7  | 3.1   | 1.424    | 49.4  | -27.3 | 0.043    | 47.7  | 0.708 | -153.6   | 12.0 | 1.275         |             |
| 5            | 0.903    | 144.8  | 0.9   | 1.114    | 37.7  | -24.7 | 0.058    | 44.2  | 0.701 | -146.7   | 9.7  | 1.268         |             |
| 6            | 0.896    | 134.7  | -0.8  | 0.907    | 22.7  | -22.7 | 0.073    | 36.2  | 0.699 | -145.1   | 7.9  | 1.256         |             |
| 7            | 0.903    | 125.6  | -3.2  | 0.691    | 8.9   | -22.2 | 0.078    | 27.9  | 0.654 | -134.0   | 5.9  | 1.355         |             |
| 8            | 0.903    | 115.0  | -4.3  | 0.612    | -1.0  | -20.7 | 0.092    | 22.4  | 0.647 | -117.3   | 4.6  | 1.375         |             |
| 9            | 0.891    | 105.6  | -5.3  | 0.544    | -13.3 | -19.5 | 0.106    | 12.8  | 0.642 | -115.4   | 2.9  | 1.495         |             |
| 10           | 0.885    | 94.9   | -6.0  | 0.504    | -20.0 | -18.8 | 0.115    | 10.2  | 0.697 | -104.4   | 2.4  | 1.462         |             |
| 11           | 0.873    | 84.3   | -6.7  | 0.465    | -28.4 | -17.5 | 0.133    | 0.9   | 0.743 | -91.3    | 1.6  | 1.416         |             |
| 12           | 0.866    | 74.0   | -7.9  | 0.403    | -41.1 | -17.3 | 0.137    | -5.8  | 0.735 | -87.9    | 0.1  | 1.607         |             |
| 13           | 0.849    | 64.3   | -7.8  | 0.406    | -47.3 | -15.9 | 0.161    | -12.1 | 0.768 | -78.3    | 0.0  | 1.464         |             |
| 14           | 0.849    | 55.7   | -8.4  | 0.379    | -57.9 | -15.2 | 0.174    | -21.3 | 0.801 | -68.8    | -0.2 | 1.361         |             |
| 15           | 0.841    | 46.6   | -9.0  | 0.353    | -69.0 | -14.5 | 0.189    | -30.3 | 0.800 | -65.5    | -0.9 | 1.376         |             |
| 16           | 0.828    | 39.0   | -9.4  | 0.337    | -73.1 | -14.2 | 0.196    | -37.1 | 0.763 | -51.4    | -2.0 | 1.547         |             |
| 17           | 0.817    | 31.0   | -9.8  | 0.322    | -83.0 | -13.2 | 0.218    | -45.1 | 0.787 | -38.7    | -2.4 | 1.491         |             |
| 18           | 0.809    | 23.9   | -10.3 | 0.304    | -92.7 | -12.4 | 0.240    | -52.4 | 0.783 | -29.3    | -3.2 | 1.513         |             |

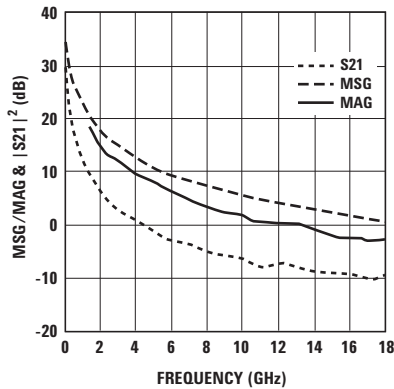

Notes:

1. S parameter is measured on a microstrip line made on 0.025 inch thick alumina carrier. The input reference plane is at the end of the gate lead. The output reference plane is at the end of the drain lead.

Figure 58. MSG/MAG &  $|S_{21}|^2$  vs. Frequency at 4.5V 360mA.

ATF-501P8 Typical Scattering Parameters,  $V_{DS} = 3.5V$ ,  $I_{DS} = 280\text{ mA}$

| Freq.<br>GHz | $S_{11}$ |        |      | $S_{21}$ |       |       | $S_{12}$ |       |       | $S_{22}$ |      | MSG/MAG<br>dB | K<br>factor |
|--------------|----------|--------|------|----------|-------|-------|----------|-------|-------|----------|------|---------------|-------------|
|              | Mag.     | Ang.   | dB   | Mag.     | Ang.  | dB    | Mag.     | Ang.  | Mag.  | Ang.     |      |               |             |
| 0.1          | 0.923    | -133.9 | 30.6 | 34.047   | 111.6 | -38.4 | 0.012    | 28.8  | 0.716 | -164.7   | 34.5 | 0.166         |             |
| 0.2          | 0.922    | -157.1 | 25.2 | 18.161   | 99.7  | -37.7 | 0.013    | 23.8  | 0.759 | -173.4   | 31.5 | 0.301         |             |
| 0.3          | 0.920    | -166.1 | 21.8 | 12.313   | 94.5  | -37.1 | 0.014    | 25.0  | 0.767 | -177.3   | 29.4 | 0.427         |             |
| 0.4          | 0.920    | -171.3 | 19.3 | 9.220    | 91.4  | -37.1 | 0.014    | 27.5  | 0.770 | -179.8   | 28.2 | 0.549         |             |
| 0.5          | 0.915    | -173.9 | 17.7 | 7.674    | 88.7  | -35.9 | 0.016    | 30.0  | 0.760 | -178.8   | 26.8 | 0.622         |             |
| 0.6          | 0.917    | -176.5 | 16.2 | 6.429    | 86.6  | -35.4 | 0.017    | 32.9  | 0.761 | -177.2   | 25.8 | 0.697         |             |
| 0.7          | 0.917    | -178.9 | 14.8 | 5.511    | 84.6  | -34.9 | 0.018    | 34.8  | 0.762 | -175.8   | 24.9 | 0.761         |             |
| 0.8          | 0.915    | -179.6 | 13.6 | 4.813    | 82.8  | -34.9 | 0.018    | 37.2  | 0.760 | -175.0   | 24.3 | 0.843         |             |
| 0.9          | 0.918    | -177.7 | 12.7 | 4.302    | 81.0  | -34.4 | 0.019    | 38.8  | 0.764 | -173.7   | 23.5 | 0.877         |             |
| 1            | 0.913    | -176.4 | 11.7 | 3.850    | 79.1  | -33.6 | 0.021    | 40.5  | 0.759 | -172.4   | 22.6 | 0.930         |             |
| 1.5          | 0.913    | -170.4 | 8.1  | 2.555    | 72.0  | -31.4 | 0.027    | 45.6  | 0.759 | -168.1   | 18.1 | 1.070         |             |
| 2            | 0.913    | -166.1 | 6.1  | 2.025    | 66.3  | -30.2 | 0.031    | 47.1  | 0.763 | -163.9   | 15.9 | 1.139         |             |
| 2.5          | 0.910    | -164.8 | 5.6  | 1.912    | 65.1  | -29.9 | 0.032    | 47.6  | 0.762 | -161.0   | 15.2 | 1.181         |             |
| 3            | 0.913    | -160.9 | 4.0  | 1.588    | 60.4  | -28.6 | 0.037    | 47.5  | 0.758 | -156.7   | 13.6 | 1.206         |             |
| 4            | 0.906    | -154.6 | 2.1  | 1.276    | 52.2  | -26.9 | 0.045    | 45.9  | 0.762 | -150.9   | 11.5 | 1.261         |             |
| 5            | 0.910    | -144.7 | 0.1  | 1.012    | 41.6  | -24.4 | 0.060    | 42.4  | 0.754 | -143.3   | 9.4  | 1.226         |             |
| 6            | 0.903    | -134.6 | -1.6 | 0.827    | 27.2  | -22.5 | 0.075    | 34.3  | 0.742 | -141.3   | 7.5  | 1.239         |             |
| 7            | 0.907    | -125.4 | -3.9 | 0.636    | 14.0  | -22.0 | 0.079    | 25.3  | 0.674 | -130.1   | 5.3  | 1.402         |             |
| 8            | 0.903    | -115.2 | -4.9 | 0.570    | 5.1   | -20.6 | 0.093    | 19.8  | 0.669 | -113.5   | 3.9  | 1.448         |             |
| 9            | 0.897    | -105.5 | -5.6 | 0.522    | -7.0  | -19.4 | 0.107    | 9.9   | 0.666 | -112.0   | 2.8  | 1.484         |             |
| 10           | 0.889    | -94.8  | -6.0 | 0.499    | -14.5 | -18.8 | 0.115    | 7.0   | 0.709 | -100.9   | 2.4  | 1.458         |             |
| 11           | 0.880    | -84.2  | -6.4 | 0.477    | -23.6 | -17.7 | 0.131    | -2.4  | 0.754 | -88.2    | 1.9  | 1.378         |             |
| 12           | 0.870    | -73.4  | -7.7 | 0.411    | -33.8 | -17.6 | 0.132    | -9.1  | 0.745 | -85.0    | 0.3  | 1.614         |             |
| 13           | 0.847    | -63.8  | -7.5 | 0.421    | -41.1 | -16.3 | 0.153    | -14.5 | 0.770 | -75.9    | 0.1  | 1.519         |             |
| 14           | 0.839    | -55.1  | -8.0 | 0.397    | -52.2 | -15.8 | 0.163    | -22.5 | 0.801 | -66.5    | -0.1 | 1.458         |             |
| 15           | 0.816    | -47.3  | -8.2 | 0.390    | -63.9 | -15.0 | 0.178    | -30.0 | 0.795 | -63.4    | -0.8 | 1.495         |             |
| 16           | 0.808    | -39.8  | -9.2 | 0.345    | -70.3 | -14.6 | 0.186    | -35.9 | 0.755 | -49.5    | -2.3 | 1.727         |             |
| 17           | 0.794    | -32.3  | -9.0 | 0.354    | -81.5 | -13.5 | 0.211    | -43.3 | 0.787 | -36.6    | -2.1 | 1.538         |             |
| 18           | 0.769    | -26.0  | -9.7 | 0.329    | -91.7 | -12.6 | 0.234    | -50.7 | 0.777 | -27.7    | -3.2 | 1.632         |             |

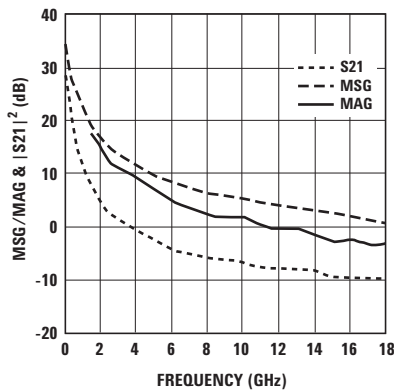


Figure 59. MSG/MAG &  $|S_{21}|^2$  vs. Frequency at 3.5V 280mA.

Notes:

1. S parameter is measured on a microstrip line made on 0.025 inch thick alumina carrier. The input reference plane is at the end of the gate lead. The output reference plane is at the end of the drain lead.

ATF-501P8 Typical Scattering Parameters,  $V_{DS} = 3.5V$ ,  $I_{DS} = 200\text{ mA}$

| Freq.<br>GHz | $S_{11}$ |        |      | $S_{21}$ |       |       | $S_{12}$ |       |       | $S_{22}$ |      | MSG/MAG<br>dB | K<br>factor |
|--------------|----------|--------|------|----------|-------|-------|----------|-------|-------|----------|------|---------------|-------------|
|              | Mag.     | Ang.   | dB   | Mag.     | Ang.  | dB    | Mag.     | Ang.  | Mag.  | Ang.     |      |               |             |
| 0.1          | 0.924    | -132.7 | 30.5 | 33.400   | 112.1 | -37.1 | 0.014    | 28.4  | 0.703 | -162.3   | 33.8 | 0.150         |             |
| 0.2          | 0.919    | -156.5 | 25.0 | 17.862   | 99.9  | -36.5 | 0.015    | 22.1  | 0.749 | -172.1   | 30.8 | 0.269         |             |
| 0.3          | 0.918    | -165.7 | 21.7 | 12.118   | 94.6  | -36.5 | 0.015    | 22.7  | 0.757 | -176.5   | 29.1 | 0.390         |             |
| 0.4          | 0.918    | -171.0 | 19.2 | 9.080    | 91.4  | -35.9 | 0.016    | 24.6  | 0.760 | -179.2   | 27.5 | 0.496         |             |
| 0.5          | 0.918    | -173.6 | 17.6 | 7.556    | 88.7  | -35.4 | 0.017    | 26.4  | 0.751 | 179.4    | 26.5 | 0.559         |             |
| 0.6          | 0.915    | -176.2 | 16.0 | 6.328    | 86.5  | -34.9 | 0.018    | 29.3  | 0.752 | 177.7    | 25.5 | 0.651         |             |
| 0.7          | 0.915    | -178.5 | 14.7 | 5.422    | 84.5  | -34.4 | 0.019    | 31.3  | 0.753 | 176.3    | 24.6 | 0.717         |             |
| 0.8          | 0.914    | 179.8  | 13.5 | 4.739    | 82.7  | -34.0 | 0.020    | 33.2  | 0.752 | 175.3    | 23.7 | 0.777         |             |
| 0.9          | 0.919    | 178.0  | 12.5 | 4.232    | 80.8  | -33.6 | 0.021    | 35.1  | 0.755 | 174.1    | 23.0 | 0.806         |             |
| 1            | 0.916    | 176.7  | 11.6 | 3.788    | 79.0  | -33.2 | 0.022    | 36.7  | 0.750 | 172.8    | 22.4 | 0.870         |             |
| 1.5          | 0.912    | 170.5  | 8.0  | 2.515    | 71.5  | -31.4 | 0.027    | 42.0  | 0.750 | 168.3    | 18.2 | 1.057         |             |
| 1.9          | 0.911    | 166.0  | 6.0  | 1.991    | 65.8  | -29.9 | 0.032    | 44.3  | 0.755 | 165.0    | 15.8 | 1.126         |             |
| 2            | 0.910    | 164.9  | 5.5  | 1.882    | 64.7  | -29.6 | 0.033    | 44.7  | 0.753 | 164.2    | 15.2 | 1.157         |             |
| 2.4          | 0.911    | 160.9  | 3.9  | 1.562    | 59.7  | -28.6 | 0.037    | 45.0  | 0.750 | 161.3    | 13.5 | 1.215         |             |
| 3            | 0.909    | 154.7  | 2.0  | 1.255    | 51.5  | -26.9 | 0.045    | 43.9  | 0.754 | 157.0    | 11.5 | 1.244         |             |
| 4            | 0.911    | 144.8  | -0.1 | 0.988    | 40.4  | -24.4 | 0.060    | 41.0  | 0.746 | 151.3    | 9.3  | 1.225         |             |
| 5            | 0.902    | 134.8  | -1.8 | 0.813    | 25.9  | -22.6 | 0.074    | 33.3  | 0.735 | 143.7    | 7.4  | 1.255         |             |
| 6            | 0.904    | 125.5  | -4.1 | 0.624    | 12.7  | -22.0 | 0.079    | 24.6  | 0.669 | 141.8    | 5.0  | 1.438         |             |
| 7            | 0.904    | 115.6  | -5.1 | 0.555    | 3.9   | -20.6 | 0.093    | 19.3  | 0.664 | 130.6    | 3.8  | 1.455         |             |
| 8            | 0.901    | 105.6  | -5.9 | 0.509    | -8.3  | -19.4 | 0.107    | 9.5   | 0.662 | 113.9    | 2.7  | 1.466         |             |
| 9            | 0.897    | 95.4   | -6.4 | 0.477    | -14.5 | -18.8 | 0.115    | 6.6   | 0.705 | 112.3    | 2.3  | 1.437         |             |
| 10           | 0.880    | 84.1   | -6.9 | 0.450    | -23.9 | -17.7 | 0.130    | -3.0  | 0.751 | 101.2    | 1.5  | 1.429         |             |
| 11           | 0.872    | 73.7   | -8.1 | 0.393    | -34.0 | -17.6 | 0.132    | -9.7  | 0.742 | 88.5     | 0.0  | 1.646         |             |
| 12           | 0.849    | 64.2   | -7.8 | 0.408    | -42.5 | -16.4 | 0.152    | -14.9 | 0.767 | 85.3     | 0.0  | 1.539         |             |
| 13           | 0.841    | 55.5   | -8.2 | 0.391    | -53.2 | -15.8 | 0.162    | -22.8 | 0.798 | 76.2     | -0.2 | 1.465         |             |
| 14           | 0.820    | 47.1   | -8.5 | 0.377    | -63.5 | -15.1 | 0.176    | -29.9 | 0.793 | 66.8     | -1.0 | 1.527         |             |
| 15           | 0.809    | 39.3   | -9.0 | 0.354    | -69.5 | -14.7 | 0.185    | -35.9 | 0.754 | 63.6     | -2.1 | 1.708         |             |
| 16           | 0.794    | 32.7   | -9.1 | 0.350    | -84.1 | -13.6 | 0.210    | -43.1 | 0.785 | 49.8     | -2.1 | 1.543         |             |
| 17           | 0.770    | 25.8   | -9.6 | 0.332    | -89.0 | -12.6 | 0.234    | -50.5 | 0.776 | 36.9     | -3.1 | 1.634         |             |
| 18           | 0.766    | 21.5   | -9.2 | 0.346    | -99.8 | -11.5 | 0.266    | -60.7 | 0.797 | 28.0     | -2.6 | 1.394         |             |

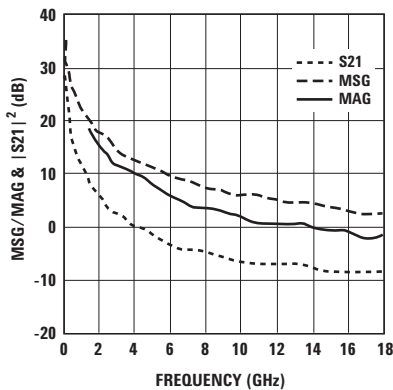


Figure 60. MSG/MAG &  $|S_{21}|^2$  vs. Frequency at 3.5V 200mA.

Notes:

1. S parameter is measured on a microstrip line made on 0.025 inch thick alumina carrier. The input reference plane is at the end of the gate lead. The output reference plane is at the end of the drain lead.

ATF-501P8 Typical Scattering Parameters,  $V_{DS} = 3.5V$ ,  $I_{DS} = 360\text{ mA}$

| Freq.<br>GHz | $S_{11}$ |        |      | $S_{21}$ |       |       | $S_{12}$ |       |       | $S_{22}$ |      | MSG/MAG<br>dB | K<br>factor |
|--------------|----------|--------|------|----------|-------|-------|----------|-------|-------|----------|------|---------------|-------------|
|              | Mag.     | Ang.   | dB   | Mag.     | Ang.  | dB    | Mag.     | Ang.  | Mag.  | Ang.     |      |               |             |
| 0.1          | 0.919    | -134.2 | 30.8 | 34.576   | 111.7 | -39.2 | 0.011    | 29.6  | 0.722 | -166.1   | 35.0 | 0.191         |             |
| 0.2          | 0.920    | -157.3 | 25.3 | 18.445   | 99.7  | -38.4 | 0.012    | 25.5  | 0.763 | -174.1   | 31.9 | 0.336         |             |
| 0.3          | 0.921    | -166.4 | 21.9 | 12.499   | 94.6  | -37.7 | 0.013    | 26.7  | 0.771 | -177.8   | 29.8 | 0.460         |             |
| 0.4          | 0.918    | -171.4 | 19.4 | 9.372    | 91.5  | -37.7 | 0.013    | 30.0  | 0.773 | 179.8    | 28.6 | 0.599         |             |
| 0.5          | 0.915    | -174.0 | 17.8 | 7.792    | 88.8  | -36.5 | 0.015    | 32.7  | 0.763 | 178.6    | 27.2 | 0.665         |             |
| 0.6          | 0.916    | -176.7 | 16.3 | 6.537    | 86.6  | -35.9 | 0.016    | 35.7  | 0.765 | 176.9    | 26.1 | 0.744         |             |
| 0.7          | 0.916    | -178.9 | 15.0 | 5.596    | 84.7  | -35.4 | 0.017    | 37.9  | 0.765 | 175.6    | 25.2 | 0.809         |             |
| 0.8          | 0.914    | 179.4  | 13.8 | 4.888    | 83.1  | -34.9 | 0.018    | 40.0  | 0.764 | 174.9    | 24.3 | 0.871         |             |
| 0.9          | 0.919    | 178.1  | 12.8 | 4.370    | 81.1  | -34.4 | 0.019    | 41.8  | 0.768 | 173.4    | 23.6 | 0.892         |             |
| 1            | 0.914    | 176.2  | 11.8 | 3.911    | 79.3  | -34.0 | 0.020    | 43.0  | 0.762 | 172.2    | 22.9 | 0.963         |             |
| 1.5          | 0.912    | 170.2  | 8.3  | 2.596    | 72.2  | -31.7 | 0.026    | 47.8  | 0.761 | 168.1    | 18.0 | 1.103         |             |
| 2            | 0.914    | 165.8  | 6.3  | 2.059    | 66.7  | -30.2 | 0.031    | 49.2  | 0.766 | 163.8    | 15.9 | 1.142         |             |
| 2.5          | 0.910    | 164.7  | 5.8  | 1.940    | 65.6  | -29.9 | 0.032    | 49.3  | 0.765 | 160.9    | 15.2 | 1.185         |             |
| 3            | 0.912    | 160.8  | 4.2  | 1.618    | 60.7  | -28.6 | 0.037    | 49.0  | 0.761 | 156.6    | 13.6 | 1.210         |             |
| 4            | 0.913    | 154.4  | 2.3  | 1.296    | 52.9  | -26.9 | 0.045    | 47.3  | 0.765 | 150.8    | 11.8 | 1.221         |             |
| 5            | 0.908    | 144.7  | 0.2  | 1.023    | 42.0  | -24.4 | 0.060    | 43.2  | 0.756 | 143.0    | 9.4  | 1.236         |             |
| 6            | 0.903    | 134.5  | -1.5 | 0.844    | 27.9  | -22.5 | 0.075    | 34.8  | 0.745 | 141.1    | 7.6  | 1.233         |             |
| 7            | 0.906    | 125.5  | -3.8 | 0.647    | 15.0  | -21.9 | 0.080    | 25.7  | 0.676 | 129.9    | 5.3  | 1.392         |             |
| 8            | 0.904    | 115.1  | -4.7 | 0.582    | 5.9   | -20.6 | 0.093    | 20.3  | 0.670 | 113.3    | 4.1  | 1.430         |             |
| 9            | 0.902    | 105.3  | -5.5 | 0.532    | -6.4  | -19.4 | 0.107    | 10.3  | 0.666 | 111.6    | 3.1  | 1.433         |             |
| 10           | 0.893    | 95.0   | -5.8 | 0.513    | -13.3 | -18.8 | 0.115    | 7.5   | 0.710 | 100.7    | 2.7  | 1.416         |             |
| 11           | 0.881    | 84.1   | -6.5 | 0.474    | -22.0 | -17.7 | 0.131    | -1.9  | 0.756 | 88.2     | 1.9  | 1.388         |             |
| 12           | 0.873    | 73.6   | -7.6 | 0.417    | -32.9 | -17.5 | 0.133    | -8.5  | 0.746 | 84.9     | 0.5  | 1.577         |             |
| 13           | 0.847    | 63.9   | -7.5 | 0.424    | -40.6 | -16.2 | 0.154    | -13.9 | 0.772 | 75.7     | 0.2  | 1.507         |             |
| 14           | 0.844    | 55.4   | -7.8 | 0.407    | -52.7 | -15.7 | 0.165    | -22.0 | 0.802 | 66.3     | 0.1  | 1.407         |             |
| 15           | 0.827    | 47.4   | -8.2 | 0.389    | -63.7 | -14.9 | 0.180    | -29.7 | 0.793 | 63.2     | -0.7 | 1.457         |             |
| 16           | 0.818    | 40.2   | -8.9 | 0.357    | -67.9 | -14.6 | 0.187    | -35.8 | 0.759 | 49.4     | -1.9 | 1.637         |             |
| 17           | 0.799    | 32.9   | -9.0 | 0.353    | -81.4 | -13.5 | 0.211    | -43.1 | 0.786 | 36.5     | -2.0 | 1.526         |             |
| 18           | 0.780    | 26.7   | -9.3 | 0.344    | -90.7 | -12.5 | 0.236    | -50.4 | 0.777 | 27.6     | -2.7 | 1.549         |             |

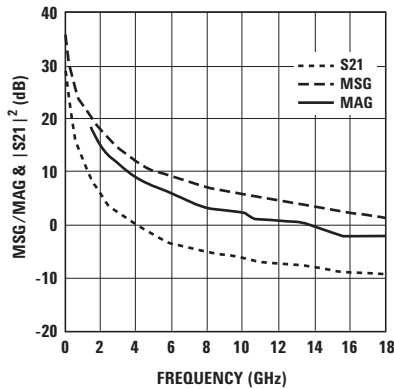


Figure 61. MSG/MAG &  $|S_{21}|^2$  vs. Frequency at 3.5V 360mA.

Notes:

1. S parameter is measured on a microstrip line made on 0.025 inch thick alumina carrier. The input reference plane is at the end of the gate lead. The output reference plane is at the end of the drain lead.



ATF-501P8 Typical Scattering Parameters,  $V_{DS} = 5.5V$ ,  $I_{DS} = 280\text{ mA}$

| Freq.<br>GHz | $S_{11}$ |        |       | $S_{21}$ |       |       | $S_{12}$ |       |       | $S_{22}$ |      | MSG/MAG<br>dB | K<br>factor |
|--------------|----------|--------|-------|----------|-------|-------|----------|-------|-------|----------|------|---------------|-------------|
|              | Mag.     | Ang.   | dB    | Mag.     | Ang.  | dB    | Mag.     | Ang.  | Mag.  | Ang.     |      |               |             |
| 0.1          | 0.914    | -131.5 | 31.8  | 39.087   | 112.6 | -38.4 | 0.012    | 29.6  | 0.618 | -158.7   | 35.1 | 0.172         |             |
| 0.2          | 0.912    | -155.7 | 26.4  | 20.961   | 100.1 | -37.7 | 0.013    | 23.9  | 0.661 | -170.0   | 32.1 | 0.307         |             |
| 0.3          | 0.914    | -165.2 | 23.1  | 14.228   | 94.5  | -37.1 | 0.014    | 24.1  | 0.670 | -174.9   | 30.1 | 0.420         |             |
| 0.4          | 0.913    | -170.5 | 20.6  | 10.678   | 91.1  | -37.1 | 0.014    | 26.7  | 0.674 | -177.9   | 28.8 | 0.550         |             |
| 0.5          | 0.909    | -173.3 | 19.0  | 8.871    | 88.3  | -36.5 | 0.015    | 29.0  | 0.662 | -179.3   | 27.7 | 0.638         |             |
| 0.6          | 0.910    | -176.0 | 17.4  | 7.417    | 86.0  | -35.9 | 0.016    | 31.7  | 0.663 | -179.2   | 26.7 | 0.715         |             |
| 0.7          | 0.911    | -178.2 | 16.1  | 6.365    | 83.9  | -35.4 | 0.017    | 34.3  | 0.666 | -177.8   | 25.7 | 0.782         |             |
| 0.8          | 0.908    | -179.8 | 14.9  | 5.577    | 81.8  | -34.9 | 0.018    | 36.0  | 0.667 | -176.3   | 24.9 | 0.850         |             |
| 0.9          | 0.913    | -178.4 | 13.9  | 4.956    | 79.9  | -34.4 | 0.019    | 38.0  | 0.664 | -175.7   | 24.2 | 0.878         |             |
| 1            | 0.907    | -176.7 | 13.0  | 4.446    | 78.0  | -34.0 | 0.020    | 39.4  | 0.664 | -174.5   | 23.5 | 0.958         |             |
| 1.5          | 0.903    | -170.5 | 9.4   | 2.951    | 69.6  | -32.0 | 0.025    | 44.5  | 0.672 | -170.1   | 18.4 | 1.141         |             |
| 2            | 0.905    | -166.2 | 7.4   | 2.331    | 63.5  | -30.5 | 0.030    | 46.4  | 0.674 | -166.5   | 16.3 | 1.182         |             |
| 2.5          | 0.903    | -165.2 | 6.8   | 2.197    | 62.1  | -30.2 | 0.031    | 47.0  | 0.674 | -164.0   | 15.7 | 1.222         |             |
| 3            | 0.903    | -161.0 | 5.2   | 1.822    | 56.7  | -29.1 | 0.035    | 47.3  | 0.672 | -160.3   | 14.0 | 1.284         |             |
| 4            | 0.900    | -154.7 | 3.3   | 1.455    | 47.9  | -27.3 | 0.043    | 46.7  | 0.685 | -155.2   | 12.0 | 1.307         |             |
| 5            | 0.902    | -145.0 | 1.1   | 1.129    | 35.9  | -24.9 | 0.057    | 43.8  | 0.679 | -148.6   | 9.8  | 1.278         |             |
| 6            | 0.895    | -134.9 | -0.8  | 0.916    | 20.6  | -23.0 | 0.071    | 36.2  | 0.681 | -147.0   | 8.0  | 1.271         |             |
| 7            | 0.903    | -125.8 | -3.2  | 0.695    | 6.8   | -22.3 | 0.077    | 28.3  | 0.648 | -135.8   | 6.1  | 1.340         |             |
| 8            | 0.898    | -115.4 | -4.2  | 0.616    | -3.5  | -20.8 | 0.091    | 22.9  | 0.641 | -119.2   | 4.5  | 1.401         |             |
| 9            | 0.898    | -105.8 | -5.3  | 0.546    | -16.3 | -19.6 | 0.105    | 13.3  | 0.636 | -117.2   | 3.3  | 1.416         |             |
| 10           | 0.884    | -95.4  | -6.0  | 0.499    | -23.2 | -18.9 | 0.114    | 10.9  | 0.694 | -106.2   | 2.4  | 1.459         |             |
| 11           | 0.871    | -84.6  | -6.8  | 0.458    | -31.5 | -17.6 | 0.132    | 1.6   | 0.741 | -92.7    | 1.6  | 1.420         |             |
| 12           | 0.864    | -74.2  | -8.3  | 0.386    | -43.6 | -17.3 | 0.137    | -5.2  | 0.731 | -89.5    | -0.2 | 1.655         |             |
| 13           | 0.849    | -64.8  | -8.3  | 0.385    | -49.9 | -15.8 | 0.162    | -11.5 | 0.768 | -79.6    | -0.3 | 1.479         |             |
| 14           | 0.854    | -56.1  | -8.7  | 0.366    | -60.4 | -15.2 | 0.174    | -20.9 | 0.804 | -70.2    | -0.2 | 1.332         |             |
| 15           | 0.841    | -47.7  | -9.6  | 0.330    | -68.9 | -14.4 | 0.191    | -29.9 | 0.807 | -66.7    | -1.3 | 1.385         |             |
| 16           | 0.834    | -40.0  | -10.0 | 0.317    | -73.5 | -14.1 | 0.198    | -37.0 | 0.768 | -52.4    | -2.3 | 1.536         |             |
| 17           | 0.824    | -31.9  | -10.2 | 0.310    | -83.2 | -13.2 | 0.219    | -45.0 | 0.792 | -39.7    | -2.5 | 1.466         |             |
| 18           | 0.813    | -24.7  | -10.7 | 0.291    | -88.9 | -12.4 | 0.240    | -52.2 | 0.788 | -30.0    | -3.5 | 1.533         |             |

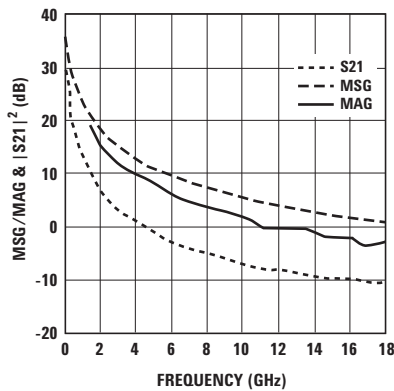



Figure 62. MSG/MAG &  $|S_{21}|^2$  vs. Frequency at 5.5V 280mA.

Notes:

1. S parameter is measured on a microstrip line made on 0.025 inch thick alumina carrier. The input reference plane is at the end of the gate lead. The output reference plane is at the end of the drain lead.

ATF-501P8 Typical Scattering Parameters,  $V_{DS} = 5.5V$ ,  $I_{DS} = 200\text{ mA}$

| Freq.<br>GHz | $S_{11}$ |        |       | $S_{21}$ |       |       | $S_{12}$ |       |       | $S_{22}$ |      | MSG/MAG<br>dB | K<br>factor |
|--------------|----------|--------|-------|----------|-------|-------|----------|-------|-------|----------|------|---------------|-------------|
|              | Mag.     | Ang.   | dB    | Mag.     | Ang.  | dB    | Mag.     | Ang.  | Mag.  | Ang.     |      |               |             |
| 0.1          | 0.921    | -130.1 | 31.8  | 38.725   | 113.1 | -37.7 | 0.013    | 29.6  | 0.615 | -156.5   | 34.7 | 0.145         |             |
| 0.2          | 0.914    | -155.0 | 26.4  | 20.822   | 100.3 | -37.1 | 0.014    | 22.8  | 0.659 | -168.9   | 31.7 | 0.274         |             |
| 0.3          | 0.914    | -164.6 | 23.0  | 14.136   | 94.7  | -36.5 | 0.015    | 22.7  | 0.669 | -174.1   | 29.7 | 0.385         |             |
| 0.4          | 0.913    | -170.1 | 20.5  | 10.611   | 91.3  | -36.5 | 0.015    | 24.9  | 0.673 | -177.3   | 28.5 | 0.510         |             |
| 0.5          | 0.909    | -172.9 | 18.9  | 8.824    | 88.4  | -35.4 | 0.017    | 26.8  | 0.662 | -178.9   | 27.2 | 0.576         |             |
| 0.6          | 0.909    | -175.7 | 17.4  | 7.375    | 86.0  | -35.4 | 0.017    | 29.4  | 0.662 | 179.6    | 26.4 | 0.672         |             |
| 0.7          | 0.909    | -178.1 | 16.0  | 6.329    | 83.9  | -34.9 | 0.018    | 31.3  | 0.665 | 178.2    | 25.5 | 0.739         |             |
| 0.8          | 0.908    | -179.7 | 14.9  | 5.549    | 81.8  | -34.4 | 0.019    | 32.9  | 0.667 | 176.5    | 24.7 | 0.798         |             |
| 0.9          | 0.911    | 178.5  | 13.8  | 4.922    | 80.0  | -34.0 | 0.020    | 35.3  | 0.662 | 176.0    | 23.9 | 0.843         |             |
| 1            | 0.909    | 176.8  | 12.9  | 4.418    | 78.0  | -33.6 | 0.021    | 36.4  | 0.664 | 174.8    | 23.2 | 0.897         |             |
| 1.5          | 0.905    | 170.8  | 9.3   | 2.933    | 69.4  | -31.7 | 0.026    | 41.7  | 0.673 | 170.3    | 18.8 | 1.079         |             |
| 2            | 0.907    | 166.3  | 7.3   | 2.322    | 63.4  | -30.5 | 0.030    | 44.3  | 0.674 | 166.6    | 16.5 | 1.153         |             |
| 2.5          | 0.903    | 165.3  | 6.8   | 2.182    | 62.1  | -30.2 | 0.031    | 44.5  | 0.673 | 164.1    | 15.7 | 1.208         |             |
| 3            | 0.906    | 161.2  | 5.2   | 1.815    | 56.5  | -28.9 | 0.036    | 45.1  | 0.671 | 160.4    | 14.2 | 1.226         |             |
| 4            | 0.903    | 155.0  | 3.2   | 1.447    | 47.8  | -27.3 | 0.043    | 44.7  | 0.684 | 155.3    | 12.1 | 1.273         |             |
| 5            | 0.904    | 145.1  | 1.0   | 1.123    | 35.9  | -24.9 | 0.057    | 42.3  | 0.678 | 148.7    | 9.9  | 1.257         |             |
| 6            | 0.899    | 135.2  | -0.8  | 0.909    | 20.3  | -23.0 | 0.071    | 35.1  | 0.681 | 147.2    | 8.2  | 1.235         |             |
| 7            | 0.904    | 126.2  | -3.2  | 0.693    | 6.5   | -22.4 | 0.076    | 27.4  | 0.647 | 136.0    | 6.2  | 1.332         |             |
| 8            | 0.901    | 115.6  | -4.3  | 0.608    | -4.0  | -20.9 | 0.090    | 22.2  | 0.640 | 119.4    | 4.6  | 1.386         |             |
| 9            | 0.896    | 106.2  | -5.4  | 0.536    | -15.9 | -19.7 | 0.104    | 12.6  | 0.634 | 117.5    | 3.1  | 1.459         |             |
| 10           | 0.891    | 95.4   | -6.1  | 0.497    | -23.9 | -18.9 | 0.113    | 10.2  | 0.692 | 106.3    | 2.6  | 1.408         |             |
| 11           | 0.877    | 85.0   | -7.0  | 0.446    | -32.3 | -17.7 | 0.131    | 1.0   | 0.739 | 92.9     | 1.5  | 1.403         |             |
| 12           | 0.871    | 74.4   | -8.3  | 0.386    | -42.5 | -17.4 | 0.135    | -5.8  | 0.730 | 89.7     | -0.1 | 1.625         |             |
| 13           | 0.851    | 64.9   | -8.2  | 0.387    | -49.0 | -15.9 | 0.160    | -11.8 | 0.767 | 79.8     | -0.3 | 1.480         |             |
| 14           | 0.850    | 56.2   | -8.8  | 0.364    | -60.0 | -15.3 | 0.172    | -21.0 | 0.803 | 70.5     | -0.3 | 1.364         |             |
| 15           | 0.839    | 48.0   | -9.5  | 0.335    | -67.9 | -14.5 | 0.188    | -29.9 | 0.805 | 66.9     | -1.3 | 1.403         |             |
| 16           | 0.834    | 39.7   | -10.2 | 0.309    | -72.5 | -14.2 | 0.195    | -36.8 | 0.768 | 52.7     | -2.5 | 1.585         |             |
| 17           | 0.827    | 32.2   | -10.2 | 0.309    | -82.4 | -13.3 | 0.216    | -44.6 | 0.792 | 39.9     | -2.5 | 1.472         |             |
| 18           | 0.814    | 24.4   | -10.5 | 0.298    | -89.4 | -12.5 | 0.238    | -51.8 | 0.790 | 30.2     | -3.2 | 1.510         |             |

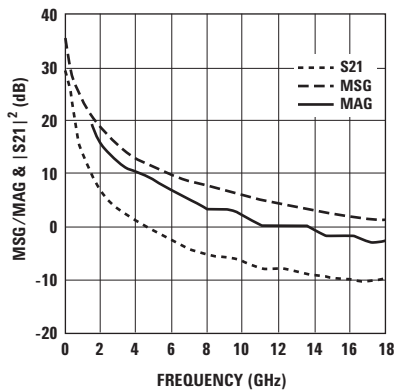

Notes:

1. S parameter is measured on a microstrip line made on 0.025 inch thick alumina carrier. The input reference plane is at the end of the gate lead. The output reference plane is at the end of the drain lead.

Figure 63. MSG/MAG &  $|S_{21}|^2$  vs. Frequency at 5.5V 200mA.

ATF-501P8 Typical Scattering Parameters,  $V_{DS} = 5.5V$ ,  $I_{DS} = 360\text{ mA}$

| Freq.<br>GHz | $S_{11}$ |        |       | $S_{21}$ |       |       | $S_{12}$ |       |       | $S_{22}$ |      | MSG/MAG<br>dB | K<br>factor |
|--------------|----------|--------|-------|----------|-------|-------|----------|-------|-------|----------|------|---------------|-------------|
|              | Mag.     | Ang.   | dB    | Mag.     | Ang.  | dB    | Mag.     | Ang.  | Mag.  | Ang.     |      |               |             |
| 0.1          | 0.904    | -132.0 | 31.8  | 38.785   | 113.0 | -39.2 | 0.011    | 29.8  | 0.619 | -159.9   | 35.5 | 0.198         |             |
| 0.2          | 0.910    | -156.2 | 26.4  | 20.860   | 100.3 | -38.4 | 0.012    | 24.8  | 0.662 | -170.6   | 32.4 | 0.338         |             |
| 0.3          | 0.912    | -165.4 | 23.0  | 14.161   | 94.7  | -37.7 | 0.013    | 25.5  | 0.672 | -175.3   | 30.4 | 0.459         |             |
| 0.4          | 0.912    | -170.7 | 20.5  | 10.635   | 91.2  | -37.1 | 0.014    | 27.8  | 0.675 | -178.2   | 28.8 | 0.571         |             |
| 0.5          | 0.907    | -173.5 | 18.9  | 8.834    | 88.4  | -36.5 | 0.015    | 30.5  | 0.663 | -179.5   | 27.7 | 0.666         |             |
| 0.6          | 0.909    | -176.1 | 17.4  | 7.399    | 86.1  | -35.9 | 0.016    | 33.4  | 0.664 | -178.9   | 26.7 | 0.741         |             |
| 0.7          | 0.909    | -178.3 | 16.0  | 6.337    | 83.9  | -35.4 | 0.017    | 35.7  | 0.666 | -177.6   | 25.7 | 0.808         |             |
| 0.8          | 0.907    | -179.9 | 14.9  | 5.557    | 81.9  | -35.4 | 0.017    | 37.6  | 0.668 | -176.2   | 25.1 | 0.901         |             |
| 0.9          | 0.909    | -178.4 | 13.9  | 4.942    | 80.0  | -34.9 | 0.018    | 39.7  | 0.665 | -175.5   | 24.4 | 0.943         |             |
| 1            | 0.906    | -176.7 | 12.9  | 4.429    | 78.0  | -34.4 | 0.019    | 41.2  | 0.665 | -174.3   | 23.7 | 1.008         |             |
| 1.5          | 0.904    | -170.5 | 9.4   | 2.941    | 69.7  | -32.0 | 0.025    | 46.2  | 0.672 | -170.1   | 18.4 | 1.150         |             |
| 2            | 0.904    | -166.1 | 7.3   | 2.325    | 63.6  | -30.8 | 0.029    | 47.9  | 0.676 | -166.5   | 16.2 | 1.225         |             |
| 2.5          | 0.900    | -165.1 | 6.8   | 2.191    | 62.2  | -30.2 | 0.031    | 48.4  | 0.675 | -163.9   | 15.5 | 1.254         |             |
| 3            | 0.905    | -161.0 | 5.2   | 1.817    | 56.6  | -29.1 | 0.035    | 48.6  | 0.674 | -160.2   | 14.0 | 1.278         |             |
| 4            | 0.900    | -155.0 | 3.3   | 1.456    | 48.2  | -27.5 | 0.042    | 47.4  | 0.686 | -155.1   | 12.0 | 1.329         |             |
| 5            | 0.904    | -144.9 | 1.1   | 1.130    | 35.7  | -24.9 | 0.057    | 44.4  | 0.680 | -148.5   | 9.9  | 1.267         |             |
| 6            | 0.897    | -134.8 | -0.8  | 0.913    | 20.7  | -23.0 | 0.071    | 36.8  | 0.683 | -146.9   | 8.0  | 1.264         |             |
| 7            | 0.902    | -125.7 | -3.2  | 0.695    | 7.3   | -22.3 | 0.077    | 28.9  | 0.649 | -135.8   | 6.0  | 1.359         |             |
| 8            | 0.899    | -115.5 | -4.3  | 0.609    | -3.7  | -20.8 | 0.091    | 23.4  | 0.643 | -119.1   | 4.5  | 1.402         |             |
| 9            | 0.893    | -105.9 | -5.3  | 0.544    | -16.0 | -19.6 | 0.105    | 13.8  | 0.636 | -117.1   | 3.1  | 1.470         |             |
| 10           | 0.886    | -95.4  | -6.0  | 0.499    | -23.1 | -18.9 | 0.114    | 11.7  | 0.696 | -106.1   | 2.4  | 1.447         |             |
| 11           | 0.867    | -85.0  | -6.8  | 0.455    | -31.7 | -17.5 | 0.133    | 2.3   | 0.743 | -92.6    | 1.4  | 1.439         |             |
| 12           | 0.871    | -75.0  | -8.2  | 0.389    | -43.4 | -17.2 | 0.138    | -4.6  | 0.732 | -89.3    | 0.0  | 1.589         |             |
| 13           | 0.854    | -65.6  | -8.2  | 0.387    | -49.9 | -15.7 | 0.164    | -11.0 | 0.769 | -79.4    | -0.2 | 1.436         |             |
| 14           | 0.855    | -56.8  | -8.9  | 0.360    | -61.2 | -15.1 | 0.176    | -20.4 | 0.805 | -70.0    | -0.3 | 1.323         |             |
| 15           | 0.845    | -48.1  | -9.6  | 0.330    | -68.7 | -14.3 | 0.192    | -29.6 | 0.806 | -66.4    | -1.3 | 1.371         |             |
| 16           | 0.842    | -40.7  | -10.0 | 0.315    | -72.5 | -14.0 | 0.199    | -36.7 | 0.769 | -52.1    | -2.2 | 1.502         |             |
| 17           | 0.833    | -32.6  | -10.2 | 0.309    | -82.1 | -13.2 | 0.220    | -44.6 | 0.792 | -39.4    | -2.4 | 1.436         |             |
| 18           | 0.826    | -25.5  | -10.5 | 0.299    | -87.9 | -12.3 | 0.242    | -51.8 | 0.789 | -29.7    | -3.1 | 1.457         |             |

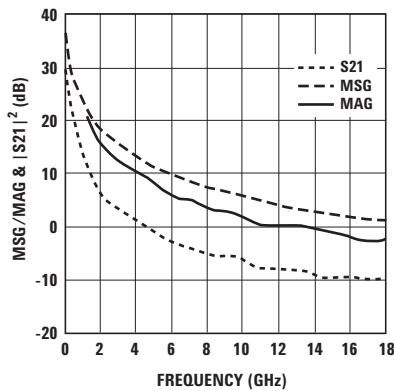


Figure 64. MSG/MAG &  $|S_{21}|^2$  vs. Frequency at 5.5V 360mA.

Notes:

1. S parameter is measured on a microstrip line made on 0.025 inch thick alumina carrier. The input reference plane is at the end of the gate lead. The output reference plane is at the end of the drain lead.


## Device Models

Refer to Avago's Web Site  
[www.Avagotech.com/view/rf](http://www.Avagotech.com/view/rf)

## Ordering Information

| Part Number   | No. of Devices | Container      |
|---------------|----------------|----------------|
| ATF-501P8-TR1 | 3000           | 7" Reel        |
| ATF-501P8-TR2 | 10000          | 13" Reel       |
| ATF-501P8-BLK | 100            | antistatic bag |


## 2x2 LPCC (JEDEC DFP-N) Package Dimensions

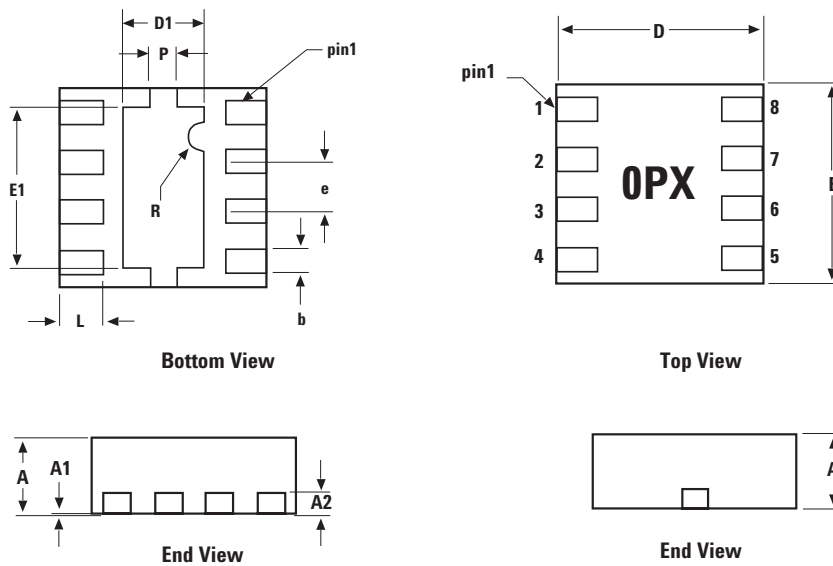


| SYMBOL | DIMENSIONS |           |           |
|--------|------------|-----------|-----------|
|        | MIN.       | NOM.      | MAX.      |
| A      | 0.70       | 0.75      | 0.80      |
| A1     | 0          | 0.02      | 0.05      |
| A2     | 0.203 REF  | 0.203 REF | 0.203 REF |
| b      | 0.225      | 0.25      | 0.275     |
| D      | 1.9        | 2.0       | 2.1       |
| D1     | 0.65       | 0.80      | 0.95      |
| E      | 1.9        | 2.0       | 2.1       |
| E1     | 1.45       | 1.6       | 1.75      |
| e      | 0.50 BSC   | 0.50 BSC  | 0.50 BSC  |

DIMENSIONS ARE IN MILLIMETERS

## PCB Land Pattern and Stencil Design

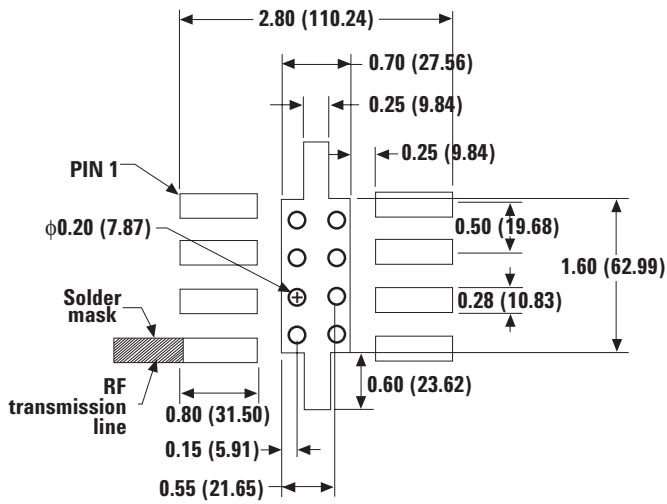

PCB Land Pattern (top view)

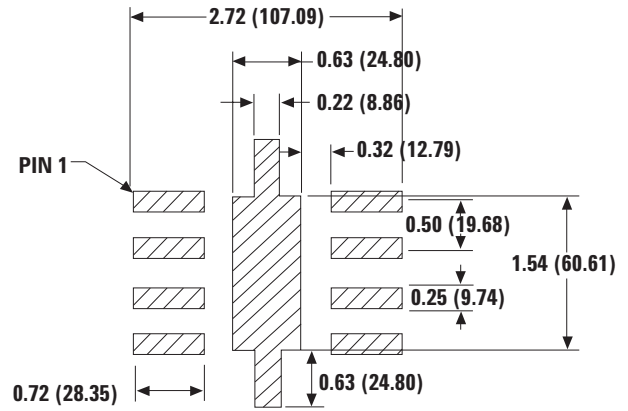



Stencil Layout (top view)

### Notes:


Typical stencil thickness is 5 mils.

Measurements are in millimeters (mils).

## Device Orientation

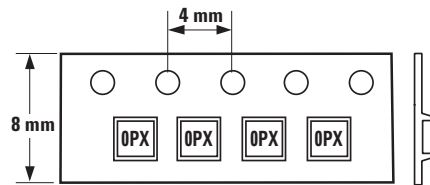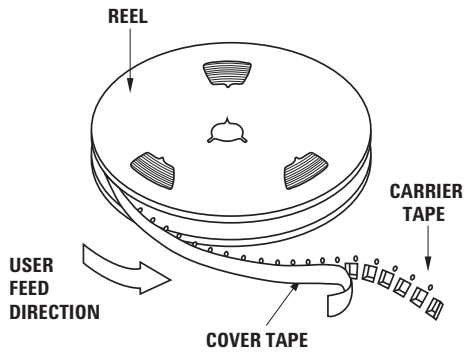

## Tape Dimensions

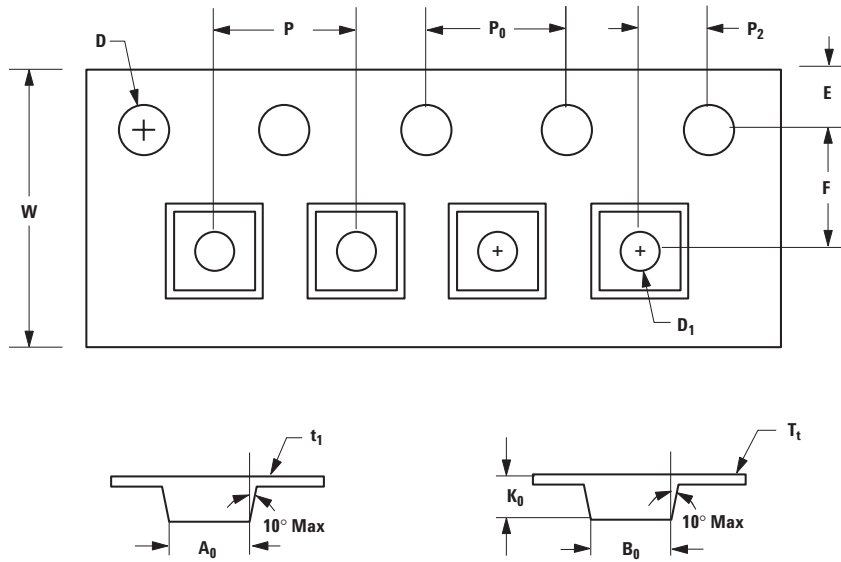

| DESCRIPTION  |   | SYMBOL | SIZE (mm)         | SIZE (inches)       |
|--------------|---|--------|-------------------|---------------------|
| CAVITY       | LENGTH                                      | $A_0$  | $2.30 \pm 0.05$   | $0.091 \pm 0.004$   |
|              | WIDTH                                       | $B_0$  | $2.30 \pm 0.05$   | $0.091 \pm 0.004$   |
|              | DEPTH                                       | $K_0$  | $1.00 \pm 0.05$   | $0.039 \pm 0.002$   |
|              | PITCH                                       | $P$    | $4.00 \pm 0.10$   | $0.157 \pm 0.004$   |
|              | BOTTOM HOLE DIAMETER                        | $D_1$  | $1.00 \pm 0.25$   | $0.039 \pm 0.002$   |
| PERFORATION  | DIAMETER                                    | $D$    | $1.50 \pm 0.10$   | $0.060 \pm 0.004$   |
|              | PITCH                                       | $P_0$  | $4.00 \pm 0.10$   | $0.157 \pm 0.004$   |
|              | POSITION                                    | $E$    | $1.75 \pm 0.10$   | $0.069 \pm 0.004$   |
| CARRIER TAPE | WIDTH                                       | $W$    | $8.00 \pm 0.30$   | $0.315 \pm 0.012$   |
|              | THICKNESS                                   | $t_1$  | $0.254 \pm 0.02$  | $0.010 \pm 0.0008$  |
| COVER TAPE   | WIDTH                                       | $C$    | $5.4 \pm 0.10$    | $0.205 \pm 0.004$   |
|              | TAPE THICKNESS                              | $T_t$  | $0.062 \pm 0.001$ | $0.0025 \pm 0.0004$ |
| DISTANCE     | CAVITY TO PERFORATION<br>(WIDTH DIRECTION)  | $F$    | $3.50 \pm 0.05$   | $0.138 \pm 0.002$   |
|              | CAVITY TO PERFORATION<br>(LENGTH DIRECTION) | $P_2$  | $2.00 \pm 0.05$   | $0.079 \pm 0.002$   |

For product information and a complete list of distributors, please go to our web site:  
[www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries.

Data subject to change. Copyright © 2006 Avago Technologies Pte. All rights reserved.  
 5988-9767EN March 31, 2006

**AVAGO**  
 TECHNOLOGIES