

Coaxial Directional Coupler

75Ω

1 to 150 MHz

ZDC-20-3-75+ ZDC-20-3-75



CASE STYLE: M22

Connectors	Model	Price	Qty.
BNC	ZDC-20-3-75(+)	\$45.95 ea.	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Coaxial Connections

INPUT	3
OUTPUT	2
COUPLED	1


Features

- excellent mainline loss, 0.35 dB typ.
- excellent directivity, 25 dB typ.
- rugged shielded case

Applications

- HF/VHF
- instrumentation
- amateur radio

Outline Drawing

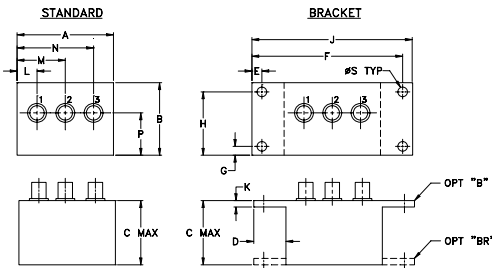

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
2.25	1.38	1.24	.50	.150	3.100	.138	1.238
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45

J	K	L	M	N	P	S	wt
3.25	.10	.40	1.15	1.86	.64	.150	grams
82.55	2.54	10.16	29.21	47.24	16.26	3.81	74.0

Directional Coupler Electrical Specifications


FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)				DIRECTIVITY (dB)			VSWR (:1)	POWER INPUT (W)						
	Nom.	Flatness	L		M		U		L		M	U	L	MU			
			Typ.	Max.	Typ.	Max.	Typ.	Max.							Typ.	Min.	Typ.
1-150	19.5±0.5	±0.75	0.35	0.8	0.35	0.8	0.35	0.8	25	20	25	20	25	20	2.0	2.0	4.0

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
 1. Mainline loss includes theoretical power loss at coupled port.


Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		Cpl
				In	Out	
1.00	0.45	19.46	41.58	25.97	24.04	24.88
1.93	0.36	19.46	47.84	29.62	26.37	27.44
9.94	0.30	19.35	56.88	32.94	30.18	31.33
20.00	0.30	19.39	43.82	35.94	30.58	28.32
46.82	0.34	19.37	35.25	34.29	29.28	22.54
73.64	0.36	19.53	43.57	30.78	28.04	18.80
85.00	0.37	19.56	33.76	29.93	27.73	17.77
119.45	0.38	19.51	31.82	28.10	26.21	14.96
146.09	0.39	19.52	30.86	28.08	25.47	13.35
150.00	0.39	19.54	29.43	27.90	25.09	13.11


ZDC-20-3-75 MAINLINE LOSS

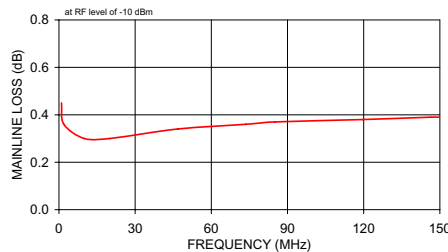


ZDC-20-3-75 COUPLING & DIRECTIVITY

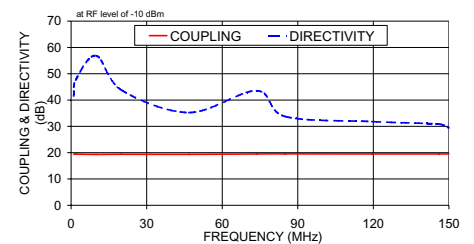

ZDC-20-3-75 RETURN LOSS

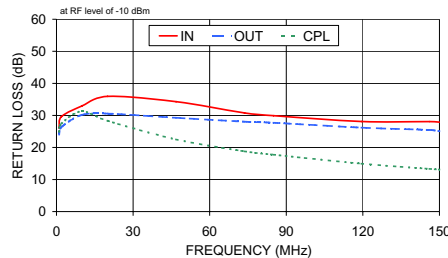

Electrical Schematic



* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. B
M119986
ZDC-20-3-75
WZ/TD/CP/AM
081112