


YG838C03R (38A) (30V / 38A)

SCHOTTKY BARRIER DIODE

■ Outline drawings, mm

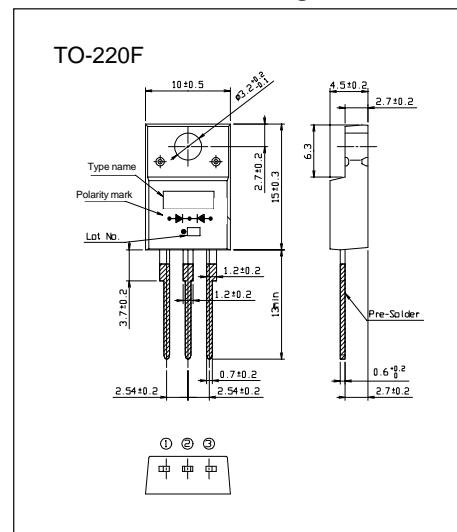


■ Features

- Low VF
- Super high speed switching
- High reliability by planer design

■ Applications

- High speed power switching

■ Connection diagram

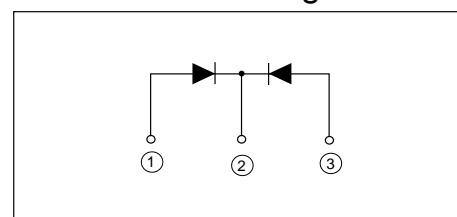

■ Maximum ratings and characteristics

- Absolute maximum ratings






Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V _{RRM}		30	V
Repetitive peak surge reverse voltage	V _{RSM}	t _w =500ns, duty=1/40	35	V
Average output current	I _O	Square wave, duty=1/2 T _c =85°C	38*	A
Surge current	I _{FSM}	Sine wave 10ms	200	A
Operating junction temperature	T _j		-40 to +150	°C
Storage temperature	T _{stg}		-40 to +150	°C

* Average forward current of centertap full wave connection


- Electrical characteristics (Ta=25°C Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V _{FM}	I _{FM} =12.5A	0.45	V
Reverse current	I _{RRM}	V _R =V _{RRM}	10	mA
Thermal resistance	R _{th(j-c)}	Junction to case	2.0	°C/W

■ Characteristics

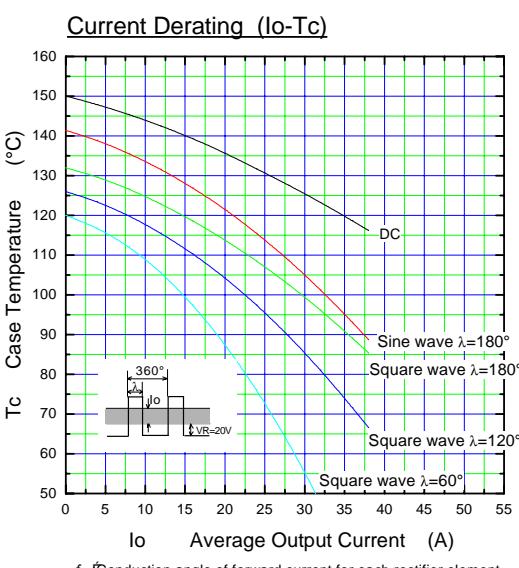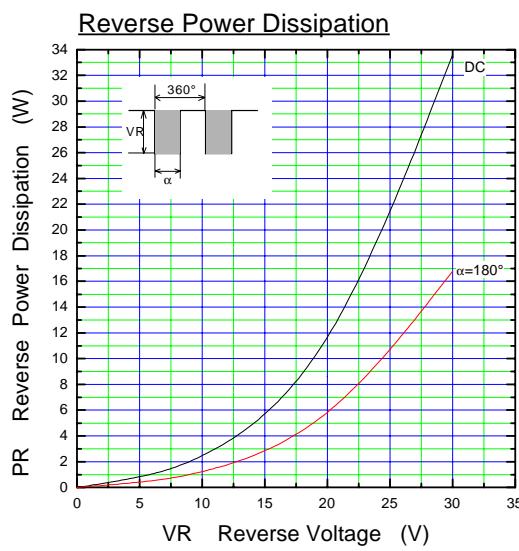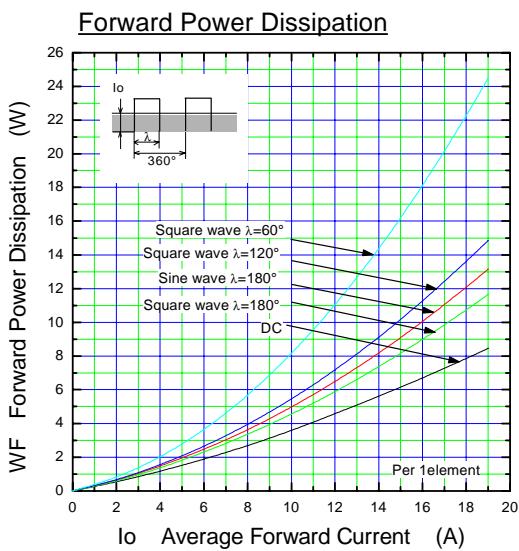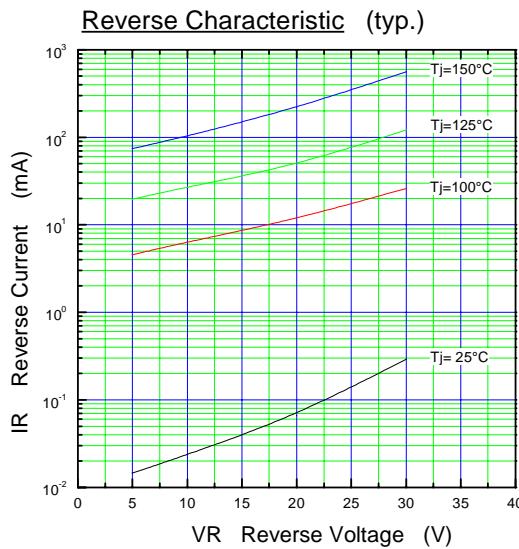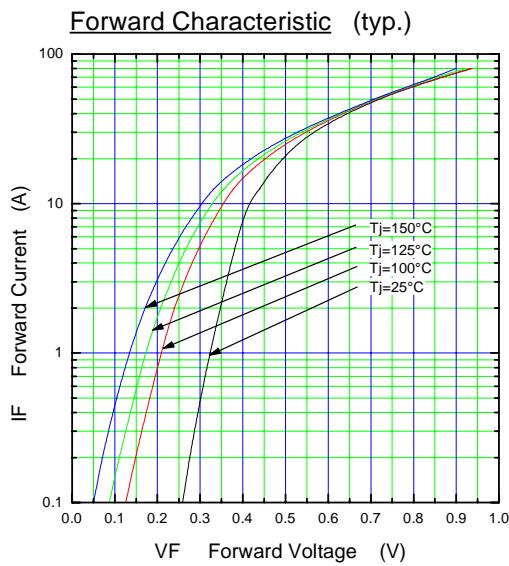

f Conduction angle of forward current for each rectifier element
Io:Output current of center-tap full wave connection

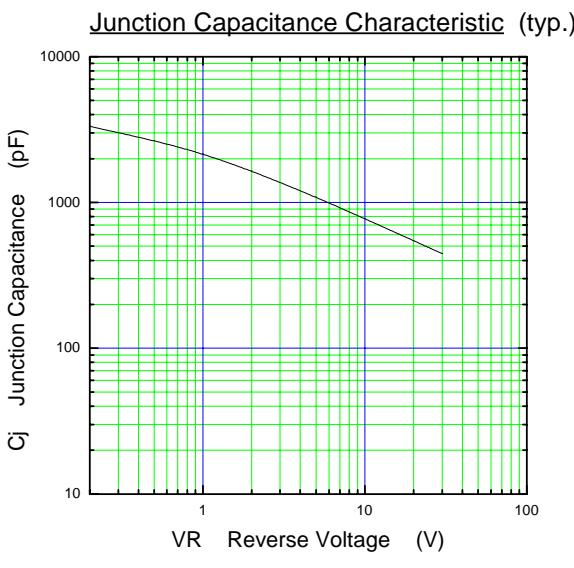

(30V / 38A)

YG838C03R (38A)

