

S1F81210M0B

Technical Manual

NOTICE

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of International Trade and Industry or other approval from another government agency.

All other product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

©SEIKO EPSON CORPORATION 2005, All rights reserved.

TABLE OF CONTENTS

1. OVERVIEW 1
2. FEATURES..... 1
3. BLOCK DIAGRAM 1
4. PINOUT 2
5. PIN DESCRIPTION 2
6. ABSOLUTE MAXIMUM RATINGS 3
7. ELECTRICAL CHARACTERISTICS 3
8. TYPICAL APPLICATIONS 3
9. OPERATION DESCRIPTION 4
10. PACKAGE DIMENSIONS 5
11. MARKINGS 5

1. OVERVIEW


The S1F81210M0B is a high efficiency step-up DC-DC converter. Due to high voltage CMOS process realizing 25V output supply as maximum value, white LED of 2–6 lights connected in series can be lighted. By connecting in series, current variation among LED is eliminated. Current value sent to white LED can be set by external resistors.

In addition, brightness can also be adjusted by PWM control to CE (chip enable) pin.

2. FEATURES


- White LED of 2-6 lights (connected in series) lighted
- Output current value can be set by external resistors
(51Ω:9.8mA, 33Ω:15.2mA, 24Ω:20.8mA)
- Brightness adjustable by PWM control of CE pin
- Current variation among LED decreased by high precision
- High efficient drive by step-up model
- Small package (SON-6P)
- Supply voltage range 2.3 to 5.5V
- Maximum output voltage 25V
- Quiescent current 400μA (Typ.)
- Standby current 1.0μA (Max.)
- R_{ON} (Switching MOS-Tr) 2Ω(typ)
- Switching frequency 1.0MHz (typ)
- Output current detection accuracy $\pm 2\%$

3. BLOCK DIAGRAM

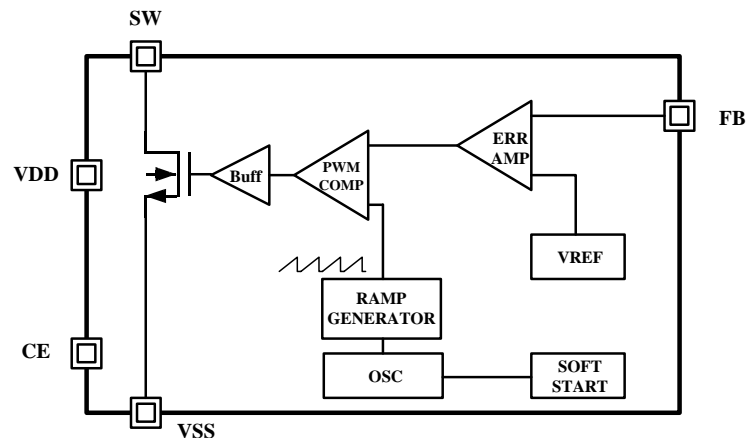

4. PINOUT

4. PINOUT

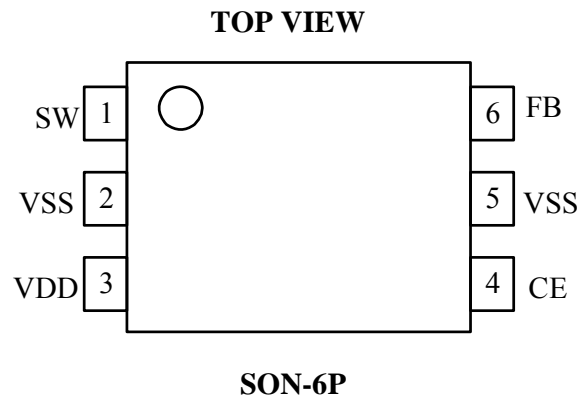

5. PIN DESCRIPTION

Number	Name	I/O	Description
1	SW	O	Coil switching
2	VSS	—	GND
3	VDD	I	Power supply
4	CE	Ip*	Chip enable (High active)
5	VSS	—	GND
6	FB		Feed back (Output current detection)

Ip* Input with built-in pull-down resistor

6. ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Rating	Unit
Supply voltage range	V_{DD}	-0.3 to 6.5	V
Input voltage range	V_{IN}	$V_{SS}-0.3$ to $V_{DD}+0.3$	V
SW output voltage range	V_{SW}	-0.3 to 27	V
SW input current	I_{SW}	500	mA
Power dissipation	P_D	250 ($T_a=25^\circ\text{C}$)	mW
Operating temperature range	T_{opr}	-40 to 85	$^\circ\text{C}$
Storage temperature range	T_{stg}	-55 to 125	$^\circ\text{C}$

7. ELECTRICAL CHARACTERISTICS

($T_a=25^\circ\text{C}$, $V_{DD}=3.6\text{[V]}$, $V_{SS}=0\text{[V]}$ unless otherwise noted)

Parameter	Pin	Symbol	Conditions	min	typ	max	Unit
Supply voltage	VDD	V_{DD}		2.3	3.6	5.5	V
Maximum output voltage	SW	V_{OUT}		—	—	25	V
Standby current	VDD	I_{STB}	$V_{CE}=0\text{[V]}$	—	—	1.0	μA
Quiescent current	VDD	I_{DD}	$V_{FB}=1.0\text{[V]}$	—	150	300	μA
			$V_{FB}=0\text{[V]}$	—	400	800	μA
SW-Tr ON resistor	SW	R_{ON}	$I_{SW}=100\text{[mA]}$, $V_{DD}=3.6\text{[V]}$	—	2.0	3.0	Ω
SW-Tr leak current	SW	I_{LEAK}	$V_{SW}=V_{DD}$	—	—	1.0	μA
Maximum oscillator frequency	SW	f_{OSC}	$V_{FB}=0\text{[V]}$	0.9	1.0	1.1	MHz
Maximum Duty	SW	Duty	$V_{FB}=0\text{[V]}$	65	75	85	%
Input voltage	CE	V_{IH}		2.0	—	—	V
		V_{IL}		—	—	0.6	V
Input current	CE	I_{CE}	$V_{CE}=3.6\text{[V]}$	—	5.0	10	μA
	FB	I_{FB}	$V_{FB}=0.5\text{[V]}$	-1.0	—	1.0	μA
Soft-start time	SW	T_{SS}		—	500	—	μs
FB voltage	FB	V_{FB}		0.49	0.50	0.51	V
Coil inductance	SW	L_{sw}		—	—	10	μH

8. TYPICAL APPLICATIONS

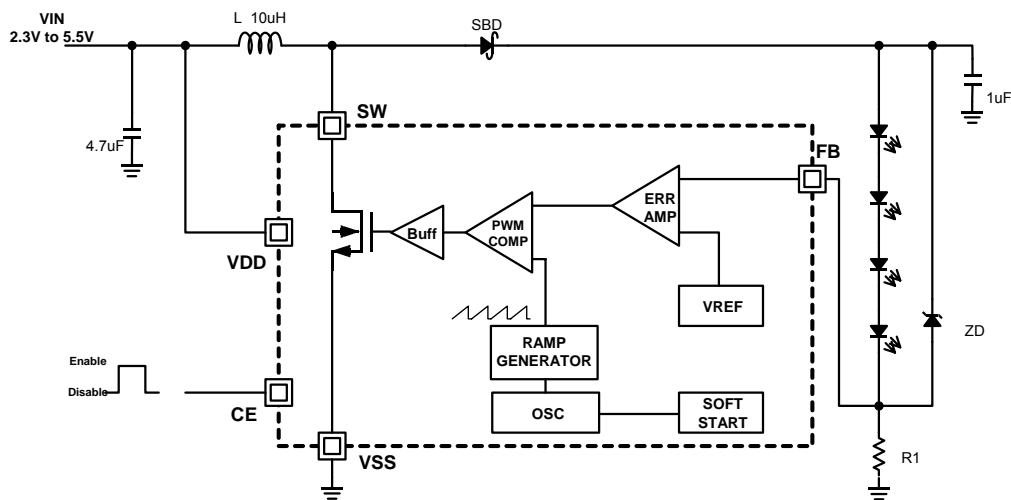

9. OPERATION DESCRIPTION

9. OPERATION DESCRIPTION

The S1F81210 can be light white LEDs of 2 to 6 in series by boosting up the input voltage using a switching regulator method. The LED current is controlled by resistor connected between FB pin and VSS pin. The range of switching duty is 0 to 75%. In case of light load (approximately 1mA), the duty is 0% and S1F81210 tends to skip pulses.

- Adjustment Method of LED current

The LED current is controlled by resistor (R1 in “TYPICAL APPLICATIONS”) connected between FB pin and VSS pin. The feedback reference is controlled at 0.5V. The LED current is shown below.


$$I_{LED}=0.5/R1$$

- Soft-start

The S1F81210 has soft start function while approximately 500μsec after starting operation. The maximum duty is limited to 50% during soft start, although it's 75% at normal operation.


- Brightness Adjustment Using CE pin

The S1F81210 is able to adjust the mean current of LED by the clock signal duty input to CE pin. The recommended frequency range is 100 to 400Hz and the duty is 10 to 90%, when the clock signal is input to CE pin.

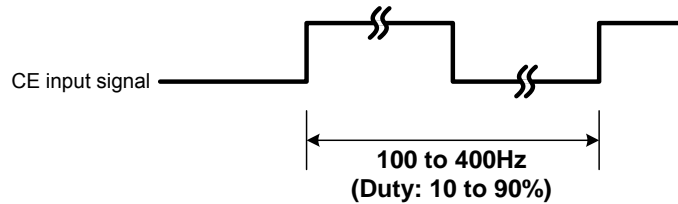


10. PACKAGE DIMENSIONS
(Weight: 0.08g)

(Plate of PIN: Sn-Ag)
[Unit : mm]

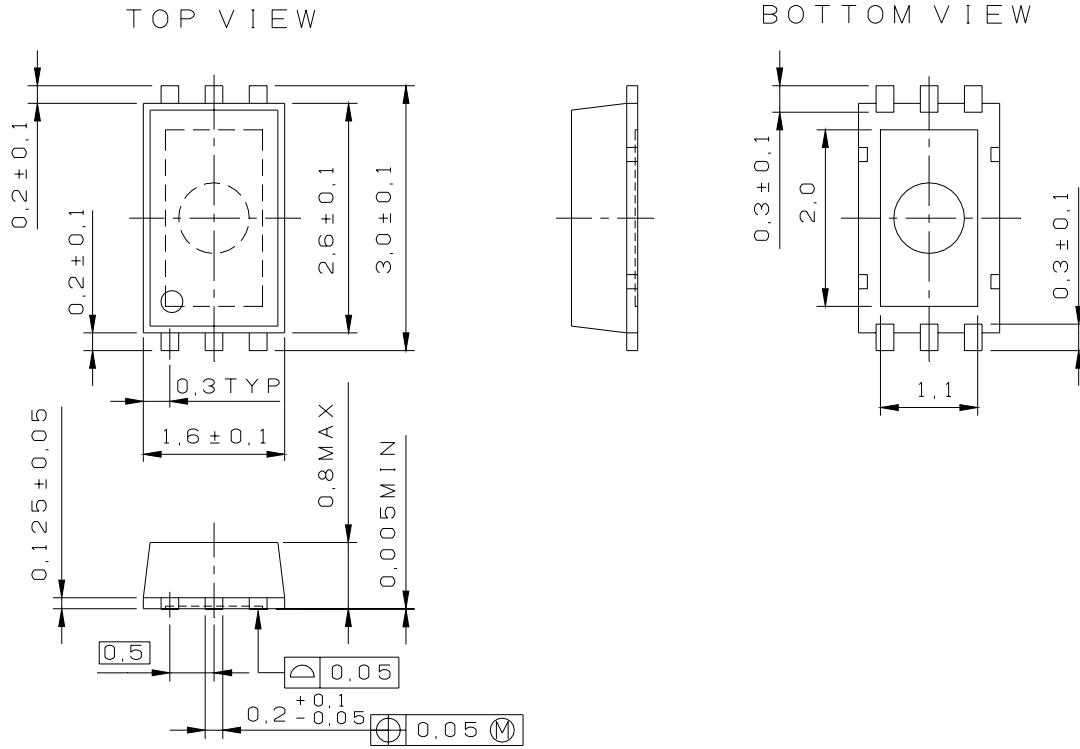

11. MARKINGS

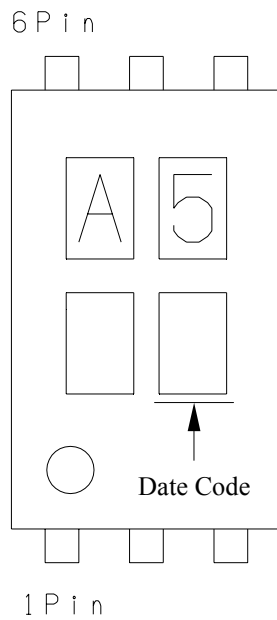

AMERICA

EPSON ELECTRONICS AMERICA, INC.

HEADQUARTERS

150 River Oaks Parkway
San Jose, CA 95134, U.S.A.
Phone: +1-800-228-3964 FAX: +1-408-922-0238

SALES OFFICES

West

1960 E. Grand Avenue Flr 2
El Segundo, CA 90245, U.S.A.
Phone: +1-800-249-7730 FAX: +1-310-955-5400

Central

101 Virginia Street, Suite 290
Crystal Lake, IL 60014, U.S.A.
Phone: +1-800-853-3588 FAX: +1-815-455-7633

Northeast

301 Edgewater Place, Suite 210
Wakefield, MA 01880, U.S.A.
Phone: +1-800-922-7667 FAX: +1-781-246-5443

Southeast

3010 Royal Blvd. South, Suite 170
Alpharetta, GA 30005, U.S.A.
Phone: +1-877-332-0020 FAX: +1-770-777-2637

EUROPE

EPSON EUROPE ELECTRONICS GmbH

HEADQUARTERS

Riesstrasse 15
80992 Munich, GERMANY
Phone: +49-89-14005-0 FAX: +49-89-14005-110

DÜSSELDORF BRANCH OFFICE

Altstadtstrasse 176
51379 Leverkusen, GERMANY
Phone: +49-2171-5045-0 FAX: +49-2171-5045-10

FRENCH BRANCH OFFICE

1 Avenue de l'Atlantique, LP 915 Les Conquerants
Z.A. de Courtaboeuf 2, F-91976 Les Ulis Cedex, FRANCE
Phone: +33-1-64862350 FAX: +33-1-64862355

BARCELONA BRANCH OFFICE

Barcelona Design Center

Edificio Testa, C/Alcalde Barnils 64-68, Modulo C 2a planta
E-08190 Sant Cugat del Vallès, SPAIN
Phone: +34-93-544-2490 FAX: +34-93-544-2491

UK & IRELAND BRANCH OFFICE

8 The Square, Stockley Park, Uxbridge
Middx UB11 1FW, UNITED KINGDOM
Phone: +44-1295-750-216/+44-1342-824451
FAX: +44-89-14005 446/447

Scotland Design Center

Integration House, The Alba Campus
Livingston West Lothian, EH54 7EG, SCOTLAND
Phone: +44-1506-605040 FAX: +44-1506-605041

ASIA

EPSON (CHINA) CO., LTD.

23F, Beijing Silver Tower 2# North RD DongSanHuan
ChaoYang District, Beijing, CHINA
Phone: +86-10-6410-6655 FAX: +86-10-6410-7320

SHANGHAI BRANCH

7F, High-Tech Bldg., 900, Yishan Road,
Shanghai 200233, CHINA
Phone: +86-21-5423-5522 FAX: +86-21-5423-5512

EPSON HONG KONG LTD.

20/F., Harbour Centre, 25 Harbour Road
Wanchai, Hong Kong
Phone: +852-2585-4600 FAX: +852-2827-4346
Telex: 65542 EPSCO HX

EPSON Electronic Technology Development (Shenzhen) LTD.

12/F, Dawning Mansion, Keji South 12th Road,
Hi-Tech Park, Shenzhen
Phone: +86-755-2699-3828 FAX: +86-755-2699-3838

EPSON TAIWAN TECHNOLOGY & TRADING LTD.

14F, No. 7, Song Ren Road,
Taipei 110
Phone: +886-2-8786-6688 FAX: +886-2-8786-6677

HSINCHU OFFICE

No. 99, Jiangong Road,
Hsinchu City 300
Phone: +886-3-573-9900 FAX: +886-3-573-9169

EPSON SINGAPORE PTE., LTD.

1 HarbourFront Place,
#03-02 HarbourFront Tower One, Singapore 098633
Phone: +65-6586-5500 FAX: +65-6271-3182

SEIKO EPSON CORPORATION

KOREA OFFICE

50F, KLI 63 Bldg., 60 Yoido-dong
Youngdeungpo-Ku, Seoul, 150-763, KOREA
Phone: +82-2-784-6027 FAX: +82-2-767-3677

GUMI OFFICE

2F, Grand B/D, 457-4 Songjeong-dong,
Gumi-City, KOREA
Phone: +82-54-454-6027 FAX: +82-54-454-6093

SEIKO EPSON CORPORATION SEMICONDUCTOR OPERATIONS DIVISION

IC Sales Dept.

IC Marketing Group

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone: +81-42-587-5814 FAX: +81-42-587-5117